

DISPLAY OF THE YEAR AWARDS ISSUE

Information

December 1998

Vol. 14, No. 12


DISPLAY

SID


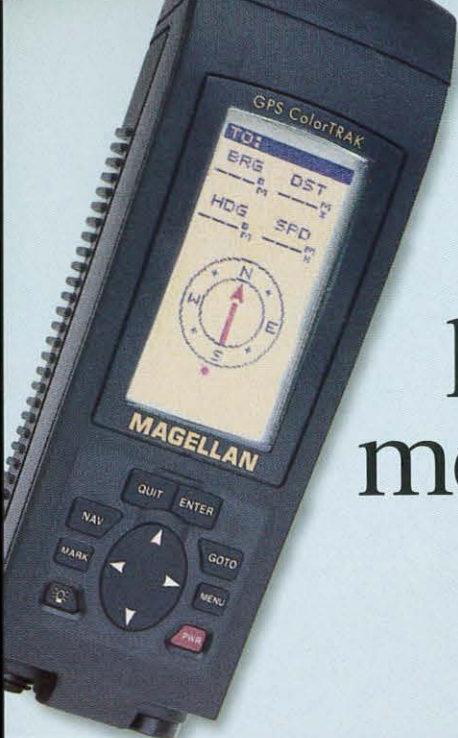
Official Monthly Publication of the Society for Information Display




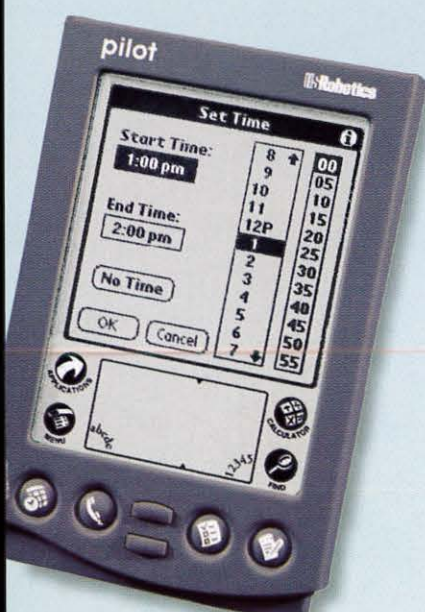
The Best of '98

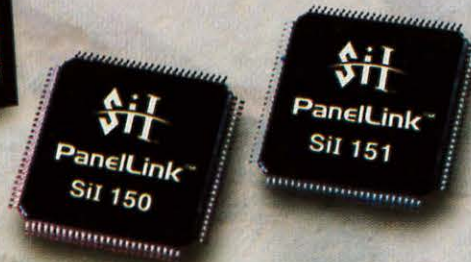

- **Display of the Year Awards**
- **Microdisplays**
- **FPD Image Scaling**
- **Military Display Dilemma**
- **Front-Projector Measurements**



The world
plans, navigates,
measures, monitors,
plays, fishes,
communicates,
computes
and
displays with
Optrex LCDs



And that's just the beginning.

The applications for LCDs keep growing and so does Optrex.

Why? Innovative engineering and design support, exceptional quality, and a nationwide distribution network. Our creative design approach allows you to develop new applications and enhance the performance of your existing products.

Most importantly, it allows **you** to create the custom or semi-custom LCDs that **turn your bright ideas into reality.**

Our customers like that. You will, too.

For more information, call (734) 416-8500, or fax (734) 416-8520 today.



OPTREX
AMERICA, INC.

44160 PLYMOUTH OAKS BLVD. • PLYMOUTH, MI 48170
(734) 416-8500 • FAX: (734) 416-8520
lcdinfo@optrexusa.com

Circle no. 1



Earlier than industry watchers expected, Tohoku Pioneer has solved the problems of making a practical OLED display, and parent company Pioneer is including it in its GD-F1 FM Multiplex Automotive Receiver for receiving text messages from the VISC traffic-information system. The OLED earned the SID/Information Display Display of the Year Gold Award. To learn about this and the other five awards, see the article beginning on p. 12.



Credit: Tohoku Pioneer, Hughes-JVC, Silicon Image, Dai Nippon

For more on what's coming in *Information Display*, and for other news on information-display technology, check the SID Web site on the World Wide Web: <http://www.sid.org>.

Next Month in *Information Display*

Projection Issue

- What's Inside That Projector
- Computer-Video Interfacing
- How to Select an FPD
- Screen Reflection
- Asia Display '98 Review

INFORMATION DISPLAY (ISSN 0362-0972) is published eleven times a year for the Society for Information Display by Palisades Institute for Research Services, Inc., 411 Lafayette Street, 2nd Floor, New York, NY 10003; Leonard H. Klein, President and CEO. EDITORIAL AND BUSINESS OFFICES: Jay Morreale, Managing Editor, Palisades Institute for Research Services, Inc., 411 Lafayette Street, 2nd Floor, New York, NY 10003; telephone 212/460-9700. Send manuscripts to the attention of the Editor, ID, Director of Sales: Michele Klein, Palisades Institute for Research Services, Inc., 411 Lafayette Street, 2nd Floor, New York, NY 10003; 212/460-9700. SID HEADQUARTERS, for correspondence on subscriptions and membership: Society for Information Display, 31 East Julian Street, San Jose, CA 95112; telephone 408/977-1013, fax -1531. SUBSCRIPTIONS: *Information Display* is distributed without charge to those qualified and to SID members as a benefit of membership (annual dues \$55.00). Subscriptions to others: U.S. & Canada: \$36.00 one year, \$5.00 single copy; elsewhere: \$72.00 one year, \$6.50 single copy. PRINTED by Sheridan Printing Company, Alpha, NJ 08865. Third-class postage paid at Easton, PA. PERMISSIONS: Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limits of the U.S. copyright law for private use of patrons, providing a fee of \$2.00 per article is paid to the Copyright Clearance Center, 21 Congress Street, Salem, MA 01970 (reference serial code 0362-0972/98/\$1.00 + \$0.00). Instructors are permitted to photocopy isolated articles for noncommercial classroom use without fee. This permission does not apply to any special reports or lists published in this magazine. For other copying, reprint or republication permission, write to Society for Information Display, 31 East Julian Street, San Jose, CA 95112. Copyright © 1998 Society for Information Display. All rights reserved.

- 2 Editorial
We Make the Box
Ken Werner
- 4 The Display Continuum
On the Third Day of Christmas ...
Aris Silzars
- 12 Fourth Annual Display of the Year Awards
For 1998, a newly commercialized display technology wins the Display of the Year Gold Award, and a new award for components and materials is added.
Ken Werner
- 18 Small Displays Have a Big Future
Depending on how we count, about 30 microdisplay vendors are seeking gold in the applications hills. Can there possibly be enough to go around?
Hiap L. Ong and Ronald P. Gale
- 24 Image Processing for Flat-Panel Displays
If FPD-based monitors are to challenge CRTs, we must have the electronics to solve the "native-format problem" – and we do.
Ernest Yeung
- 28 The Military Display Dilemma
The U.S. military can no longer use CRTs, and cannot afford to acquire LCDs – unless it substantially modifies its "corporate culture."
Kenneth E. Sola
- 34 Is the Measurement of Front-Projector Characteristics an Impossible Task?
A lot goes on between the projection lens and the eye that projector manufacturers can't control, but it is possible to make accurate front-projection-display measurements in stray-light conditions?
Paul A. Boynton and Edward F. Kelley
- 46 SID '99 Hotel Reservation Form
- 46 Index to Advertisers



We Make the Box

The legendary radio and TV newsman Edward R. Murrow once said that without high-quality programming, television was just a box with lights, and wires coming out. Well, my dear readers, we make the box. By which I mean we do applied research for it, design it, manufacture it, integrate it, market it, advertise it, promote it, sell it, and write about it. And in the early years of this era of "convergence," the same applies

to computer monitors and integral computer displays in relation to Internet and CD-ROM (and DVD-ROM) programming. We make the box.

For the most part, we do a very good job of making the box. The people in this industry - with only occasional exceptions, in my experience - approach their varied tasks with enthusiasm, industriousness, and integrity. Succeeding generations of boxes show larger, brighter, more detailed images, and the boxes themselves last longer, cost less, and consume less electrical power.

We are now embarking on a new era of television in which image quality will improve dramatically. We are making a *much* better box. But will the technology and economics of digital TV lead to higher-quality programming: programming that will educate us, enlighten us, give us entertainment that is occasionally intelligent, and provide us with the conscientious news reporting and analysis we need to be good citizens of our own countries and of the world - real news, not the "info-tainment" that tarnishes Ed Murrow's legacy.

One of the problems is that good news requires intelligent, knowledgeable, well-trained journalists; and good entertainment requires intelligent and well-trained writers, actors, directors, and producers. On the entertainment side, at least, U.S. television networks are already complaining about there not being enough talent to go around. It's not clear how better picture quality and more channels - which will further dilute the talent pool, divide the audience pie into smaller slices, and increase the competition for funding - will help this situation.

But neither is it clear that dividing an audience into enthusiastic, well-identified segments can't sometimes stimulate good programming. HBO was a big winner at the Emmy awards last September on the strength of creative original programming. The networks certainly have the resources to do this kind of programming, but they may feel such programs can not hold enough of a network's diverse audience. (They may also just lack the creativity and imagination.)

What effects high definition may have on programming is not easy to assess. Large, high-definition formats are certainly well suited to many sports events and movies. Will the existence of HDTV skew prime-time schedules more in this direction? Will we go through a period where visual spectacle will take precedence over other values - such as writing, directing, and acting? Will news departments be inspired to recreate a modern form of the old newsreel to replace static and largely interchangeable "talking heads"?

After the temporary technical problems are resolved, will digital TV accelerate or reverse the trend toward cable and digital TV at the expense of terrestrial broadcasting? Cable and satellite will no longer have an advantage in terms of picture quality, and broadcasters will be able to deliver more channels than they do now, at least at standard definition. So in some ways digital TV may level the playing field.

continued on page 23

Information DISPLAY

Editor: Kenneth I. Werner
Managing Editor: Jay Morreale
Administrative Editor: Ralph Nadell
Assistant Editor: Dian Mecca
Contributing Editors: Aris Silzars, Bryan Norris, Chuck McLaughlin, Joe Hallett, Alfred Poor
Advertising Manager: Jay Morreale
Director of Sales: Michele Klein

Regional Associate Editors

Allan Kmetz (**Americas**)
Lucent Technologies
Murray Hill, New Jersey

Shigeo Mikoshiba (**Asia**)
University of Electro-Communications
Tokyo, Japan

Alan Mosley (**Europe**)
Central Research Laboratories
Hayes, Middlesex, U.K.

Advisory Editors

Ken Compton
Clinton Electronics Corp.
Rockford, Illinois

Carl Machover
Machover Associates
White Plains, New York

Peter Pleshko
PEMM Services
Kingston, New York

Alan Sobel
Consultant
Evanston, Illinois

Webster E. Howard
FED Corp.
Hopewell Junction, New York

The opinions expressed in editorials, columns, and feature articles do not necessarily reflect the opinions of the editor or publisher of *Information Display Magazine*, nor do they necessarily reflect the position of the Society for Information Display.

Powerful New Video Generators. The Smart Choices.

STANDALONE

ASTRO VG-851/854



Dot Clock to 400 MHz

Horizontal Scan to 300KHz

Extremely easy operation from front panel or PC

Highest Available Performance

256 Levels at all Frequencies

Fully compatible with all HDTV-formats-even 1080p

Accepts Bitmap-Files


Standalone Units from **\$2950**

400 MHz for true 2K x 2K resolutions; Storage of more than 1000 Timing/Pattern Programs in Flash Memory and EEPROM; Fully PC-compatible with "Bitmap" capability; direct access to any parameter from front panel or through PC-programs. And any of the (E)EPROM you used in earlier units can still be used.

That's what we call High Performance, Flexibility and Ease of Operation!

PC-BASED

Team VG-530pc UNI VG-D300pc

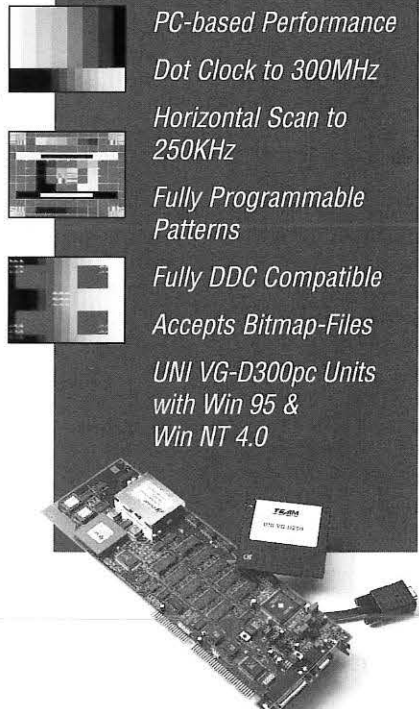

PC-based Performance

Dot Clock to 300MHz

Horizontal Scan to 250KHz

Fully Programmable Patterns

Fully DDC Compatible

Accepts Bitmap-Files

UNI VG-D300pc Units with Win 95 & Win NT 4.0

PC-Based Units from **\$2500**


300 MHz gives you ample margin if you work with Display Systems up to a 1600x1280 resolution. Its full "DDC" capability is an increasingly important asset in service and manufacturing applications.

Both PC-based units allow VESA-D.P.M.S. testing and the ability to import preset .pcx data files from other sources as "test patterns".

The user interface is DOS- and Win 95 & Win NT 4.0 respectively.

DIGITAL

ASTRO VG-826A

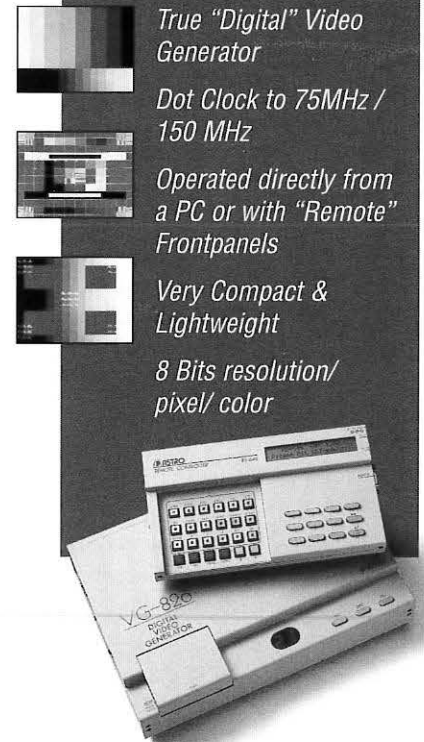

True "Digital" Video Generator

Dot Clock to 75MHz / 150 MHz

Operated directly from a PC or with "Remote" Frontpanels

Very Compact & Lightweight

8 Bits resolution/pixel/ color

Digital Units from **\$5950**

Service, repair, evaluate or engineer FPDs? The Astro VG-826A is the Digital Generator for you.

It's small and light, yet has the performance to drive any single or multiplexed Flat Panel Device with a resolution of 24 bits per pixel up to a multiplexed frequency of 150MHz.

It can be programmed/operated from a PC, the RB-646A "Remote". Frontpanel or the RB-614C Controller.

Make the *Smart Choice*... Contact Team Systems

Call us: **1-800-338-1981** Visit us: **www.team-systems.com**

TEAM
systems



On the Third Day of Christmas ...

by Aris Silzars

For Mathias and Nicole this had indeed been a joyous Christmas. They had felt the magic of Christmas Eve with the lighting of the tree, and having reached the relatively mature childhood ages of 10 and 8, they had been able to appreciate both the content and the symbolic meaning of their presents. On Christmas

Day, all the feasting and visiting with their relatives and family had made this year's Christmas celebration the best one yet. Now, a few days later, they were getting in some serious playtime with their new toys.

Nicole had already tried out her new digital camera to take photos of her stuffed bear collection. She had also photographed all her presents, made several photo-quality prints for herself, using the color printer attached to her dad's home-office computer, and transmitted some of these images via the Internet to her two best friends across town. Now she was getting ready to send an e-mail with pictures of two of her newest stuffed bears to Grandma so that her grandmother could see how the Christmas presents she had sent looked sitting next to the other bears in Nicole's collection.

Mathias was also experimenting with one of his Christmas presents, a game-compatible digital camera. (As with parents everywhere, Mathias's and Nicole's considered keeping a good balance of presents between siblings an important goal.) Mathias was at the moment acquiring images of his surroundings so that he could personalize the software of a detective mystery puzzle on his game computer. Convincing Nicole that she should pose for him, so that he could make her one of the characters in his computer story, turned out to be the toughest challenge. However, she finally relented after he agreed to help her with her next school homework assignment.

Their parents had already sent the images of the family's Christmas to all their friends and relatives and had conversely received pictorial Christmas greetings via e-mail from most of them in return. It was great how quickly this new tradition had caught on and how the earlier tradition of sending store-bought Christmas greeting cards by mail had died out - equally quickly. After all, there was so much more interesting content in a just-captured electronic image of the family's celebration than in a pre-printed card with nothing more than a signature or, maybe at most, a copy of a letter about how great all the kids have done over the past year and/or a posed photo of the children from some earlier occasion.

Doesn't this sound like a storybook-perfect description of a future Christmas celebration some years from now? Perhaps it does, but it's not. Except for a few minor details, we are not describing future Christmases; we're talking about this Christmas, the Christmas of 1998. And the digital cameras for the kids? Rich kids only? Well, Nintendo has a digital camera on the market as an add-on to its Game Boy toy for \$49.95 and pre-Christmas season sales have already exceeded 800,000 in the U.S. and Japan. And the camera for Nicole? Mattel has introduced one to go along with its Barbie toys for about \$69. Both are made with CMOS sensors, which are less expensive than CCDs.

Is the day of all-electronic digital photography really upon us? Before we get too carried away with this technology-driven-lifestyle scenario, consider this letter, which came to me in response to an earlier column.

continued on page 40

SID Executive Committee

President: A. C. Lowe
President Elect: A. Silzars
Regional VP, Americas: R. Donofrio
Regional VP, Asia: C. Lee
Regional VP, Europe: B. Needham
Treasurer: A. R. Kmetz
Secretary: R. L. Wisniewski
Past President: W. E. Howard

Directors

Bay Area: H. Sherman
Beijing: S. Ding
Belarus: A. Smirnov
Canada: T. Schmidt
Delaware Valley: J. W. Parker III
France: F. Maurice
Greater Dayton: R. Holmes
Hong Kong: C. C. Chang
Japan: A. Iwamoto
Korea: M. Oh
Los Angeles: P. Baron
Metropolitan Detroit: V. Cannella
Mid-Atlantic: D. Ketchum
Mid-Europe: R. Mauch
Minneapolis/St. Paul: V. Born
New England: W. Hamilton
Pacific Northwest: J. Rupp
Russia: M. Tomilin
San Diego: R. Ruff
Southwest: R. Seery
Taipei: F. C. Luo
Texas: Z. Yaniv
U.K. & Ireland: A. Mosley
Ukraine: V. Nazarenko

Committee Chairs

Academic: C. J. Summers
Archives/Historian: R. C. Knepper
Bylaws: C. Infante
Chapter Formation: H. Uchiike
Convention: P. M. Heyman
Definitions & Standards: R. Miller
Honors & Awards: A. I. Lakatos
Long-Range Planning: J.-N. Perbet
Membership: J. W. Parker
Nominations: W. E. Howard
Office Liaison: D. Pinsky
Publications: A. Silzars
Communications: J. Rupp

Chapter Chairs

Bay Area: N. Balram
Beijing: H. C. Hu
Belarus: E. Kaloshkin
Canada: A. Kitai
Delaware Valley: L. Bryner
France: H. Brettel
Greater Dayton: J. Byrd
Hong Kong: H. S. Kwok
Japan: M. Maeda
Korea: M. Oh
Los Angeles: M. Kesselman
Metropolitan Detroit: J. Erskine
Mid-Atlantic: M. Anandan
Mid-Europe: D. Theis
Minneapolis/St. Paul: H. Holec
New England: S. Atwood
Pacific Northwest: T. Yuzuriha
Russia: S. Darevsky
San Diego: R. Ditzik
Southwest: J. O'Donnell
Taipei: H.-P. D. Shieh
Texas: R. Fink
U.K. & Ireland: C. Williams
Ukraine: V. Sorokin

Office Administration

Executive Director: Dee Dumont
Executive Assistant: Jenny Needham

Society for Information Display

31 East Julian Street
San Jose, CA 95112
408/977-1013, fax -1531
e-mail: office@sid.org
http://www.sid.org



BM-SERIES ILLUMINANCE COLORIMETERS

SEE COLOR AND LUMINANCE IN A WHOLE NEW LIGHT...

Work smarter, not harder.

The Topcon BM-5A/BM-7 are fully integrated photometer/colorimeters that automatically read Luminance and Chromaticity coordinates, Color Temperature, or CIELAB and CIELUV values, in a single measurement. Manual operation of filter wheels, recording data and computing Chromaticity values are things of the past. The fully automatic BM-5A and BM-7 make laboratory work more accurate and efficient. All information is instantly available on a backlit rear panel LCD.

GP-IB or RS-232C interface options allow data to be easily exported to a personal computer. With easy selection of field aperture sizes, advanced design, and available accessory options, the BM-5A/BM-7 are ideal photometric tools capable of handling many diverse industry applications.

- Complete evaluation of color displays
- Reflected light measurements
- Automotive/ Avionics panels
- FPD and LCD testing
- SAE chromaticity measurements with optional software and hardware
- Production testing where high volume data recording is necessary
- Outdoor and remote operation with battery pack

Topcon has been a world-wide leader in electro-optical instrumentation standards for over 65 years. And we're committed to providing you with superior instruments, built to the highest standard of quality.

Call today at **1-800-223-1130**
and make Topcon your partner in quality
photometric instrument requirements.




Topcon America Corporation
37 W. Century Rd., Paramus, NJ 07652
Tel. 201-261-9450 • Fax 201-262-1504
Visit us at: <http://www.topcon.com>




Westar's LCDcube™ Drive Electronics

solves the integration challenges in developing AMLCD-based displays

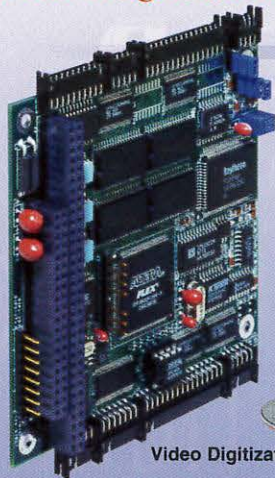

Video Digitization

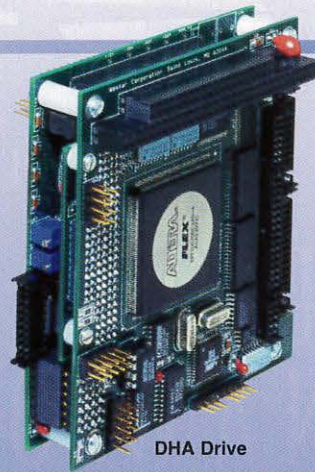

DHA Drive

- ✓ Accepts standard video inputs and drives avionics AMLCDs
- ✓ Reduce development time and cost with standard off-the-shelf solution
- ✓ Shrink overall display outline dimensions with the smallest possible form factor: PC/104
- ✓ Apply to any CRT retrofit application without redesign



Westar is a leading supplier of modular drive electronics and flat panel display test systems to the aerospace, computer, and FPD product industries. Contact us in the US at (314)298-8748, ext.286, or visit our website at www.westar.com/id.


Copyright ©1998, Westar Corporation Trademarks are property of their respective owners.

Circle no. 4

Flat Panel Monitor **ARMS™**

Call: 1.800.888.8458

Ergonomically position your flat panel monitors, laptops and keyboards wherever you need them—with Ergotron's **Adjustable Rotating Mounting Solutions**

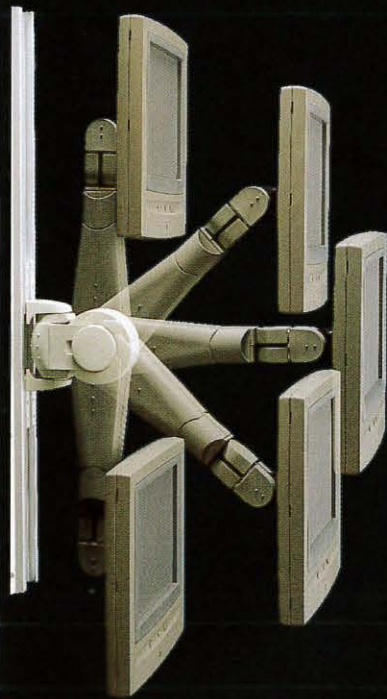

Mobile Solutions



Wall Mount Solutions



Custom Mount Solutions




Laptop Mounting Solutions



ERGOTRON®

1.800.888.8458 <http://www.ergotron.com>

Circle no. 5

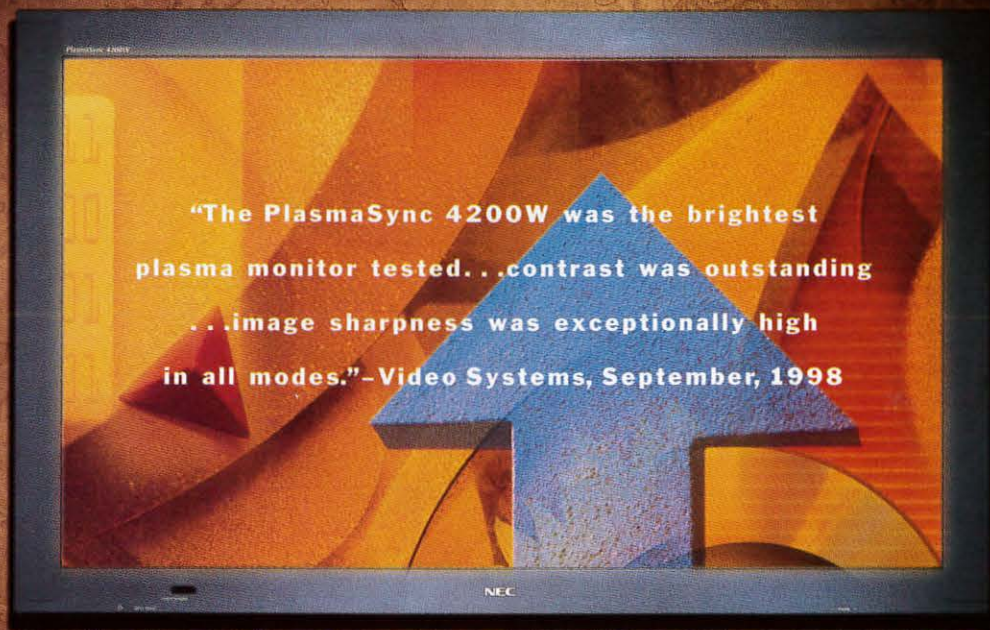

"The PlasmaSync 4200W was the brightest plasma monitor tested...contrast was outstanding...image sharpness was exceptionally high in all modes."—Video Systems, September, 1998

With praise like this, you'd be glowing too.
Introducing the PlasmaSync 4200W.



Boardroom visitors, airport travelers, industry experts—there's no telling who the new PlasmaSync™ 4200W will impress next. Thanks to our unique Capsulated Color Filter™ technology, the 42-inch, 16:9 screen produces vibrant, realistic colors, fine detail and excellent contrast. The PlasmaSync 4200W gives you the flexibility you need, too—it's equally at home with computer, conventional video and HD video sources. Finally, we've fit all this performance in a cabinet that's just 3.5-inches deep—40% thinner than its main competitor. Call today to demo the PlasmaSync 4200W, or its equally impressive sibling, the 33-inch PlasmaSync 3300. Because while the PlasmaSync 4200W may look good in print, you haven't seen anything until you've experienced it in living color.

NEC

Take the Demo Showdown. For a free product demonstration, call (800) 449-0967.


NECTechnologies

To learn more, visit www.nectech.com. Or call (800) NEC-INFO. Expect more. Experience more.

Circle no. 6

From the day we're born,
we go into the world
looking for what we
want with our eyes.



Almost nothing has a bigger impact on product preference than the visual performance of a display. OCLI's image enhancement technology delivers **vivid colors, high contrast** and **crisp resolution** on direct view and projection displays. The difference is an immediately visible improvement that will win over even the most discriminating customers, the moment they see it.

Contact us for more information: www.ocli.com

USA (707) 545-6440 (888) 312-0848 EUROPE (49) 6162-93030 JAPAN (81) 3-3225-8974

Circle no. 7



SOLOMON
SOLOMON Group

LCM
Division

**HIGH QUALITY
LCD Modules**



ISO 9001

Standard and custom designs

**SOLOMON Technology Corp.
LCM Division**

42-1 Chang Tai Str. Hsiao Kang District
TW-812 Kaohsiung
Taiwan, R.O.C.
Phone: +886-7-872-1787
Fax: +885-7-872-1786
E-mail: j1@solomon.com.tw

US Branch Office:

SOLOMON Technology (USA) Corp.
21038 Commerce Pointe Dr.
Walnut, CA 91789
USA
Phone: (909)-468-3733 Ext. 3038 & 3039
Fax: (909)-869-6258
E-mail: jb4lcm@ix.netcom.com

Introducing the world's most advanced FED technology in a high-volume cluster tool.

The new Temescal® FCE-7000 from BOC Coating Technology is very big news: In fact, if you're looking for high-volume FED flat panel deposition with lowest cost of ownership and incredible flexibility, it just doesn't get much better than this...

To start with, there's BOC's world-class e-beam technology – which gives you the best uniformity, highest rates, longest life and largest source inventory, to cite just a few of its merits.

Then, this is a cluster tool. So you can deposit a single film or a


whole stack, in just about any way you'd like.

Plus, your panel size choices are virtually unlimited. The tool now handles up to 600mm x 720mm, which happens to be the largest in the world. But BOC can also configure it for even larger sizes upon request.

Highest throughput. Lowest cost of ownership.

The FCE-7000 is a proven production tool that generates throughput speeds of from 10 to 60 panels per hour – and even up to 70 and 75 on certain processes. And when you combine that kind of throughput with high production quality levels, you get a very attractive return on your investment.


Designed for production, BOC's flexible cluster configuration lets you deposit a single film or an entire stack.

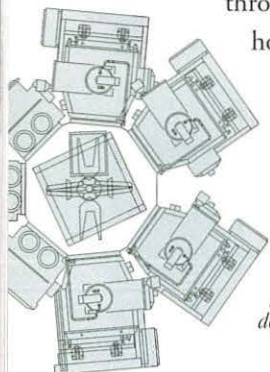

And this system also reduces downtime and requires less maintenance.

Plus, it provides more advanced automation and higher materials utilization. So you can see how it achieves the lowest cost of ownership of any flat panel deposition system in the industry.

BOC's FCE-7000, the world's largest FED production tool, can process panels up to 600mm x 720mm.

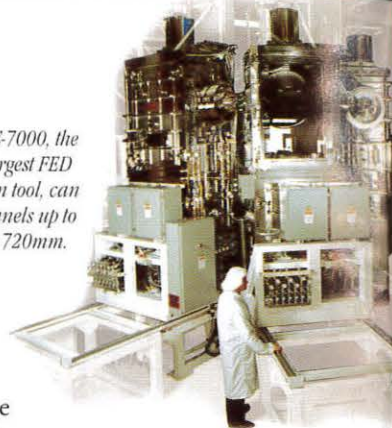

A full spectrum of solutions.

BOC has been producing coating systems for more than 35 years now.

So they can provide not only high-throughput production systems, but also prototype R&D and intermediate systems, as well.

They can also provide you with an unmatched repertoire of process and system knowledge and managed engineering expertise.

So, even if your process is not yet fully developed, you can depend on BOC to help you answer the questions, negotiate the risks and get where you want to go.

Bottom line, it means smarter solutions – from the big performance guys, BOC. Call them and see for yourself...


Temescal, a part of BOC Coating Technology, 2700 Maxwell Way, Fairfield, CA 94585. (707) 423-2100. Fax: (707) 425-6071.

 **BOC**
COATING
TECHNOLOGY

Check what you need in your display analysis system:

- ✓ flat panel tests
- ✓ CRT tests
- ✓ easy upgrades (hardware and software)
- ✓ standard for ISO, NIDL, and VESA testing
- ✓ optimized for fast, accurate, and automatic testing with many packaged test suites

If you checked all of the above,
you have chosen the Microvision SS200 Family
of Display Analysis Systems

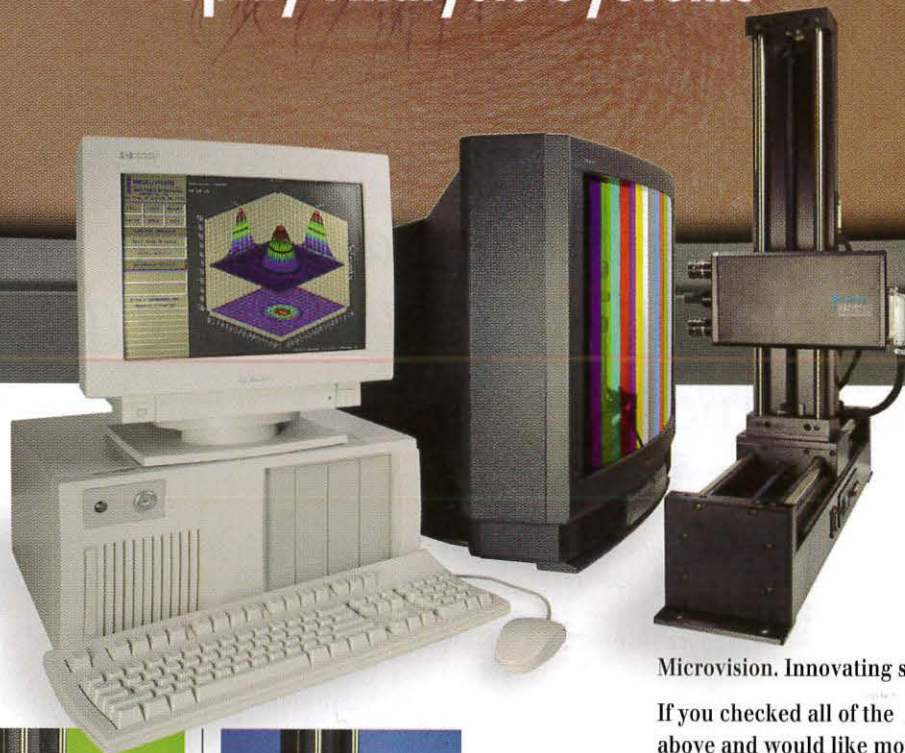

With the SS200 family,
you can precisely,
automatically, and
completely measure
display performance—
and that includes
flat panels.




SS200

Complete turnkey system with computer, 6-axis positioner, monitor, software, and SS200 camera system. Automatically performs spatial and luminance measurements.



SS210

You can easily field upgrade to the more powerful SS210 package, which provides all SS200 functions, plus an integrated spectrometer for spectral analysis and color measurements. Includes response time measurement capability.



SS220

For flat panel testing, a field upgrade to the SS220 is easy. The SS220 provides spectrometer-based off-axis measurement, color analysis, color shift and luminance testing. Coupled with the SS210, this is the most comprehensive test system ever offered—at a fraction of the cost of individual test instruments. All tests are performed at NIST-traceable accuracy.

Microvision. Innovating since 1985.

If you checked all of the
above and would like more information,
call Microvision at (800) 951-5188.

MICROVISION

Dedicated to the Needs of the Display Industry

550 High St., Suite 108 / Auburn, CA 95603
Tel: (530) 888-8344 / Fax: (530) 888-8349
Toll Free: 1 (800) 931-3188
Email: microvsn.com
Web site: <http://www.microvsn.com>

International Reps:
Japan - ARGO CORP., 06 359 3566
Taiwan - SUPERLINK TECH., 02 705 7090
Korea - B & P INT'L, 02 546 1457

Fourth Annual Display of the Year Awards

For 1998, a newly commercialized display technology wins the Display of the Year Gold Award, and a new award for components and materials is added.

by Ken Werner

WHEN the members of the SID/Information Display Display of the Year Awards Committee (DYAC) met near Anaheim, California, during SID '98, they concluded a year-long deliberation by adding a third award honoring developments in components and materials to the two existing awards for displays and display products. The DYAC also retired the concept of giving "awards" and "honorable mentions." Starting this year, a gold and a silver award will be granted in each of the three categories.

What has not changed is the DYAC's special character and the painstaking nature of its deliberations. The committee is not only fully international (see text box, 1998 Display of the Year Awards Committee), but consists of both distinguished members of the technical display community and distinguished technical journalists who cover displays. This combination ensures that the DYAC's deliberations are carried out with both technical sophistication and breadth of view.

All of the displays and products considered for the awards were nominated either by the members of the DYAC or by interested parties who submitted their nominations to the DYAC secretariat. The secretariat distributed the names of all the nominees to the committee members, who then voted for the winners. The DYAC bylaws require the committee members to consider many factors when they vote, including technical innovation, commercial significance, and likely social impact.

Ken Werner is the editor of Information Display. The opinions expressed in this article are not necessarily those of the Publisher of Information Display Magazine or of the Society for Information Display.

To be eligible for this year's awards, displays, products, components, and materials must have become commercially available - either to OEMs or end users - between July 1, 1997, and June 30, 1998.

This year's winners were developed by companies from three continents, and the voting for our new Display Material or Component Award of the Year resulted in an absolute tie. As a result, the DYAC is awarding two gold awards and no silver award in this category for 1998.

DISPLAY OF THE YEAR AWARD

Gold Award: Tohoku Pioneer's Organic Electroluminescent Display

Since an electroluminescent effect with an organic phosphor was first demonstrated almost a dozen years ago, there has been a great deal of interest and research. But even 2 years ago, the difficulties of processing organic light-emitting-diode (OLED) materials and giving the resulting devices reliability and long life seemed formidable. Then, in 1996, Tohoku Pioneer demonstrated a green 256×64 dot-matrix prototype OLED with a luminance of 100 cd/m^2 and an estimated life of 10,000 hours, and later described the device at SID '97.

Now, Tohoku and Pioneer are producing a production version of the device and are incorporating it in Pioneer's GD-F1 FM Multiplex Automotive Receiver for receiving text messages from the VISC traffic-information system. The OLED's high luminance and contrast make the messages readable in most daylight conditions.

Full-color devices are on the way from both Tohoku and Idemitsu, but for now, this green device is the world's first and only commercially produced OLED. The DYAC wishes to acknowledge Tohoku's and Pioneer's solution of the many technological problems that stood between a promising electro-optical material and practical display devices.



DISPLAY OF THE YEAR AWARD

Silver Award: Fujitsu's 15-in. Multi-Domain Vertical Alignment (MVA) TFT-LCD

Makers of active-matrix liquid-crystal displays (AMLCDs) based on conventional twisted-nematic (TN) technology have struggled for years to attain video-rate switching speeds and wide viewing angles. New liquid-crystal (LC) modes have provided very wide viewing angles at the expense of response time, and wide viewing angles are now being combined with reasonable response times through the use of compensating films.

What Fujitsu has accomplished with its FLC38XGC6V/6V-01 module is to combine a novel LC mode with a multi-domain structure for a combination of wide angle (160° both horizontally and vertically) and very fast switching time (25 ms, on + off) based on the structure of the display itself, *i.e.*, without external compensation. In addition, the multiple domains are created without rubbing.

Fujitsu has exhibited a 21.3-in. demonstration unit in Japan, which was shown displaying a motion picture, suggesting the possibility of a wall-hanging TV. But the excitement now is the 15-in. MVA-TFT module, which is being delivered at a rate of several thousand a month, according to Fujitsu. With a luminance of 200 cd/m^2 , a contrast ratio of 300:1, a four-tube backlight, and a choice of an LVDS or CMOS digital interface, this LCD would seem to make a particularly attractive CRT replacement for monitors.



DISPLAY PRODUCT OF THE YEAR AWARD

Gold Award: Hughes-JVC's D-ILA™ Digital Graphics G1000 Projector

Hughes-JVC has incorporated its recently developed Direct-Drive Image Light Amplifier (D-ILA™) in the first projector to use this highly effective reflective light-valve technology. Unlike the CRT-addressed ILA® devices developed previously by Hughes-JVC, the new LC-on-CMOS device is digitally addressed. At 0.9 in. on the diagonal, it is much smaller and lighter than the CRT-addressed devices.

The new projector uses three of the D-ILA™ devices working through a single lens to produce a maximum screen resolution of 1365 × 1024 pixels with a luminous flux of 1000 ANSI lumens and a contrast ratio of more than 250:1. The projector handles a full SXGA image without scaling or loss of quality, scales smoothly for lower screen resolutions, and can handle 1000 TV lines for full HDTV compatibility. With a weight of 28.6 lbs., the projector is intended to be transportable and to offer easy set-up.

The DYAC acknowledges a quarter century of dedicated light-valve development at Hughes and Hughes-JVC, culminating in the current combination of technical innovation and excellent product performance.




DISPLAY PRODUCT OF THE YEAR AWARD

Silver Award: Alcatel's One-Touch Com™

In its One-Touch Com™, Alcatel uses a 40 × 80-mm backlit LCD to combine the functions of a GSM digital cellular phone, a personal organizer, a wireless Internet e-mail communicator using SMTP and POP3 protocols, a short-message (SMS) communicator, and PC companion. A specially formatted SMS message sent to the One-Touch Com™ can update the calendar automatically. PC synchronization can be done *via* the PC's serial port or wirelessly through the integrated IrDA infrared port.

The key to getting all of this into a compact 240-gram package is the relatively large display, which can present a GUI, interactive data screens appropriate to the various functions, a soft keypad for dialing phone numbers, and a soft alphanumeric keyboard that is actuated with a stylus. To make creating messages easier, a variety of pre-written messages can be called up and modified.

Alcatel has created a sophisticated multi-functional product that could open Internet e-mail to a wide range of users, without any need for computer equipment or expertise. The product is based on a highly intelligent design that is enabled by display technology and a thoughtful user interface. The Display Product of the Year Award was created to honor this kind of achievement.

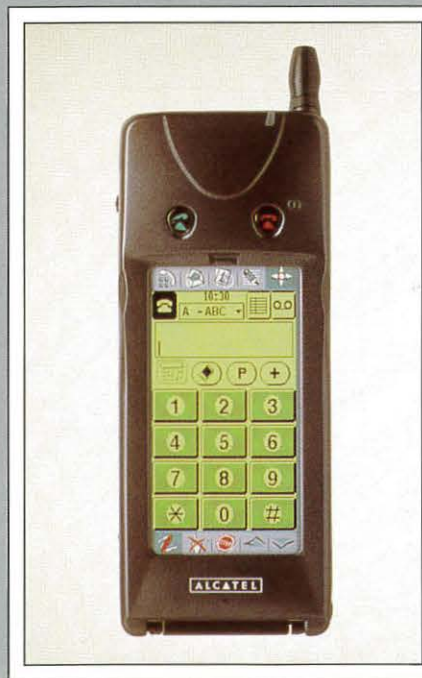

DISPLAY MATERIAL OR COMPONENT OF THE YEAR AWARD

***Gold Award: Silicon Image's PanelLink™**


In their quest to displace CRTs from the desktop, makers of flat-panel monitors (FPMs) have been impeded by the need to interface their inherently digital products to the analog output of the typical graphics controller cards in personal computers, or to supply a proprietary digital controller card. The former solution adds substantial cost and compromises image quality; the latter solution also adds cost, as well as requiring the user to open the box and install the special card – the antithesis of “plug and display.”

With its invention of PanelLink™, the first implementation of transition-minimized differential signaling (TMDS), Silicon Image has set the stage for substantially less-expensive digital FPMs and universal controller cards that will economically support both TMDS and traditional analog monitors.

PanelLink™ implements TMDS with a transmitter-receiver chipset. The receiver chip (SiI 151) resides in the monitor. The transmitter chip (SiI 150) resides on either a single-purpose TMDS or universal graphics controller card. The two chips are connected with a twisted-pair cable up to 5 m long.

PanelLink™ is enjoying strong industry support. VESA's “Plug and Display” standard was largely built around PanelLink™, and the technology is being implemented by Compaq, IBM, ATI, Matrox, STB, LG Electronics, Princeton Graphics, Samsung, Viewsonic, Mag Innovision, Siemens-Nixdorf, Toshiba, and others.

Silicon Image has developed a technology and commercialized a display component that is helping to move the display industry, its OEM customers, and display end users into an increasingly digital flat-panel future.

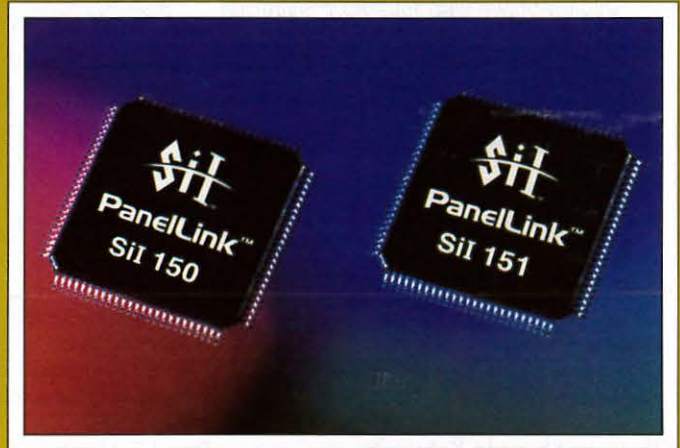


DISPLAY MATERIAL OR COMPONENT OF THE YEAR AWARD

***Gold Award: Dai Nippon's Ultra Contrast Screen**

Conventional double-lenticular “black stripe” screens, used with Fresnel lenses in television and other rear-projection applications, are very effective in providing high screen gain with low reflection of ambient light for high contrast. But the pixel pitch of these screens cannot be reduced much below 0.3 mm, which makes them unsuitable for SXGA and HDTV applications.

At these higher screen resolutions, it is possible to use single-lenticular screens, but the lack of black stripes on these screens means reflections are higher and contrast lower. The addition of a contrast-enhancement filter would indeed provide increased contrast, but at the cost of screen luminance – which is in short supply in many rear-projection applications. So, as TV manufacturers moved into the HDTV era, they faced a serious dilemma.

Dai Nippon Printing Company has helped resolve this dilemma with its ultra contrast screen (UCS), a lenticular screen with 0.14-mm pitch that incorporates an internal ambient-light absorption system (ALAS) that provides improved contrast without an external black matrix or contrast-enhancement layer. As the first and only high-gain enhanced-contrast solution to date for single-light-source (LCD, DMD, etc.) rear projectors, UCS is being widely accepted.

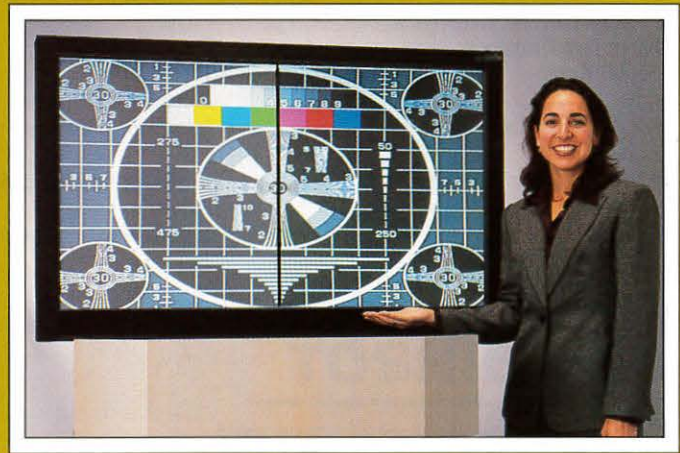

*Because of a tie, there are two gold awards, and no silver award, in this category for 1998.

ORIGIN OF THE DISPLAY OF THE YEAR AWARDS

The idea of awards for the best displays of the year was first suggested by Professor Shunsuke Kobayashi to *Information Display* editor Ken Werner in Monterey, California, in October 1994. Following discussions with Aris Silzars, Kathy Middo, and members of the Board of Directors of the Society for Information Display, the Display of the Year Awards Committee (DYAC) was formally constituted in January 1995 in Santa Clara, California, with Professor Kobayashi as Chair. To ensure a broad perspective as well as in-depth technical understanding, it was agreed that the committee should include technical journalists as well as distinguished display professionals - a strategy that has proved very successful.

1998 DISPLAY OF THE YEAR AWARDS COMMITTEE

Mr. Jean-Noel Perbet, Chair
Sextant Avionique
Commercial Air Transport Avionics
Le Haillan, France

Professor Shunsuke Kobayashi,
Founding Chair
Professor of Electronic Engineering
Science University of Tokyo in Yamaguchi
Onoda, Yamaguchi, Japan

Ms. Cheryl Ajluni
Western Editor
Electronic Design
San Jose, California, USA

Dr. Hsing-Yao (Jimmy) Chen
Chunghwa Picture Tubes, Ltd.
Taoyuan, Taiwan

Professor Shou-Qian Ding
Department of Electron Science
Nankai University
Tianjin, China

Professor Jin Jang
Kung Hee University
Seoul, Korea

Ms. Florence Ladouce
Editor
Electronique Internationale
Paris, France

Mr. David Lieberman
Northeast Editor
Electronic Engineering Times
Townsend, Massachusetts, USA

David E. Mentley
Vice President
Stanford Resources
San Jose, California, USA

Professor Shigeo Mikoshiba
Department of Electronic Engineering
The University of Electro-Communications
Tokyo, Japan

Dr. Alan Mosley
Technical Director
MicroPix Technologies
Hayes, Middlesex, U.K.

Mr. Alfred Poor
Contributing Editor
PC Magazine
Perkasie, Pennsylvania, USA

Dr. Aris Silzars
President
Northlight Displays
Issaquah, Washington, USA

Professor Chuji Suzuki
Advisor
International Center for Materials Research
Nara, Japan

Mr. Chizuka Tani
NEC Corporation
Kanagawa, Japan

Mr. Kenneth I. Werner
Editor
Information Display Magazine
Norwalk, Connecticut, USA

For further information, please communicate with the Committee Secretariat:

Nutmeg Consultants
Att: Dian Mecca
2 Shady Brook Lane
Norwalk, CT, 06854
Phone: 203/853-7069
Fax: 203/855-9769
e-mail: kwerner@home.com



When you're making some of the world's best monitors, you want to start with some of the world's best display tubes. So it's no wonder that NEC Technologies chooses Toshiba Microfilter™ CRTs for their award-winning MultiSync® E900+™ monitors. Compared to conventional tubes, Microfilter technology significantly enhances contrast, brightness and color fidelity. The difference can be seen in clearer, more focused pictures. Noticeably superior monitors. And a better image for everyone involved. To find out more, please visit our web site, or call **1-800-879-4963**.

microfilter™ CRT

“I can see Microfilter’s difference in the specs. Our customers can see it on the screen. From any perspective, the choice is easy.”

Richard Atanus
Director of Product Development
NEC Technologies Personal Display Division

Toshiba CRT Advantages

30% increase in brightness and contrast



10% improvement in brightness uniformity




25% decrease in power consumption



Less wear on components



Rectangular Cone (RAC) System

 To see for yourself, visit our web site and register for a live side-by-side comparison.

microfilter

microfilter.toshiba.com

In Touch with Tomorrow
TOSHIBA

TOSHIBA AMERICA ELECTRONIC COMPONENTS, INC.

ISO9001 CERTIFIED ©1998 Toshiba America Electronic Components, Inc. Microfilter is a trademark of Toshiba Corporation. MultiSync is a registered trademark and E900+ is a trademark of NEC Technologies, Inc. ETD-98-113

Circle no. 11

Small Displays Have a Big Future

Depending on how we count, about 30 microdisplay vendors are seeking gold in the application hills. Can there possibly be enough to go around?

by Hiap L. Ong and Ronald P. Gale

WHEN WE THINK of liquid-crystal displays (LCDs), we tend to envision a direct-view panel that is 10–13 in. on the diagonal, such as those used in portable computers or desktop monitors. Tiny panels the size of a thumbnail are poised to play increasingly important roles in computer, communications, and entertainment applications.

What Are Microdisplays?

The proliferation of different microdisplay technologies in recent years has made it difficult to define the category with precision, but in general these displays are small in physical size with high information content. Kopin Corporation's CyberDisplay 320C is a good example, with a 0.24-in. diagonal measurement and a 320 × 240 resolution (Fig. 1). The unique and common feature of microdisplays is that the pixel size is small, ranging from roughly a 50- μ m pitch down to below 10 μ m, which corresponds to pixel densities from 500 to 2500 lines per inch (lpi). By comparison, a typical direct-view LCD notebook panel has a 0.28-mm pixel pitch – which is 280 μ m and about 10 times larger than microdisplays.

Hiap L. Ong is Chief LCD Technologist, Vice President, and General Manager of Kopin Corporation's Asia Division, Hsinchu, Taiwan; telephone +886-35-772-700 x1350, fax +886-35-777-941, e-mail: Hiap_Ong@kopin.com. Ronald P. Gale is Chief Technology Officer and Vice President of Kopin Corp., 695 Myles Standish Blvd., Taunton, MA 02780; telephone 508/824-6696, fax 508/822-1381, e-mail: Ron_Gale@kopin.com.


The tiny pixels of a microdisplay cannot be adequately resolved with the naked eye, and therefore require an optical magnification system to enlarge the image. There are two main approaches used to magnify the image: projection and virtual images (Fig. 2).

Projection systems enlarge the microdisplay image to be viewed on a large screen, typically in 20–100-in.-diagonal sizes. The display panel used is normally between 0.7 and about 3 in. on the diagonal; larger displays are easier to magnify and generally make more



Fig. 1: The CyberDisplay 320C microdisplay from Kopin Corp. has an active display area that is only 0.24 in. on the diagonal, with 320 × 240 full-color resolution.

Kopin Corp.

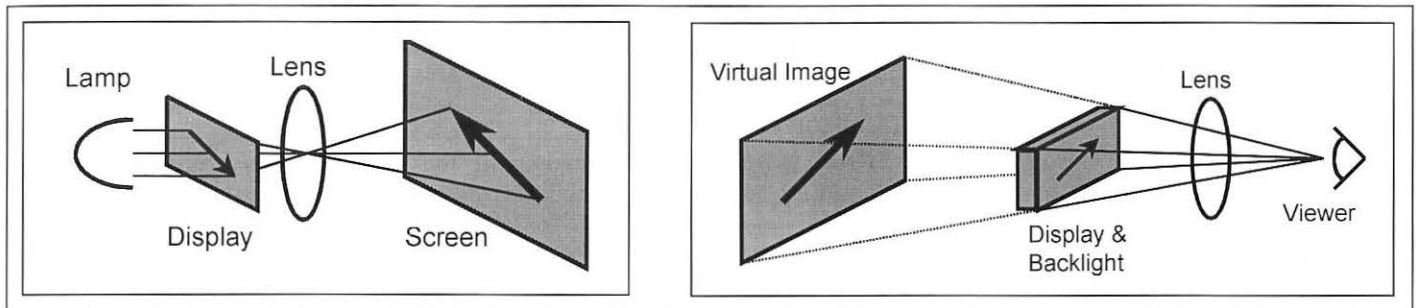

Kopin Corp.

Fig. 2: Microdisplay panels can be used either for projection displays (left) or virtual displays (right).

efficient systems, but also make for bulkier systems.

Virtual images are obtained by simply magnifying the microdisplay and having the user look directly into the optical system. The apparent image is a virtual image with an image size from 3 to 20 in. on the diagonal, depending on microdisplay size and optical-system magnification. The display sizes used in this application generally range from 0.2 to 1.0 in. on the diagonal. Typical applications

for virtual-image displays require compact configurations, so most are based on a single panel.

Applications for microdisplays require high-resolution images, which in turn require high pixel densities. Data-projector resolutions range from 640 columns \times 480 rows (VGA resolution) to 1600 \times 1200 (UXGA resolution). Virtual-image displays tend to be more modest at this point, ranging from 320 \times 240 (quarter VGA) to 800 \times 600

(SVGA), although panels up to 1280 \times 1024 (SXGA) are under development.

While there may be some overlap in the applications of specific microdisplays, most of the designs can be divided into projection and virtual-display applications, based on their size (Table 1). These two groups of microdisplays tend to be different in terms of resolution, cost, and intended application.

Microdisplay Technology

Most microdisplays are either transmissive or reflective, requiring a separate light source which is then modulated by the display. These displays are usually liquid-crystal (LC) based, although other technologies such as micro-mirrors or micro-mechanical diffraction are used. Individual pixels are typically controlled *via* an active matrix of transistors, implemented in either single-crystal or polycrystalline silicon, or in amorphous silicon. The high pixel density requires some level of drive-circuit integration on the display, and these drive technologies are implemented in the same process as the active matrix.

Microdisplays used for virtual-image applications may also be emissive, using electroluminescence (EL), organic EL, or field-emission technologies. These displays may also use an active matrix for pixel control. Most of these devices must be used in virtual-image applications because the brightness levels are insufficient for large-area projection.

Polysilicon (poly-Si) active-matrix LCD (AMLCD) panels are presently the main technology for projection displays, whereas single-crystal complementary metal-oxide semiconductor (CMOS) silicon AMLCDs are currently the main technology for the virtual displays. Single-crystal-silicon designs offer a few major advantages over the more traditional amorphous-Si (a-Si) and poly-Si active matrices.

Table 1: Two Roads for Microdisplays

Parameters (Typical values)	Projection Displays	Virtual Displays
Image type	Real image on screen	Virtual image
Image size	20-100-in. diagonals	3-20-in. diagonals
Display panel sizes	0.7-3-in. diagonals	0.2-1-in. diagonals
Resolution	VGA, SVGA, XGA, SXGA, UXGA	quarter-VGA, VGA, SVGA
Panel cost	\$300-\$2000	\$30-\$1000
Major vendors	20	30
Sample major applications	Projectors	Digital cameras, mobile phones

Table 2A: Microdisplay Vendors Using Polysilicon AMLCDs

Company	Location	Control	LC Mode	Color	Applications
Hitachi	Tokyo, Japan	High temp poly-Si	TN transmissive	3 panels	Projector Virtual display
Sanyo	Tokyo, Japan	Low temp poly-Si	TN transmissive	Diffraction	Projector Virtual display
Sarif	Vancouver, WA	High temp poly-Si	TN transmissive	3 panels	Projector Virtual display
Seiko-Epson	Tokyo, Japan	High temp poly-Si	TN transmissive	3 panels	Projector Virtual display
Sony	Tokyo, Japan	High temp poly-Si	TN transmissive	3 panels	Projector Virtual display

microdisplays

First, single-crystal silicon can be used to fabricate high-quality integrated circuits (ICs) - including scanners, clocks, memory, and logic circuits - right on the display panels themselves. Therefore, the single-crystal-Si circuit can be fabricated in an IC foundry with existing equipment and processes. Single-crystal Si also yields a higher-quality pixel

transistor because of much higher mobility in single-crystal Si than the poly-Si and a-Si devices. As a result, pixels can be smaller, which in turn leads to better image quality, smaller devices, and lower overall costs for these devices. The fact that more circuitry is integrated on the display periphery also leads to higher chip reliability.

All but one of the single-crystal-silicon-based displays are reflective; the display circuitry and active matrices are processed on an opaque silicon wafer. The exception is Kopin Corporation's CyberDisplay, which is transmissive.

The CyberDisplay uses a proprietary process to transfer the single-crystal circuit from the silicon wafer to a transparent glass substrate. The circuit operation remains unchanged, but, optically, light can pass through the display. This feature decouples the backlight from the viewing optics, making it possible to design a much simpler optical system than would be required for a reflective display.

Table 2B: Microdisplay Vendors Using CMOS-Based AMLCDs

Company	Location	Control	LC Mode	Color	Applications
Colorado Microdisplay	Boulder, CO	CMOS Si	NLC reflective	3 panels, Sequential	Projector Virtual display
Displaytech	Longmont, CO	CMOS Si	FLC reflective	3 panels, Sequential	Projector Virtual display
GEC	Chelmsford, UK	CMOS Si	FLC reflective	3 panels	Projector Virtual display
IBM	Yorktown Heights, NY	CMOS Si	TN reflective	3 panels	Projector Virtual display
Kopin	Taunton, MA	CMOS Si	TN transmissive	Mono, Color sequential	Virtual display
Microdisplay	San Pablo, CA	CMOS Si	TN reflective	Mono, Color sequential	Projector Virtual display
Micropix	Dunfermline, Scotland	CMOS Si, Poly-Si	FLC, TN	3 panels	Projector Virtual display
Mitsubishi	Kumamoto, Japan	CMOS Si	TN reflective	3 panels	Projector Virtual display
National Semiconductor	Santa Clara, CA	CMOS Si	PDLC reflective	3 panels	Projector Virtual display
Pioneer	Saitama, Japan	CMOS Si	TN reflective	Mono, 3 panels	Projector
Raychem	Menlo Park, CA	CMOS Si	PDLC reflective	3 panels	Projector Virtual display
Siliscap	Palo Alto, CA	CMOS Si	TN reflective	Color Sequential	Virtual display
Spatialight/HDTV	Novato, CA	CMOS Si	TN reflective	3 panels	Projector Virtual display
S-Vision	Santa Clara, CA Twinsburg, OH	CMOS Si	TN reflective	3 panels	Projector Monitor
Thomson/Sarnoff	Princeton, NJ	a-Si	TN transmissive	3 panels	Projector Virtual display
Three-Five Systems	Tempe, AZ	CMOS Si	TN reflective	Color Sequential	Projector Virtual display
Varitronix	Kwun Tong, Hong Kong	CMOS Si	TN reflective	Color Sequential	Projector Virtual display

Note: FLC, ferroelectric LC; NLC, nematic LC; PDLC, polymer-dispersed LC.

Creating Color

When it comes to creating color images in a display panel, system designers can choose among a variety of techniques. For example, a conventional LCD panel in a notebook computer relies on spatial color filters, in which each color pixel is divided into three sub-pixels and a red, green, or blue filter is applied to each sub-pixel. Given the tiny dimensions of microdisplays, color filters are not suitable, so other approaches must be used.

For projection applications, the microdisplays tend to be monochrome - only capable of displaying one color at a time - so a common solution is to use three panels. These are illuminated by separate red, green, and blue lights, and then the three images are combined using optics to create full color - an approach similar to that used in projection cathode-ray-tube (CRT) units.

Some projectors use a single chip, and illuminate it with different colored lights. These different images are produced so quickly that the observer's brain combines them into a single full-color image; this approach is referred to as "field sequential" color. Smaller projectors based on Texas Instruments' Digital Light Processor (DLP) are one example of projectors that use field-sequential color.

For virtual-display applications, field-sequential color provides the best solution. Because the same pixel passes all three colors, this method makes most efficient use of the available light and pixels. The microdisplay panel must operate three times as fast as a panel using color filters, but the high-quality circuitry of the single-crystal panels provides the rapid response times required for such applications.

Some microdisplay panels rely on diffractive effects to create color. As with a color-

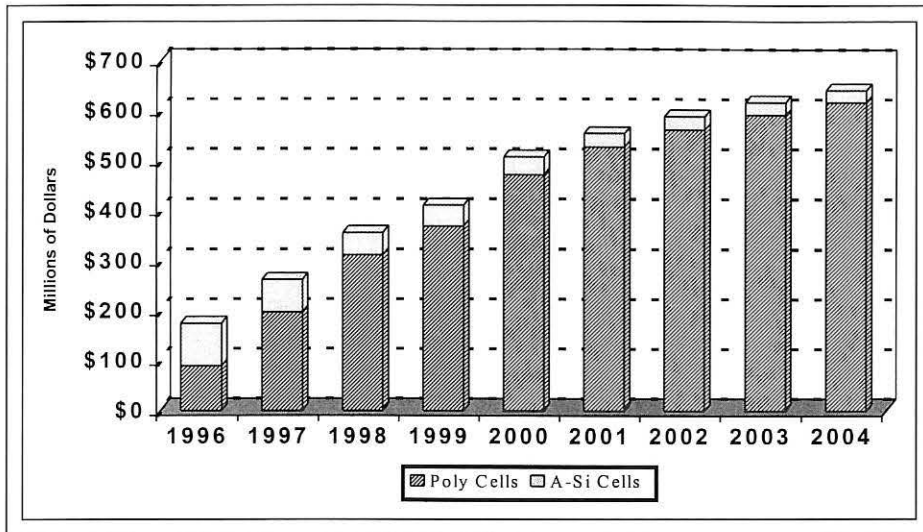


Fig. 3: LCD-projector sales are expected to increase over the coming years. (Source: Stanford Resources, Spring 1998)

filter design, the panel must have three sub-pixels – one each for red, green, and blue – which triples the required cell count compared with a monochrome panel of the same resolution. The color-separation efficiency of the diffraction approach needs to improve for better color performance, but this design does have the advantage that there is no light loss compared with the color-filter approach.

Different vendors have chosen to back different microdisplay technologies. At Kopin, we believe that CMOS-based AMLCDs offer the best technology for virtual-display applications. In addition to cost and production advantages, CMOS-based AMLCDs are well-suited for use as portable personal electronics products – such as calculators, watches, and pocket TVs – and their low-cost, low-power, and low-weight features will make them attractive microdisplays for the next generation of pocket information appliances.

Microdisplay Markets

Microdisplay technology has been available in various forms for some time, but recent advances and market trends give reason to expect that sales of these devices will grow rapidly. We expect to see many more new products introduced in 1999, along with increased competition among microdisplay vendors in both technology and marketing.

The major application for projection displays will continue to be projectors. The greatest growth potential lies in consumer

products, where sales volumes are measured in the multiple millions of units. Virtual displays are well-suited for a number of consumer-product applications, including digital cameras, smart phones, videophones, PDAs, viewfinders, and head-mounted displays (HMDs).

In addition to all the competing microdisplay technologies, alternative technologies

create a competitive sandwich above and below. For example, electrically controlled birefringence (ECB) twisted-nematic (TN) and supertwisted-nematic (STN) passive-matrix LCDs provide low-end choices for product designers, and poly-Si AMLCD and CRT displays stand ready to compete at the high end. In order to compete effectively, microdisplays must offer better price/performance than the other technologies. In order to compete effectively with other display technologies in these areas, it is generally believed that the price for microdisplays should be less than \$50 apiece.

Currently, production capacity is available at low cost in Asian integrated-chip foundries; these are capable of fabricating chips with 0.35–1.0- μm design rules. As a result, reduced costs for microdisplays in general – and virtual-display chips in particular – may be possible in the short term.

Microdisplays offer size, power, and resolution advantages that place them in a good position to compete with other technologies. For example, direct-view ECB TN- and STN-LCDs are commonly used in mobile phones. As the need for more information content increases, virtual displays will be needed to provide users with access to e-mail, digital images, information services, videophones, and Web browsers.

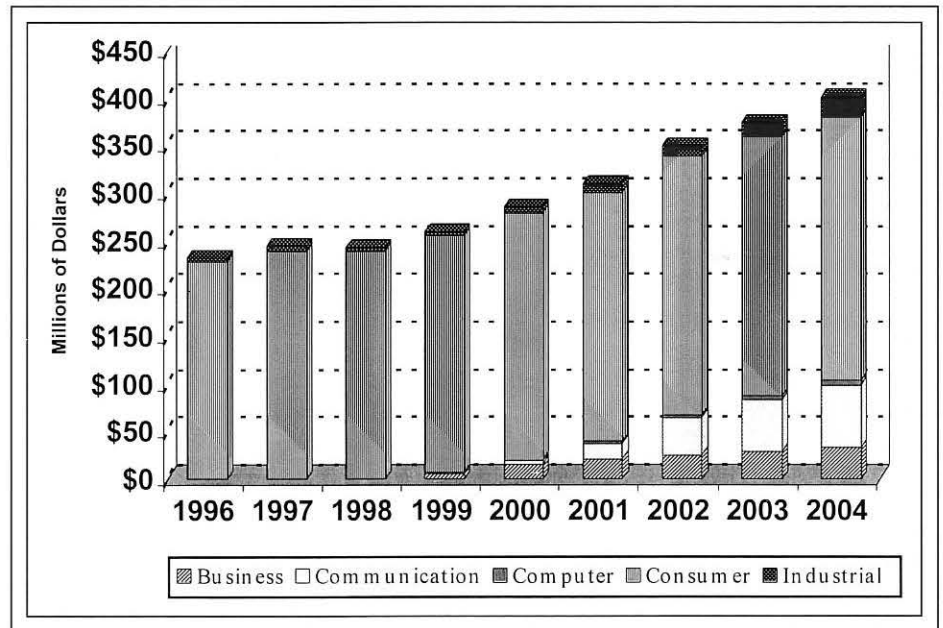


Fig. 4: Miniature-LCD sales are now expected to increase rapidly. (Source: Stanford Resources, Spring 1998)

microdisplays

Table 2C: Microdisplay Vendors Using Other Technologies

Company	Location	Control Matrix	Light Modulation/ Generation	Color	Applications
Daewoo	Seoul, Korea	PLZT (ceramic)	Actuated mirror	Color wheel 3 panels	Projector
Display Research Labs	Palo Alto, CA	CMOS	Vacuum-fluorescent phosphor	Monochrome	Virtual display
FED Corp.	Hopewell Junction, NY	CMOS Si	Organic LED	3 phosphors	Virtual display
Ise	Mie, Japan	CMOS	Vacuum-fluorescent phosphor	Monochrome	Virtual display
Microvision	Seattle, WA	CMOS Si	Microelectro-mechanical (MEM) system	3 lasers	Virtual display
Micron Display Technology	Boise, ID	Silicon	Field emission	Monochrome 3 phosphors	Virtual display
Motorola	Tempe, AZ	CMOS Si	GaAs LED matrix	Monochrome	Virtual display
Planar	Beaverton, OR	CMOS	Thin-film EL	Mono LC shutter	Virtual display
Reflection Technology	Waltham, MA	Mechanical scanner	GaAs LED array	Monochrome 3 panels	Virtual display
Silicon Light Machines	Santa Clara, CA	CMOS	Diffraction Micro-mechanical	Inherent color	Projector Virtual display
Texas Instruments	Dallas, TX	CMOS	Micro-mechanical Mirrors	Color wheel, 3 panels	Projector

Note: TFEL, thin-film electroluminescence; LED, light-emitting diode.

Virtual displays are in a good position to capture this market, as can be seen in comparing a typical STN panel with the Kopin CyberDisplay 320C LCD. Compared with the monochrome STN resolution of 32×100 , the CyberDisplay offers 320×240 resolution, and in color. The direct-view STN offers up to a 3-in.² image size, but the virtual image of the CyberDisplay can range from 5.4 to 10.5 in.², depending on the angle of the field of view. The CyberDisplay has a 100:1 contrast ratio - compared with 20:1 for the STN-LCD - and draws one-half to one-thirteenth as much power, with a 6-75-g weight savings.

Another potential application is as an image viewer on a digital camera. Compared with a typical 1.8-in. direct-view AMLCD panel, the CyberDisplay offers an image size 3-7 times

as large, higher resolution (320×240 compared with 93×220 pixels), one-seventeenth the power draw, and one-third the weight.

In general, forecasts for the projector and virtual-display microdisplay markets are positive. According to data provided by David Mentley, Vice President of Display Research, Stanford Resources, Inc., LCD projector and microdisplay sales are expected to nearly double over the next 6 years (Figs. 3 and 4).

Microdisplay Vendors

The strong potential for the various microdisplay markets has drawn the attention of many different vendors, and competition is expected to be fierce. More than 30 vendors are participating in the microdisplay field. Some of the major microdisplay vendors are Colorado

MicroDisplay, Displaytech Inc., Kopin Corp., MicroDisplay Corp., Siliscape, and Three-Five Systems. Each company has its own approach, and is aiming its technology at a specific set of applications (Tables 2A, 2B, and 2C).

At Kopin, we believe that we have taken the early lead in three important key areas: technology, manufacturing, and marketing. Kopin was the first virtual-display vendor to demonstrate the use of color-sequential techniques for color generation, and it has made many innovative technology advances in low-power, low-voltage, high-speed TFT-LCD device design and fabrication. In manufacturing, Kopin has increased its display production volume in its own U.S. production line, and has also established a high-volume TFT-LCD foundry in Taiwan. In marketing, Kopin has established important partnership agreements with a number of major vendors, including Siemens, Motorola, Gemplus, and FujiFilm Microdevices.

Small Displays Have a Big Future

With the ever increasing demands for the high-resolution portable and personal communications devices, microdisplays offer a compelling solution. Microdisplays already command the data-projector market. Personal communications products with virtual displays will become available to consumers in the near future, and these products will have tremendous appeal because they will be capable of displaying graphics information while maintaining both long battery life and low cost. It looks as though the "next big thing" may be very small indeed. ■

SID '99

Symposium, Seminar,
and Exhibition

San Jose, California

San Jose Convention Center

May 16-21, 1999

editorial

continued from page 2

But I am reminded that the television remote control was invented (by Eugene Polley and Robert Adler) because Zenith founder Eugene McDonald was convinced that TV viewers would not tolerate commercials. While McDonald waited for the collapse of commercial television and its replacement with commercial-free subscription television, he believed viewers would appreciate a wireless remote for muting the sound of commercials. It took a long time, but subscription TV is here in the form of cable and satellite distribution. With picture quality eliminated as a distinguishing characteristic, which form of distribution will viewers choose? Or will they continue to choose both?



The science-fiction writer Robert Heinlein once wrote that people get the elected officials they deserve; they get people very much like themselves. We also get the television (and Internet and CD-ROM) programming we deserve; we get what we watch and pay for. As consumers, viewers, and citizens we can encourage ennobling drama, perceptive news analysis, insightful comedy, and new modes of education and information distribution.

As members of the display community, we make the box.

- KIW

We welcome your comments and suggestions. You can reach me by e-mail at kwerner@sid.org, by fax at 203/855-9769, or by phone at 203/853-7069. The contents of upcoming issues of ID are available on the ID page at the SID Web site (<http://www.sid.org>).

Please send new product releases or news items to Information Display, c/o Palisades Institute for Research Services, Inc., 411 Lafayette Street, 2nd Floor, New York, NY 10003.

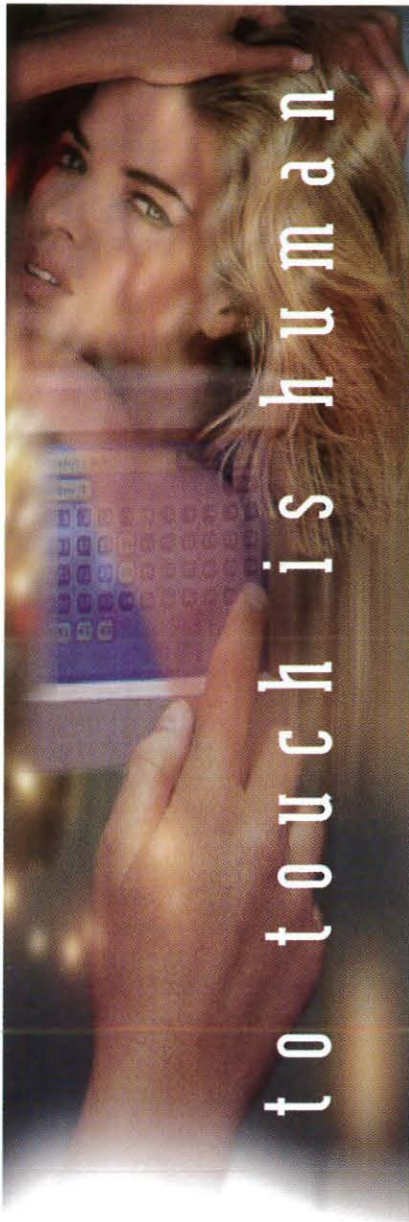

Touch Solutions

Standard and Custom Touch Screens, TouchMonitors, LCD/Touch Systems, Interface boards, Software Drivers, Chip-sets... you name it - we have it. If you want to add power of touch to your product, you need CyberTouch.

It's that simple!

Get in touch with CyberTouch.



CyberTouch

Touch Screens • Touch Monitors • Touch Systems

805.499.5000 • Fax 805.499.5888

sales@cybertouchusa.com

www.cybertouchusa.com

The Smart Choice in High Speed Video Generators

ASTRO VG-851/854



Dot Clock to 400 MHz

Horizontal Scan to 300KHz



Extremely easy operation from front panel or PC

Highest Available Performance



256 Levels at all Frequencies



Fully compatible with all HDTV-formats-even 1080p

Accepts Bitmap-Files



NEW CONCEPTS in Highest Performance, Flexibility & Ease of Operation:

400 MHz for true 2K x 2K resolutions; Storage of more than 1000 Timing/Pattern Programs in Flash Memory and EEPROM; Fully PC-compatible with "Bitmap" capability; direct access to any parameter from front panel or through PC-programs. And any of the (E)EPROM you used in earlier units can still be used.

That's what we call High Performance, Flexibility and Ease of Operation!

Make the Smart Choice...

Contact TEAM Systems
1-800-338-1981
www.team-systems.com

TEAM

systems

"Test And Measurement Technology"

Circle no. 12

Image Processing for Flat-Panel Displays

If FPD-based monitors are to challenge CRTs, we must have the electronics to solve the "native-format problem" – and we do.

by Ernest Yeung

NO LONGER LIMITED to just notebook computers, flat-panel displays (FPDs) are appearing in other parts of our daily lives in various forms, from plasma-display panels (PDPs) in our living rooms to liquid-crystal-display (LCD) monitors on our desktops. The fastest growing market segment for FPD products is as stand-alone screens, instead of being incorporated into a larger system (such as the screen of a medical instrument). Sophisticated electronics can produce high-quality images seamlessly from a range of different video and graphics formats, and have become the "behind-the-scenes" heroes of the FPD revolution.

In order to display different source signals, the FPD controller must master several complex tasks. If the resolution of the image is different from the panel's native resolution, the source image must be scaled up or down to fit. The timing of the source signal and the display must be synchronized, even though the clock frequencies are not as accurate as they might be. In some instances, the frame rate must be converted to the slower rates required by most FPDs. And the electronics must be able to identify the resolution and frequencies of source signals as accurately and

Ernest Yeung is a product development engineer at Genesis Microchip, Inc., 200 Town Centre Blvd., Suite 400, Markham, Ontario, Canada L3R 8G5; telephone 905/470-2742 x2303, fax 905/470-0612, Web site: <http://www.genesis-microchip.com>. Genesis Microchip manufactures the ImEngine series of video/graphics processing ICs for projectors and FPDs.

rapidly as possible. The following provides some insight into how these problems are solved.

Image Scaling

Video and graphics devices produce a variety of display formats and resolutions. In order to maximize the compatibility and market potential of their products, FPD manufacturers strive to support as many different resolutions as possible with the same panel. This is less of a problem with CRT-type displays because their scanning rate can be changed relatively easily. FPDs are direct-address digital devices with a fixed resolution, which creates problems when trying to display a higher- or lower-resolution image.


One early solution to displaying a low-resolution image on a high-resolution display (which is still used in some laptop computers) is to display the unscaled image surrounded by a black border, leaving a significant region of the display unused. As the resolution of current display panels increases, this method becomes less acceptable because more of the screen becomes unused and the image region becomes uncomfortably small. A more acceptable solution is to scale, or resize, the image to the full resolution of the display panel, using a real-time image scaler.

Primitive image scalers simply replicate input pixels to create a larger image when displaying a lower-resolution image, or discard pixels to reduce the image size of higher-resolution images. Slightly more complex systems interpolate between pixels to smooth the output image. These systems do not offer satisfactory results, and phase sensitivity is the


most prominent problem. Depending on the sampling phase at a given location on the display, certain pixels are processed by the image scaler while others are ignored. This discrimination causes distortion in the output image – lines of identical thickness in the original image appear to be of different thickness in the scaled result. This can distort text and make it difficult to read, while curved lines often take on a jagged edge.

An enlarged photograph of an LCD monitor with an inferior image scaler, displaying text and graphics scaled from 800 × 600 (SVGA) to 1024 × 768 (XGA), shows that the vertical and horizontal lines at the edge of the image do not appear to have the same thickness, though they are supposed to be the same. The text also suffers from random distortion, making it hard to read [Fig. 1(a)]. Consumers who pay a premium price for LCD monitors and other FPD products expect nothing less than exceptional image quality on their displays. Mediocre image scalers render the scaled output of an FPD system inferior to even low-end CRT systems, making them unattractive to the consumer.

High-quality image scalers employ sophisticated digital-signal-processing (DSP) techniques and algorithms. The exact implementation of these scalers is usually proprietary and the product of cutting-edge research. These scalers ensure that the resampled output image closely resembles the input and remains free of undesirable artifacts and distortion. Note that when the same source material as in the prior example is scaled and displayed on an LCD monitor which employs a high-quality image scaler, the lines are not distorted and

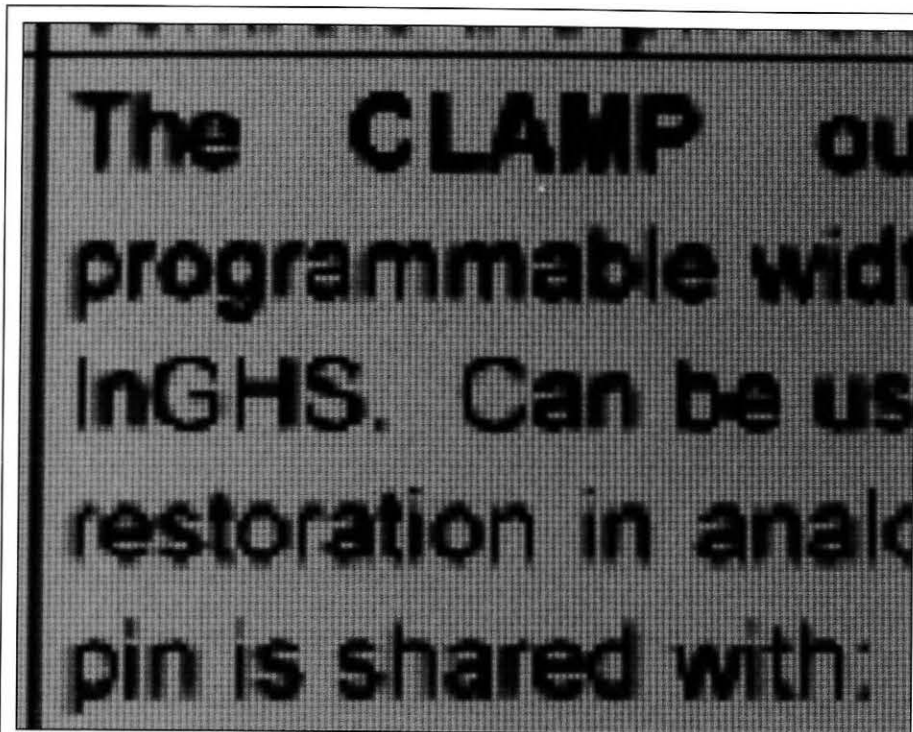

(a)

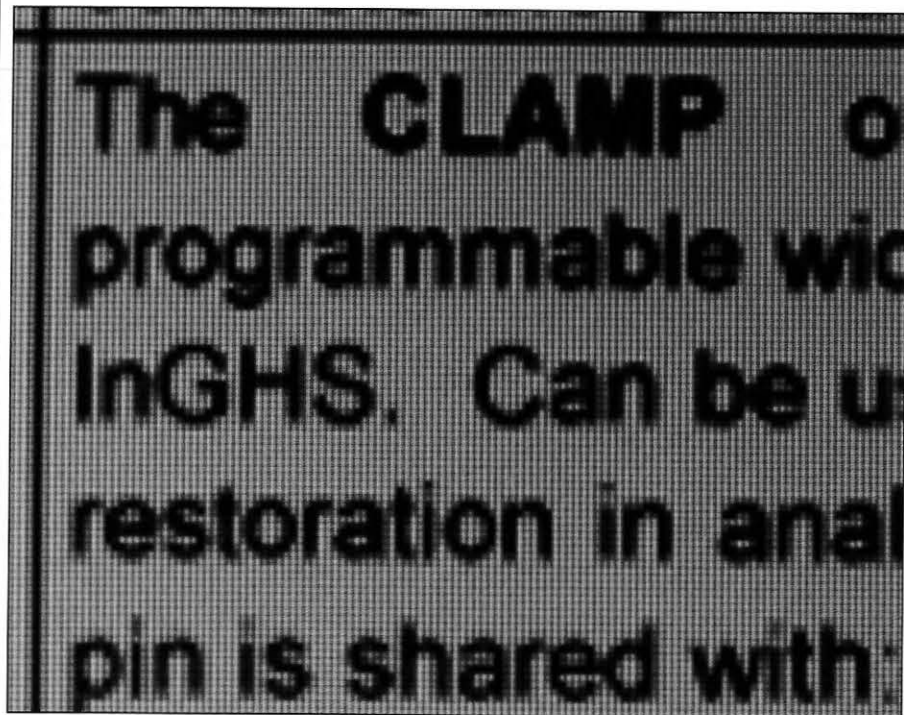

(b)

Ernest Yeung

Fig. 1: These magnified views of an 800×600 image scaled up to a 1024×768 panel show the difference between (a) inferior and (b) high-quality image-scaler technology.

the text is sharp and easier to read [Fig. 1(b)]. Simple image scalers can be implemented in programmable logic chips, but high-quality image scalers are generally available as application-specific integrated circuits (ASICs) due to their high complexity.


Aspect-ratio conversion – particularly for plasma screens – is another application of scaling technology. Many display panels intended for home-entertainment applications have an aspect ratio of 16:9 in order to accommodate both wide-screen movies and possible future HDTV broadcast images. The overwhelming amount of video material available to consumers today – from television broadcasts to movies on videotapes – is formatted in the 4:3 (12:9) ratio. Without aspect-ratio conversion, either the top and bottom parts of the image must be cropped off (similar to pan and scan) or black borders must be shown on the left and right sides of the screen (similar to letterboxing). Neither of these approaches represents a satisfactory solution because one discards image data and the other leaves a significant portion of the screen unused. Furthermore, either technique would further extend the “pan-and-scan vs. letterbox” debate raging in the consumer-video market today. The best solution would take maximum advantage of wide-screen displays with current video material, which can be accomplished by “stretching” the image horizontally to fill the entire screen.

A simple way to alter aspect ratio is to magnify the video image by a larger amount horizontally than vertically. The resulting image would look squeezed, however, and less pleasing to the eye. A more advanced technique relies on non-linear scaling. Because the region of interest in most video material is at the center of the image, scaling should not be applied to this area to ensure that it remains distortion-free. At a predetermined horizontal distance from the center, a small amount of horizontal magnification is applied to the image. The magnification ratio is gradually increased towards the sides of the original image. Although this process is non-linear, the result is pleasing and natural because it preserves all the content of the original source image while still filling the entire screen (Fig. 2).

Display Synchronization

If the input and display images differ in reso-

FPD image scaling

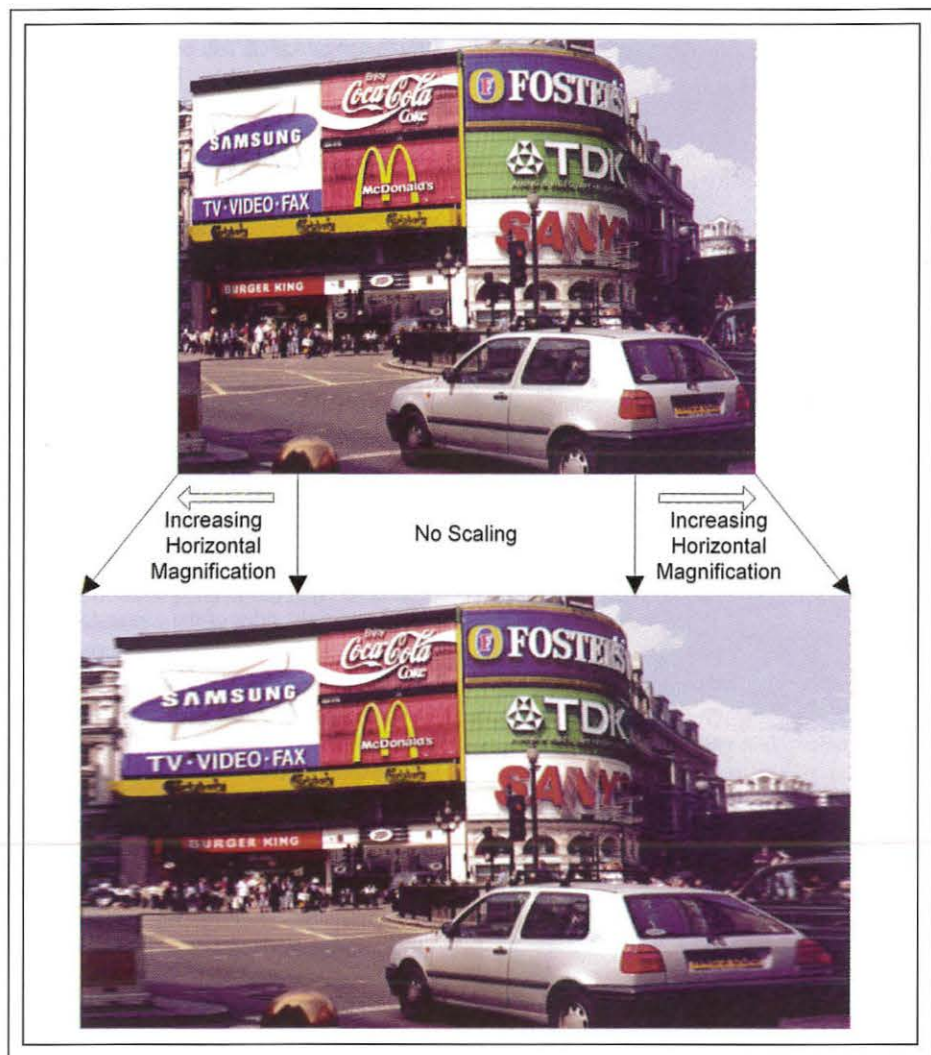

Ernest Yeung

Fig. 2: Non-linear aspect-ratio conversion makes it possible to scale traditional 4:3 images to the new wider 16:9 format by expanding the outer edges of the image and leaving the center region unchanged.

lution, two separate clocks are needed in order to accommodate the different amounts of image data. Since the clock frequencies are generally not accurate, the input and display images will drift away from each other as time goes by and the display image will be corrupted. Hence, a mechanism is needed to ensure that the input and display images are synchronized with each other. At this point in the process, the input frame rate equals the output frame rate, so a synchronized system means one input frame must result in exactly one display frame.

A common display-synchronization technique employs a **lock event**. This event is a

pre-programmed point in the input region.

When this point is reached, the system forces the output display to return to a specific point in the output region, usually to the beginning of a display frame. The lock event is determined by a combination of various factors, such as the input format, the system latency, and the capacity of the image-scaling memory buffer (required by most high-quality image scalers).

This display-synchronization mechanism continually forces the output display image to be in lockstep with the input video to guard against any variation in clock frequency and clock jitters.

Other display-synchronization methods exist, some of which are available only to FPDs. For example, the total number of clock cycles in a line is not critical for FPD applications, so a **line-lock** technique is often used; this technique is a proprietary technology for which a patent has been applied. The issue of display synchronization is often overlooked, and its correct implementation is crucial for a reliable display system.


Frame-Rate Conversion

Most FPDs today support a screen refresh rate up to 60 Hz. While this is not a problem for video signals - NTSC runs at 59.94 Hz, while PAL runs at 50 Hz - graphics controllers for computers and workstations can generate output at 85 Hz or faster. The frame rate of the graphics signal must be reduced to accommodate the slower FPD. On the other hand, it might be necessary to display a slow input signal on a fast FPD, which would require speeding up the signal's frame rate. To accommodate source material with different frame rates, many display systems incorporate a frame-rate converter.

A frame buffer with independent write and read clocks can be used as a simple frame-rate converter. The graphics data can be written into the frame buffer at the input frame rate, continuously updating the buffer memory with new images. At the same time, data is read out of the buffer memory and displayed at the output frame rate. This implementation is inexpensive and simple and is used in desktop LCD monitors, as well as in many systems. Here, some output frames may consist of image data from more than one input frame, a condition known as **frame tearing**.

Frame tearing sounds worse than it looks and is generally unnoticeable when displaying computer graphics or video sources with little motion between frames. In order to prevent frame tearing, a frame buffer with memory capacity for two frames can be used. While one buffer is being updated with input data, the data in the other buffer is read out and displayed. Careful management of the read and write memory access pointers will ensure that they never cross each other, and frame tearing does not occur. This technique is known as **double buffering**, and it adds only minimal cost overhead, especially when the pointer management is already implemented in an ASIC.

For high-end video displays, **temporal filtering** - filtering many input frames to gener-

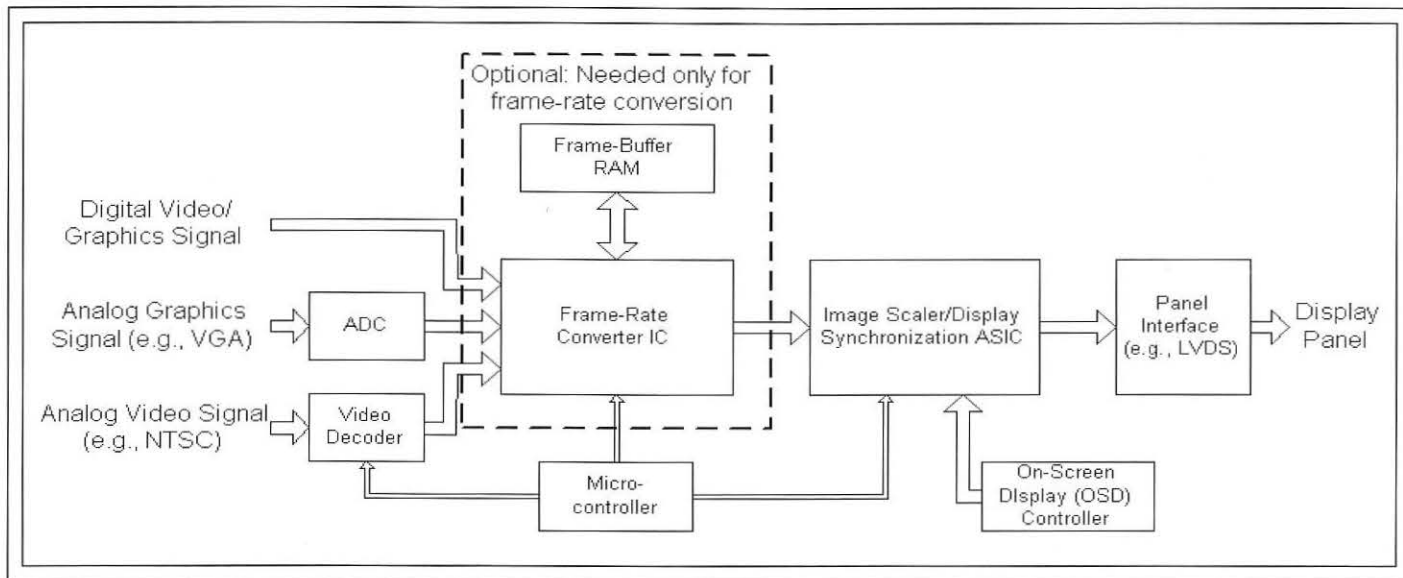

Ernest Yeung

Fig. 3: An image scaler is one key component of a controller for an FPD system.

ate an output frame – may be performed to eliminate the effect of frame tearing. For most video systems, the cost and complexity of temporal filtering does not justify the marginal increase in quality.

Format Detection

A buzzword in the consumer technology market is “plug-and-play,” highlighting the consumer’s unwillingness to fumble with a system for hours before getting it to work. When a new video source is connected to an FPD system, consumers expect the system to detect the format of the incoming signal and reconfigure itself automatically. Unfortunately, there are many different video and graphics formats, and the problems are made more difficult by the large number of non-standard permutations that exist for the various formats. Fortunately, the image signal formats can be detected with ease, using a bit of ingenuity.

Video-signal frame rates are easy to detect because the vertical synchronization (VSYNC) signal present in most video systems occurs exactly once per frame. The frame-rate information itself is often unimportant because in most cases the frame-rate converter would convert the input frame rate to one which is more appropriate for the display panel. A more challenging issue is to locate the active region of a video signal – the image itself. The active region is surrounded by a blanking region that should not be displayed.

Since the blanking region often contains black image data and the active region usually contains non-black image data, a generally accepted method of *active detection* is to simply examine the image data. This simple method works surprisingly well, and its reliability can be improved if a non-black test image can be provided to the system.

The detection of the incoming video signal is useful for other reasons, such as the configuration of video decoders and analog-to-digital converters, or support for automatic power-down features. The detection itself is usually performed using a hybrid hardware/firmware solution. The hardware is needed to process the high-speed image data and to provide “hooks” so the system microcontroller can have access to the pixel data. The microcontroller firmware provides the flexibility needed to cope with new formats and to handle infrequent computations that are more cost-effectively performed in firmware. For example, when a display system is powered on, certain internal clock phase adjustments have to be made. The FPD controller can provide the microcontroller with access to the pixel data, and an algorithm in the microcontroller firmware can analyze the pixel data to determine the optimal phase setting.

System Overview

An FPD controller must be designed to handle all these tasks (Fig. 3). The controller may

have to accept graphics and video signals in both analog and digital formats. Analog signals are digitized by a video decoder or multiple analog-to-digital converters, while digital signals can be processed directly. If needed, a frame-rate-converter ASIC (with its companion frame-buffer memory) can provide the display panel with the required frame rate. The heart of the system is an image-scaler and display-synchronization ASIC, which scales the source material to fit the display panel and ensures that the proper synchronization is always achieved. If desired, an on-screen-display (OSD) controller can be added, providing a convenient user interface for display-system configuration. The image data is finally transmitted to the display panel via a panel interface. The system can be highly integrated, and its cost can be surprisingly low.

The Big Picture

There has been extraordinary progress made in FPD technology. The display panels today are bright, sharp, and power-efficient, and they are fast becoming cost-effective alternatives for many applications that were traditionally handled by other display technologies. Credit for this success must be shared with the advances made in the electronics that drive these FPDs. Working together, the high-quality display panels and sophisticated controlling electronics create the excellent images that drive the FPD revolution. ■

The Military Display Dilemma

The U.S. military can no longer use CRTs, and cannot afford to acquire LCDs – unless it substantially modifies its “corporate culture.”

by Kenneth E. Sola

THE U.S. MILITARY can no longer use CRTs as primary displays on its platforms. The burdens of CRT weight, bulk, power demand, and heat generation, tolerated for so long, have been increasing with display size. The continued availability – and the rising cost – of CRT-display replacements has become a serious issue. The problem is already critical on the Air Force E-3 AWACS and Navy S-3B Subhunter aircraft.

Perhaps a more ominous problem is the reduction in airframe life caused by carrying the excessive weight loads of CRTs. The U.S. Navy EP-3E Electronic Intelligence (ELINT) aircraft carries 1377 lbs. of fully militarized CRTs on its missions (Fig. 1). (Some of these CRTs weigh 165 lbs. each.) This aircraft is already overweight to the point where non-mission-critical equipment, such as bunks and galley tables, is being removed. Airframe life is being reduced to a critical point on this aircraft because of the display load, since gross take-off weight, total flight hours, and flight in turbulent weather (which is common for the EP-3E) are major contributors to wing and airframe fatigue.

Susceptibility to electromagnetic interference (EMI) and reliability are also CRT problems. But perhaps the most pressing reason for the military to replace CRT displays on its ships, submarines, aircraft, and ground vehi-

cles is the mounting pressure to convert to flat-panel displays (FPDs). This persistent siren call is becoming so loud that it can no longer be ignored.

But can the military afford FPDs? The answer may be no. Price is not the primary issue. (It rarely is with the military, and FPD technology is rapidly becoming cost-competitive with CRTs.) The determining factor is performance. If FPDs are to replace CRTs as the primary visual display on military plat-

forms, FPD performance must be equivalent to that of CRTs.

Until automatic-target-recognition systems are mature enough to replace human operators, military visual displays must enhance or maintain – and certainly not degrade – the military operator’s ability to detect, identify, track, and successfully engage targets. It would appear that at least one type of FPD – the liquid-crystal display (LCD) – is ready for military prime time. Are these LCDs mature



Official U.S. Navy file photo

Fig. 1: The U.S. Navy EP-3E Electronic Intelligence (ELINT) aircraft carries 1377 lbs. of CRTs, and will soon be replacing many of them with LCDs.

Kenneth E. Sola is an engineering psychologist in the Crew-Systems Engineering Division at the Naval Air Warfare Center, Aircraft Division (NAWCAD), Patuxent River, MD 20670; telephone 301/342-9261, fax 301/342-9305, e-mail: SolaKE@navair.navy.mil.

enough to support military missions? Can they provide the resolution, information-coding capability (especially color), brightness, dimmability, response time, and overall range and flexibility of the venerable CRT? Can LCDs be gracefully integrated with software suites that produce on-screen displays carefully optimized for the current spectrum of CRT phosphors and drivers? Are the estimates of LCD reliability valid? What about the dependability of long-term supply – a critical military acquisition issue. (As this is written, there are indications that one of the two remaining onshore suppliers of military LCDs is in serious financial difficulty, and this follows the demise of two other suppliers

over the last year or so.) What risks do we incur by a lemming-like stampede to FPDs?

These and other questions were answered in a recently completed evaluation of LCDs conducted at the Naval Air Warfare Center, Aircraft Division (NAWCAD), Patuxent River, Maryland.¹

Can LCDs Perform? A Benchmark Study

Early in 1998, the U.S. Navy decided that one type of large-area high-resolution LCD technology was ready for a closer look. This was the highly touted NEC 2000 glass from Nippon Electric Corporation (NEC). Using a unique form of in-plane crystal

switching, this display solved the limited off-axis viewing problem so bothersome with earlier LCDs. Although the pixel dimensions, 1280 × 1024, are the same as those of current 19-in. CRTs, the NEC 2000's fully addressable 20.1-in.-diagonal size and roughly 200-in.² surface increases the total display area by approximately 30% over the 19-in. CRT. We at Patuxent River evaluated this panel as integrated by seven suppliers. The LCD evaluation focused on the applicability of NEC 2000 LCD glass to the military crewstation. The government labs used military sensor inputs, 37 military operators as test subjects, and replicated, as much as possible, fleet operational conditions during testing. Testing included signal detection and target identification in active and passive acoustics (Fig. 2), three forms of radar video [surface surveillance, synthetic aperture radar (SAR), and inverse synthetic aperture radar (ISAR)], and electro-optical video.

The video capability of NEC 2000 LCD glass was of special interest in this testing, since questions regarding video capabilities had already been raised. (Tom Holzel eloquently expressed these concerns in the March 1997 issue of *Information Display*.²) To clearly isolate the differences in video performance between CRTs and the NEC 2000 LCD glass, live and videotaped sensor videos were supplemented with generated video test patterns during testing (Fig. 3). These generated patterns were presented dynamically: they rotated, moved across the screen, and rapidly changed resolution, and the checkerboard patterns underwent reversal of their contrast levels. These patterns clearly demonstrated operationally significant differences between the CRTs and LCDs in the “dynamic contrast ratio” discussed by Holzel.

Some units were subjected to cold-soak testing at 50°F, and all units were evaluated in the photometrics laboratory for luminance, off-axis viewing, color gamut, and other parameters (Fig. 4). Because the goal of the study was to determine if these LCDs could replace the color CRTs currently in the crewstations, all testing was conducted in a comparative mode. The test subjects continuously compared each LCD submitted for testing against high-performance CRTs in a completely controlled evaluation designed by experimental psychologists familiar with the military missions (Fig. 5).


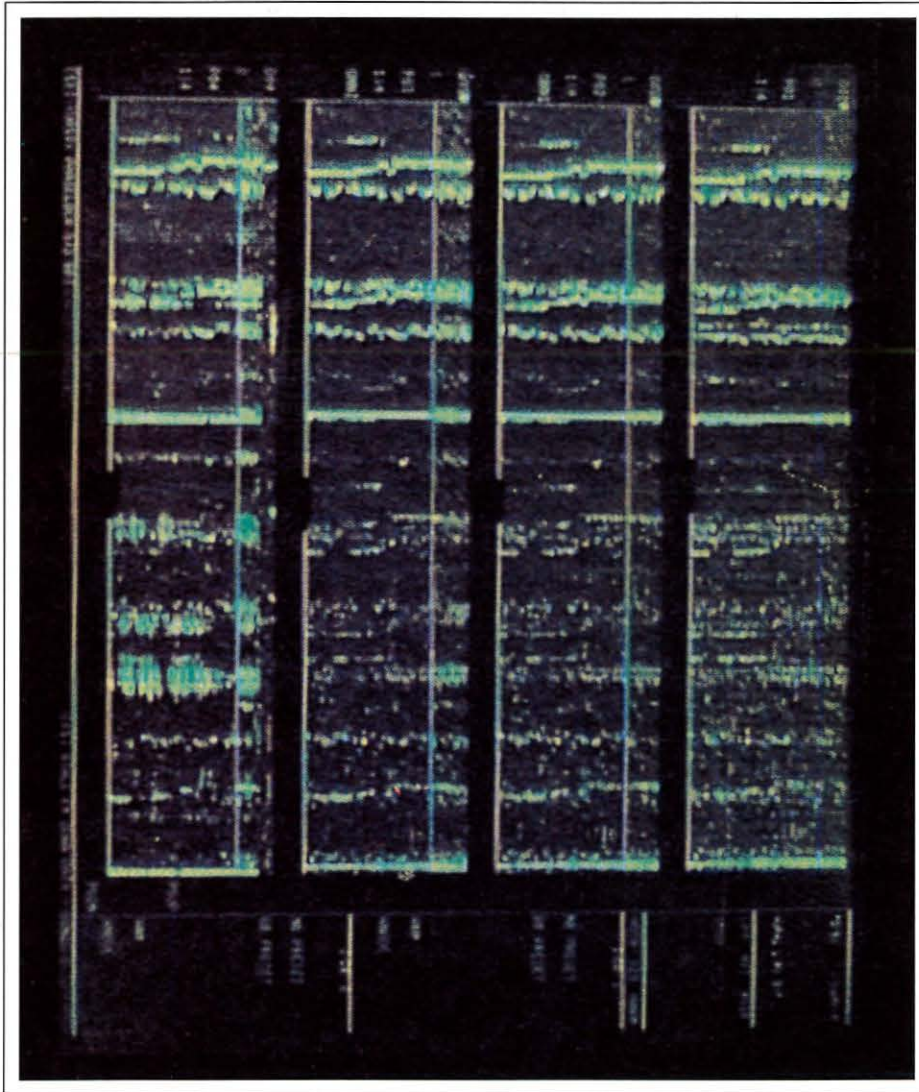


Fig. 2: A passive acoustic sensor display in Navy LCD evaluation.

Official U.S. Navy file photo

military displays

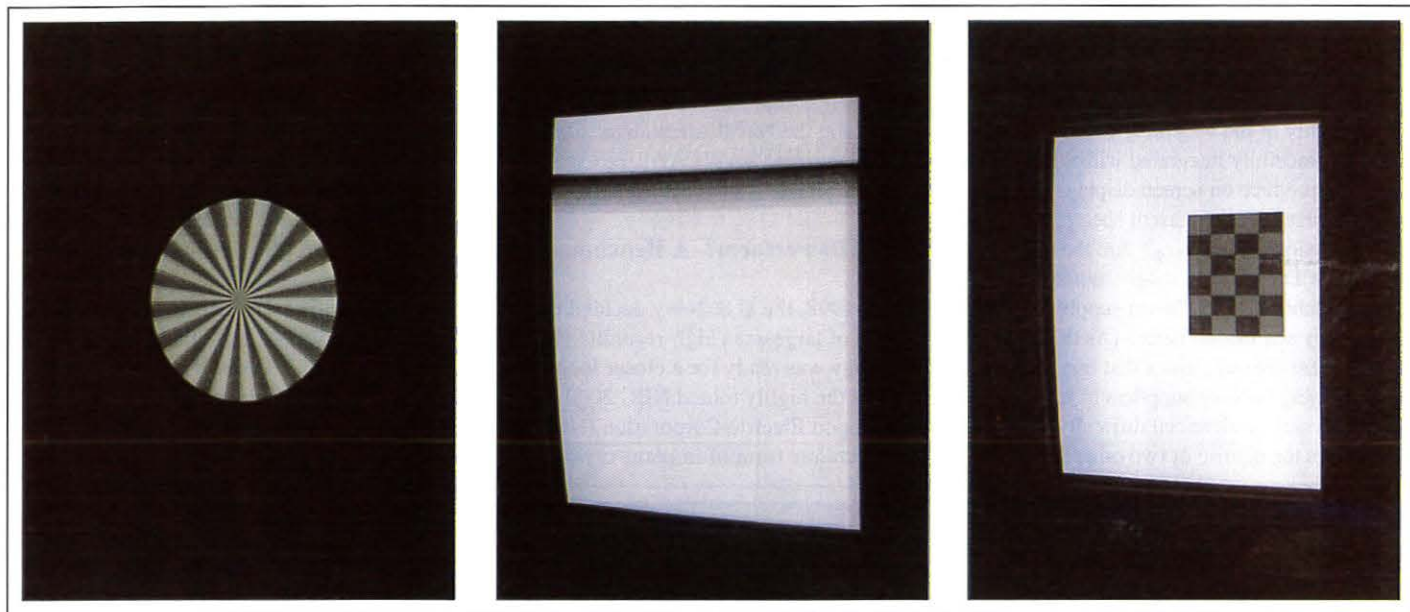

Official U.S. Navy file photo

Fig. 3: Three of the generated test patterns used to isolate differences in CRT and LCD video performance.

The original plan was to test only a small sample of the display industry's integrations of NEC 2000 glass; the plan changed. Seven suppliers offered units for evaluation: Aydin, BARCO, Codar, GTE, L3 Communications, Raytheon, and Tech Electronics. Some units were configured with EMI shielding consisting of either metal mesh or grounded indium tin oxide. Most were not EMI-shielded.

There was a wide range of performance and operator preference among these units, despite the fact that all used the same LCD glass. The final report, in which the suppliers' identities are coded, contains the full details and results of this LCD evaluation.¹ A summary of the results, negative and positive, is provided here.


Negative results. Smearing of rapidly moving video images was evident. Waterfall acoustic gram blink (flicker at dense variable-intensity screen updates) occurred on all units. (BARCO has since solved this problem.) High backlight levels and backlight non-uniformity were common. Display control suites varied widely; some were unacceptable.

Positive results. There was extraordinary industry response in reviewing the test plan, suggesting differentiators, offering units for evaluation, and responding to the problems noted. Off-axis viewing was not a problem with NEC 2000 glass. The LCD received high scores from the operators/evaluators in many of the tests, and scored higher than the

CRT in character clarity and some forms of radar video.

On balance, NEC 2000 glass – as offered by some suppliers, properly driven, and prop-

erly integrated into the military-platform display systems – was indeed qualified to replace on-board CRTs. Based on these findings, the Navy proceeded immediately to draft a perfor-

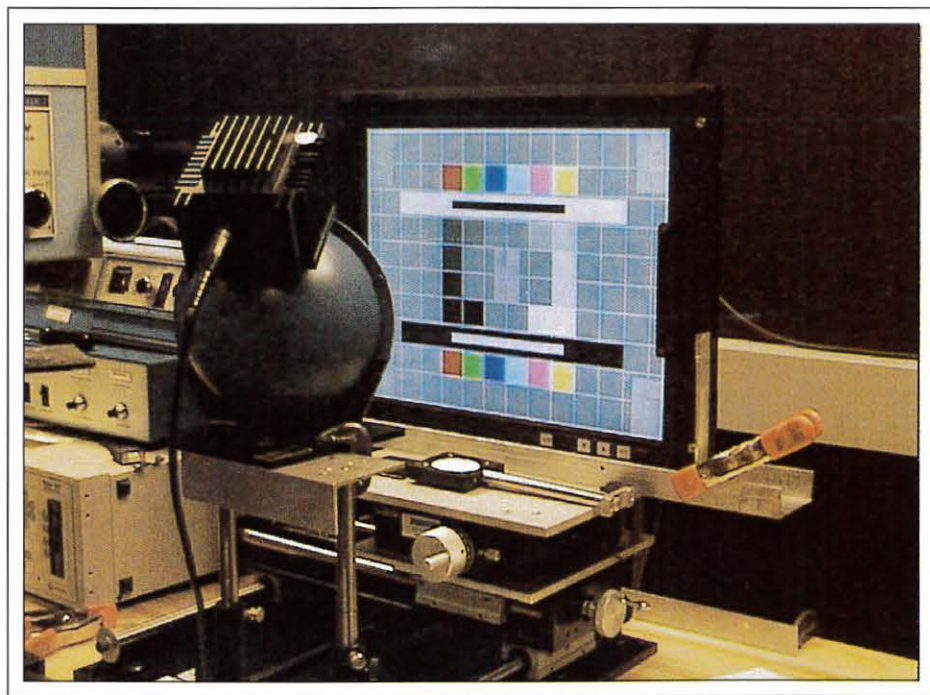

Official U.S. Navy file photo

Fig. 4: An NEC 20.1-in. LCD being photometrically evaluated at the Navy's laboratories in Patuxent River, Maryland.



Official U.S. Navy file photo

Fig. 5: LCDs and CRTs were tested side by side in the Navy's LCD evaluation. This phase of the testing compared the electro-optical sensor output.

mance-based display specification and to initiate an acquisition program to replace CRTs at the tactical crewstations in many of its large aircraft, including the EP-3E aircraft. Integration of these displays into these platforms is planned for the very near future.

The Military Can't Afford FPDs

If LCD deployment in large Navy aircraft is now proceeding rapidly, why is the military "stymied" and perhaps unable to afford FPDs? Quite simply, it is because display technology evolves rapidly, but military attitudes and acquisition practices are inclined to change at a glacial rate. As a result, the military really cannot afford FPDs - not until it radically changes many of its attitudes.

The military community is very much like the rest of us, who, when moving, carry junk from one house to the next. There is a great deal of inflexibility in specifying and procuring systems. We insist on having all that we currently have - even though much of it is bad - as well as having all of the best of what's new.

We have not fully embraced the concept of commercial off-the-shelf (COTS) equipment. We sometimes insist on unrealistic durability and longevity - even when the longevity of

rapidly evolving systems is a clear and absolute negative (as in computers, for example). But most important of all, we cannot cooperate among ourselves.

There are currently dozens of ongoing military display acquisitions throughout the Services. There is little or no collaboration - or even sharing of information - between the programs. We bought unwisely throughout the halcyon years of the military - *i.e.*, before the dissolution of the Soviet Union - and we have not yet faced up to the new realities. Our house is cluttered and inefficient. It is time to clean that house.

Sadly, although the plan for that house-cleaning lies clearly before us, it is not being executed. We simply have to do the following:

- Begin effective inter- and intra-Service collaboration.
- Accept the utility (and inevitability) of COTS.
- Radically revise our specification of system "requirements."
- Accept the logic of "engineering trade-offs" completely.
- Adapt our minds and our missions to the best, most cost-effective solutions.

- Increase our emphasis on the Integrated Product Team (IPT) concept in cooperation with the display industry.

Admiral N. Gorschkov, former Admiral of the Soviet Fleet, once restated a very popular cliché: "'Better' is the worst enemy of 'good enough'." If we systematically apply this to military display acquisition, we arrive at the following:

- CRTs are not "good enough" (*i.e.*, we can no longer accept them). Therefore, something "better" is required.
- Among the flat-panel technologies, LCDs are better - and good enough right now to replace CRTs, with some compensations and workarounds.
- However, our disjointed and over-specified acquisition processes are not "good enough." We must improve them.
- But we are not yet capable of making the changes in attitude necessary to update our acquisitions to be in tune with the *Zeitgeist*, the realities of our current world.

We are faced with these final truths. The military cannot accept CRTs. Neither can the military afford to acquire FPDs, given current acquisition practices. Finally, the military cannot continue to procrastinate in solving this dilemma.

References

- ¹Ken Sola, Karen Garner, and Mike Mikulewicz, "The Liquid Crystal Display (LCD) Evaluation," U.S. Navy Technical Report, Report No. NAWCADPAX-98-79-TR, 9 July-11 September 1998.
- ²Tom Holzel, "The Emperor and His Flat Panel Displays," Guest Editorial in *Information Display* 13/3, 3 (March 1997). ■

SID '99
San Jose, California
San Jose Convention Center
May 16-21, 1999

Flat Panel Testing... FAST & SIMPLE!

The SS220 is the easiest and quickest way to test your flat panels! The system is portable and compact, fitting easily into your test area. No integration or mechanical fixturing is required. A simple click of the mouse and your test suite is on its way to completion, providing accurate display measurements AUTOMATICALLY!

The SS220 Flat Panel Test System:

- Fully Automatic Off Axis Measurements
- Spectrometer Based - Luminance & Chromaticity Measurements
- Automatic Measurements to VESA, ISO 13406 & TCO 95 Standards
- Complete Turnkey System
- Panel Drive Electronics

Measurements:

- Chromaticity vs. Viewing Angle
- Contrast vs. Viewing Angle
- Luminance & Color Uniformity
- Spectral Plots
- Contrast Ratio Plots
- Back Light Characterization
- Reflectance (BRDF)



MICROVISION

550 High St., Auburn, CA 95603
Tel: (530) 888-8344 Fax: (530) 888-8349
Email: sales@microvsn.com



Visit our Website at:
www.microvsn.com

SOMEWHERE ON THE SPECTRUM BETWEEN EXCELLENCE AND PERFECTION...

Circle no. 13

Interface Solutions for flat panels

Speed up development and product realisation time with our high quality flat panel interface controllers for your LCD, Plasma or EL projects. Suitable for small or high volume projects and monitor production.

Analog - Computer

AC series: A range of interface controllers for LCD, Plasma or EL, to connect to analog graphics source.
VGA (640x480), SVGA (800x600), XGA (1024x768), SXGA (1280x1024).

SV-Series: A combination interface for both computer graphics and video (PAL, NTSC) for LCD & Plasma.

► NEC analog panels are also supported.

Digital View

USA: Tel: 408-782-7773, Fax: 408-782-7883
England: Tel: (0)1438-816 600, Fax: (0)1438-816 909
Hong Kong: Tel: 2861 3615, Fax: 2520 2987

Bus card - PC

DC series: Includes PCI bus LCD graphics card for providing LCD digital signal output from a PC.



Video - PAL/NTSC

PN series: Advanced multi system video interface for TFT LCD and Plasma panels.

Accessories: A wide variety of support accessories.

Enclosure options:

- Open frame kits: panels & interface controllers in easy to use frames.
- Industrial display systems
- Desktop monitors
- LCD multimedia systems

Internet: www.digitalview.com
Email: sales@digitalview.com

Circle no. 14

VIDEO REFERENCE IMAGE GENERATOR

*The V.I.
Model 875A
gives you
the picture!*



- Programmed as **you** need from your p.c. using the V.I. Image Master library.
- Stores up to 16 reference images - one pattern at 16 different rates, or 16 patterns at one rate, or any combination in between.
- Monochrome and RGB color video.
- External synchronizing pulses.
- Small, light, portable.

**Affordable
\$1,695.00**

V.I.
Video Instruments

2155 Bellbrook Avenue • Xenia, OH 45385-4043
Ph.: 800-962-8905 • 937-376-4361 • Fax: 937-376-2802
E-mail: sales@videoinstruments.com
Visit our Web Site: www.videoinstruments.com
Visa • Mastercard • American Express

Circle no. 15

Increase EMI/RFI Protection with DURALAN II™

**High Performance Windows,
Lenses and Filters**

- Laminated Within the Filter
- Various Conductors Available
- Abrasion Resistant Surface
- Anti-Glare Finishes
- Various Transparent Colors
- Contrast Enhancement



SILVER CLOUD
MANUFACTURING CO.
GRAPHICS AND ELECTRONICS

For additional information call 609/825-8900,
FAX: 609/825-8969, or visit our Web site at:
www.silver-cloud.com

Circle no. 16

CRTs



from



IST



ist

**Imaging and Sensing
Technology Corporation
Headquarters**

300 Westinghouse Circle
Horseheads, NY 14845
Tel: 607-796-4350
Fax: 607-796-4579
www.istcorp.com

Precision Performance,
Proven Reliability,
Consistent Quality.

**IST CRTs perform to
the highest standards
in a diverse range of
customer applications.**

IST and IST-CRT Scientific manufacture high resolution cathode ray tubes for military and industrial applications. Other specialties include the phosphor coating of RHEED screens and specialty substrates.

Major motion picture special-effects and other computer-generated graphics are recorded on film or other substrates in high resolution hard copy applications using IST-CRTs.

**ist crt
scientific**

IST-CRT Scientific
14746 Raymer Street
Van Nuys, CA 91405
Tel: 818-989-4610
Fax: 818-989-4617

Circle no. 17

Is the Measurement of Front-Projector Characteristics an Impossible Task?

A lot goes on between the projection lens and the eye that projector manufacturers can't control, but it is possible to make accurate front-projection-display measurements in stray-light conditions – if we're careful. This is the third in a series of articles from NIST.

by Paul A. Boynton and Edward F. Kelley

SPECIFICATIONS of electronic projection displays such as contrast ratio are often based on measurements made in ideal darkroom conditions. But everyone does not have access to a facility that provides such conditions. Stray light from sources in the room, both direct and reflected off surfaces such as walls and tables, as well as back-reflections, contribute to the measured value and give an inaccurate indication of the projector's light output. So how can we verify that the projector that we have purchased is operating according to its specifications?

Leveling the Playing Field

When measuring front-projection displays – those in which the screen is not an integral part of the system – the goal is to establish the intrinsic characteristics of the projector, independent of the screen and viewing room. This

Paul A. Boynton is an electronics engineer at the Flat Panel Display Laboratory at the National Institute of Standards and Technology (NIST), Bldg. 22, Room A54, Gaithersburg, MD 20899; telephone 301/975-3014, fax 301/926-3534, e-mail: boynton@eel.nist.gov. Edward F. Kelley is a physicist and project leader at the Flat Panel Display Laboratory at NIST; telephone 301/975-3842, fax 301/926-3534, e-mail: kelley@eel.nist.gov. This article is a contribution of NIST, Technology Administration, U.S. Department of Commerce, and is not subject to copyright.

allows for a more accurate comparison of the display quality of different projectors. Minimizing the effects of ambient light achieves "a level playing field."

What we see in a typical front-projection environment is more than simply the performance of the projector (Fig. 1). In a typical user environment, a projector is set up and an image is projected onto a screen. The observed quality, however, depends not only

on the projector performance, but also on the reflective properties of the screen and the surrounding environment, as well as any ambient-light sources.

If we wish to quantify what the viewer observes, then we must account for the stray light falling upon the screen and for screen gain. These are not trivial tasks, and because the environment affects the displayed image they do not necessarily provide useful infor-

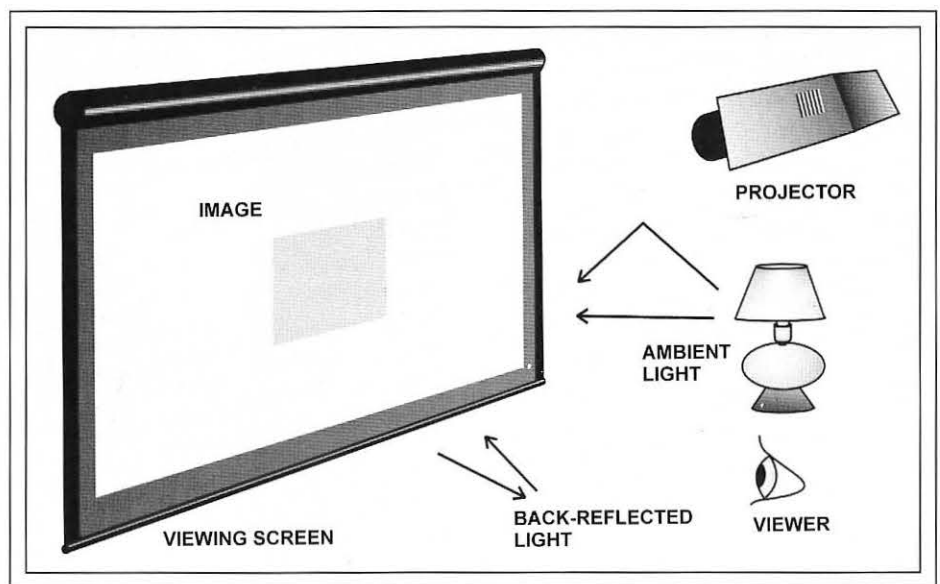


Fig. 1: The quality of the image we see in a typical front-projection environment depends not only on the projector performance, but also on the reflective properties of the screen and the surrounding environment, as well as any ambient-light sources.

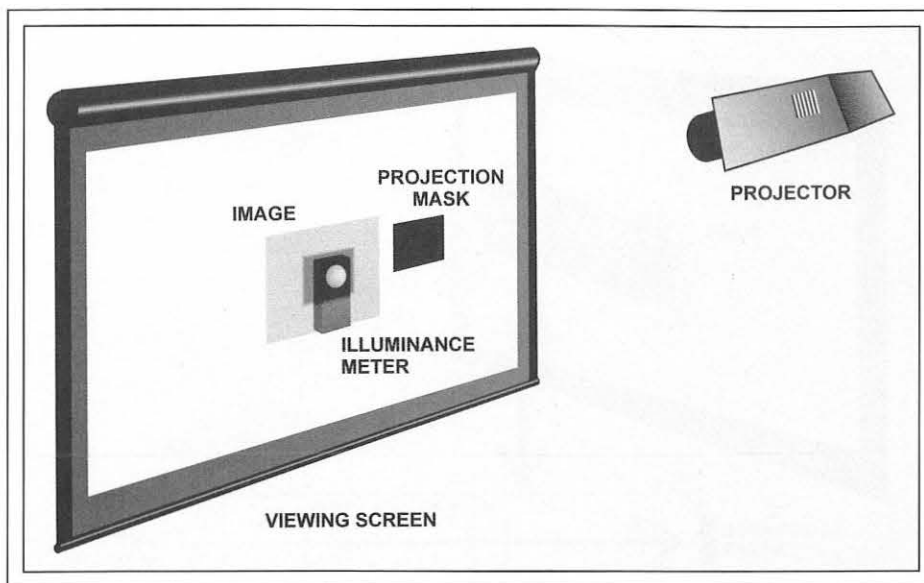


Fig. 2: By using a black projection mask to eclipse the projected light, an illuminance meter will indicate the approximate amount of stray light illuminating the detector.

mation about whether a particular display performs according to specifications or how it compares with other displays. Use of a black screen would reduce back-reflections, but we might still need to contend with other stray-light sources. The use of a simple black mask – called a projection mask – will provide us with the compensation we need to assess our display without corruption from stray light.

Using a Projection Mask

Let's assume we want to measure the luminance of a black rectangle on a white background, with the black rectangle being 25% of the screen size, based on diagonal measure (Fig. 2). The light output at the center of the rectangle in the image plane of the screen is measured with an illuminance meter. This measurement includes contributions from any stray light. Next, a black mask is placed less than 1 m away from the screen such that the projected light striking the screen and the illuminance meter is eclipsed. With this projection mask in place, the illuminance meter, placed in the image plane of the screen, will provide a reading that indicates the approximate amount of stray light illuminating the detector. By subtracting this value from the first measurement, a more accurate value of the black luminance of the projected image is obtained.

The size and distance of the projection mask can have a substantial effect. For our tests, the optimum distance of the mask from the projection screen was between 30 and 50 cm, but this can depend upon the room and projector configuration. If the projection mask is placed too near the screen, it will obscure some of the reflected light. If too far away, the diffraction around the mask and forward scattering by dust particles in the air may contribute to the measurement. To be safe, the projection-mask size is kept no smaller than the diameter of the projection lens to ensure that the projector is effectively eclipsed. Of course, the mask must be larger than the measurement area.

The projection mask can be mounted on a floor stand with rods, suspended from the ceiling with string, or by any other suitable means. Whatever method is employed, the mask must be held steady and parallel to the image plane. If a stand is used, it should be covered with black felt to minimize reflections that would interfere with the measurements.

Stray-Light-Elimination Tube

A second, more complex approach involves using a series of glossy black cones inside a glossy black tube (Fig. 3). The projected light enters one end of the tube, which has a 15-cm

inner diameter. An illuminance meter is placed at the other end of the tube, 61 cm away. Four cones are placed in opposing pairs, while a shallow fifth cone surrounds the meter. The apex angle of the cones should be 90°, *i.e.*, 45° on each side of the symmetry axis of the cone.

The projected image is focused onto the meter. Any stray light entering the tube will be reflected away from the detector surface by the cones; hence the name, stray-light-elimination tube (SLET). For extreme conditions, such as a room with overhead lights switched on, this method is preferred because it eliminates a great deal of stray light. Using the SLET, we have obtained the same results (within 1%) with room lights either on or off. The SLET is still in its evaluation stage but was used to verify the projection-mask method for this article.

Halation and Contrast

To demonstrate the effectiveness of these methods, as well as to indicate the seriousness of back-reflections, we projected a series of halation images – a black rectangle on a white background – onto a white screen using a liquid-crystal-display (LCD) projector with a metal-halide lamp. The laboratory walls, ceiling, floor, furniture, and equipment were painted flat black, covered with black felt, or manufactured with black material.

The black rectangle was varied from 5 to 100% of screen size (linear size based upon the screen diagonal), and the black-luminance level was measured and plotted against rectangle size. The black-luminance level decreases with increasing rectangle size (Fig. 4), but the level varies less dramatically if back-reflections are taken into account. The SLET and the projection-mask methods produce similar results.

Halation refers to light from bright areas of an image leaking into dark areas. An example would be the internal reflections between the front glass of a cathode-ray-tube (CRT) display and the phosphor surface. The increase in the black luminance with decreasing box size after making corrections for stray light is probably due to the veiling glare from the projection lens. (Veiling glare is a result of light scattering and reflecting at lens surfaces, at imperfections in the glass, at soiled areas on the glass, and at the barrel and other mechanical parts of the lens.)

display metrology

Another common projection-display measurement is the contrast ratio of a 4×4 checkerboard pattern at 16 points (Fig. 5).^{1,2} The illuminance at the center of each rectangle is measured, and the average of the white levels divided by the average of the black levels gives one measure of contrast. Our results show a 34% improvement in the contrast measurement when using the projection-mask method.

What About Luminance Measurements?

So far, we have only discussed measurements using an illuminance meter. Using a luminance meter poses a more difficult problem because we must now consider the reflective properties of the screen and the veiling glare of the light-measuring-device (LMD) lens (Fig. 6). Many screens direct or "shape" most of the projected light back in the direction of the viewer more than a perfectly white Lambertian surface would. Such shaping is called "screen gain" and can be defined as the ratio of the luminance of the screen at a specific point (usually center screen) to the luminance of a Lambertian diffuser placed at the same point on the screen.

However, when considering stray light, we must realize that the screen's reflective properties are rather complicated. The reflected light measured from the screen depends upon the incident angle of the various light sources (such as the projector, room lights, and reflections), the viewing angle of the measurement, and the reflection properties of the screen surface. [A general way to express this reflection is through the bidirectional reflectance distribution function (BRDF), a rather complex measurement.³]

Ideally, we can avoid the screen issue altogether. Using a nearly perfectly white Lambertian standard at each measurement point in the image plane would provide an accurate measurement unaffected by screen gain. Thus, measuring the luminance of the white standard with and without the projection mask, and taking the difference, will provide us with a measurement point corrected for reflections. Because the surface is Lambertian, the angle of measurement can be slightly off-axis with negligible error.

We can take advantage of the diffuser's properties to convert from a luminance measurement (in cd/m^2) to illuminance measure-

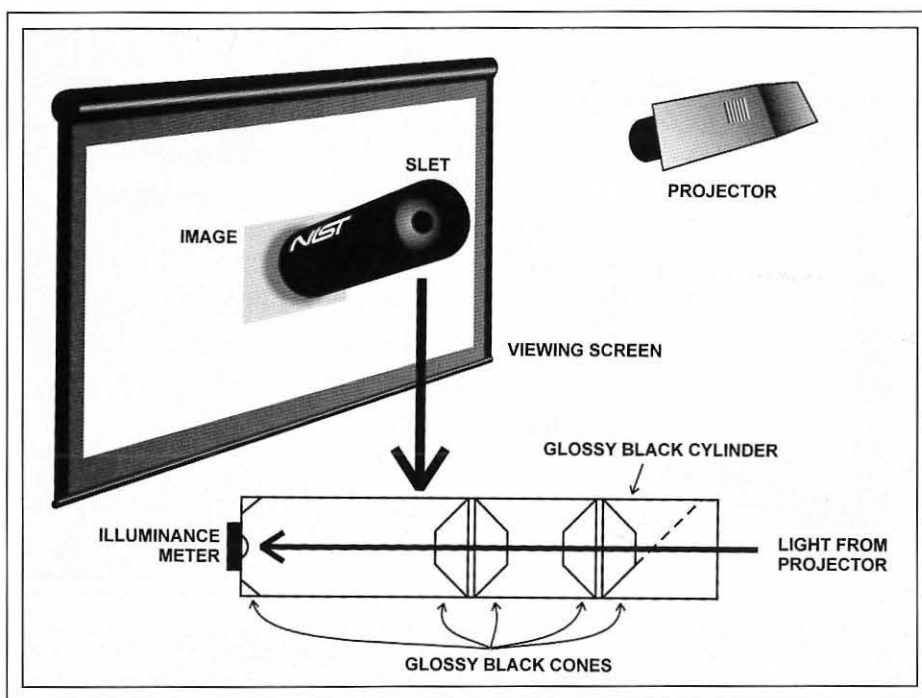


Fig. 3: A stray-light-elimination tube (SLET) is a more complicated device than a projection mask. But for extreme conditions, such as a room with overhead lights switched on, this method is preferred because it eliminates a great deal of stray light.

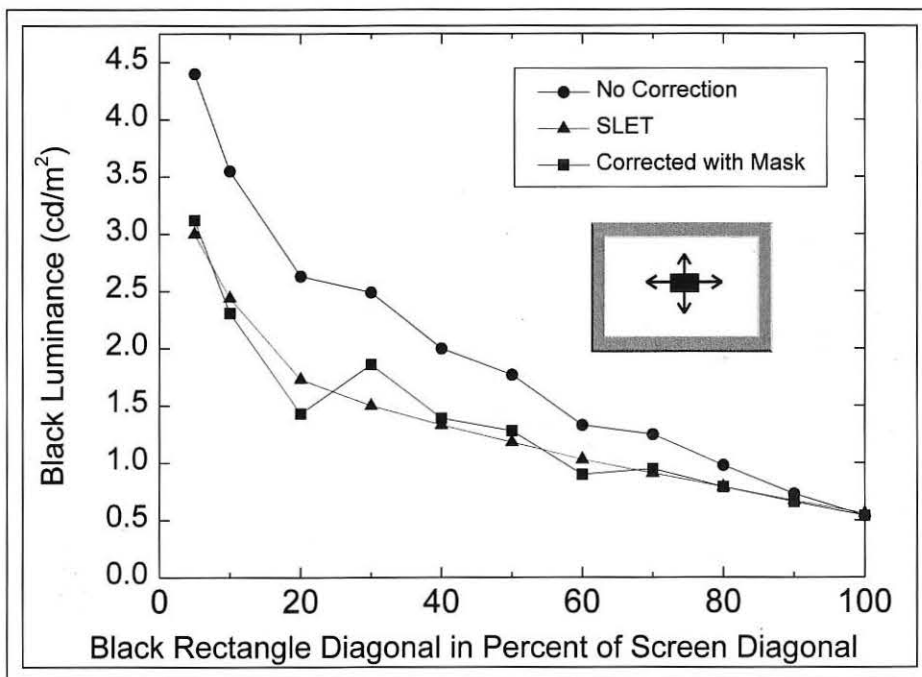


Fig. 4: As the size of the black rectangle in a series of halation images increases from 5 to 100%, the black-luminance level appears to decrease, but the level varies less dramatically if back-reflections are taken into account. The SLET and the projection-mask methods produce similar results.

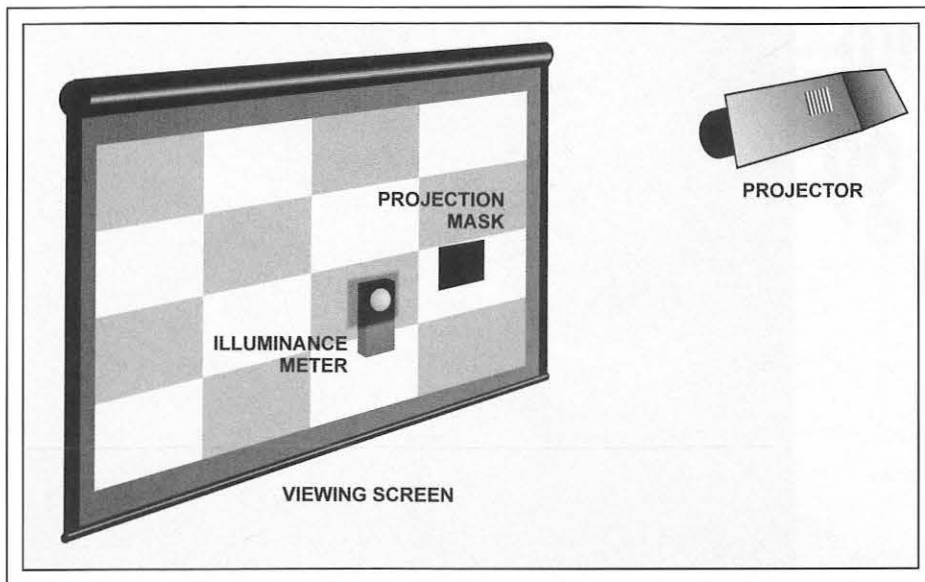


Fig. 5: Using a projection mask produced a 34% improvement in a contrast measurement made in our laboratory.

ments (in lm/m^2 , or lux). By using the simple relationship $L = (\rho/\pi)E = qE$, where ρ is the fraction of light reflected from the surface (luminance factor), and $q = \rho/\pi$ is called the luminance coefficient. This equation is only valid for a Lambertian reflector. Materials with $\rho \geq 99\%$ can be obtained.

Because we are subtracting two measurements with the same surrounding background, any veiling-glare contribution from the LMD lens will cancel out. However, if we wish to make an absolute measurement with stray light included, then some technique must be employed to minimize this glare. We can accomplish this using a black cone mask with an apex of 45° .

The cone mask is placed in front of the LMD such that the outer (larger) diameter faces the LMD and prevents any light from the display from reaching the LMD lens. The inner diameter (aperture) should be small enough to keep out stray light but large enough to prevent vignetting between the LMD aperture and the aperture of the cone. This cone mask has been used to improve the measurement of black luminance of direct-view transmissive displays by reducing the effect of veiling glare in the lens of the measuring instrument.⁴

If we wish to determine the veiling-glare contribution of our LMD lens, we can place a glossy black mask across the black image, tilt-

ing it slightly if necessary to eliminate specular reflections from the projector. We must be sure the mask displays only reflections from a dark area of the room, from a light trap, or from some other essentially black reference. The measured luminance of this mask gives an indication of the degree of veiling glare in the LMD.

Other Precautions

Although many readers may find them obvious, we'll mention a few other precautions. Illuminance measurements can be sensitive to deviations off the normal axis. In our measurements, a 3% error resulted from a 10° misalignment of the luminance meter's axis with the screen perpendicular. This sensitivity is a function of distance from the source - the closer to the projector, the more important normality becomes.

Room reflections and other stray-light sources may increase this variability. Varying the distance of the detector from the projector also changes the illuminance. As the distance of the detector from the projector increases, the illuminance decreases at a rate of $1/r^2$, where r is the distance from the projector (inverse square law). So, if $r = 3$ m, then a 10-cm error in the placement of the illuminance meter represents a 0.7% error in the illuminance measurement. If the operator must hold the instrument in the image plane

for the duration of the measurement, then care should be taken to avoid reflections from the operator's face, arms, hands, and clothing. Standing as far off to the side as possible and wearing dark clothing will help to minimize such contributions. Finally, we must be sure that the mask or the projected image of interest completely covers the detector surface or completely covers the measurement aperture.

Take Nothing for Granted


As in all measurements, take nothing for granted. If in doubt about whether the viewing room produces back-reflections onto the screen, try using the small black projection mask and determine how much stray light contributes to the measurements (if at all). We certainly found stray-light contributions in our darkroom environment. Straightforward techniques, such as those described in this article, are simple to implement and will help provide assurance that we are accurately characterizing our projection display.

References

- ¹ANSI/PIMA 177.228-1997, "American National Standard for Audio-Visual Systems-Electronic Projection - Fixed Resolution Projectors."
- ²ANSI/PIMA 177.228-1998, "American National Standard for Audio-Visual Systems-Electronic Projection - Variable Resolution Projectors," Draft 5.
- ³E. F. Kelly, G. R. Jones, and T. A. Germer, "Display reflectance model based on the BRDF," *Displays* 19/1, 27-34 (June 1998).
- ⁴P. A. Boynton and E. F. Kelley, "Accurate Contrast Ratio Measurements Using a Cone Mask," *SID Intl. Symp. Digest Tech. Papers*, 823-826 (May 1997). ■

SID '99

San Jose, California
San Jose Convention Center
May 16-21, 1999



Plan Now to Attend! Display Works® 99

The Only Display Event
Focused on the Business
and Technology of Display
Manufacturing

Exposition:
February 3-4, 1999

Conferences and Events:
February 1-5, 1999

San Jose
Convention Center
San Jose, California

For full agendas,
discounts on programs
and events, and FREE
admission to the
exposition, visit
www.displayworks.org.
Register by January 12
and save \$\$!



Discover State-Of-The-Art Developments in Display Manufacturing at Display Works 99

Display Works 99 is a one-of-a-kind opportunity developed to expand your technical and business expertise. Display Works 99 features:

- World-class exposition
- Manufacturing Technology Conference—*The Technology of Display Manufacturing*
Technical sessions include:
 - Lithography
 - Thin Films
 - Manufacturing Yield
 - Drivers & Interconnects
 - CRT Manufacturing
 - Substrates
 - FPD Impact
 - Environmentally-Conscious Manufacturing
- Business Conference—*Display Applications for the New Millennium*
Keynote speakers include:
 - John Vrolek, Senior V.P., Silicon Graphics
 - John Medica, V.P., Dell Computer
 - Julie Chen, V.P., Primeview International
- FPD Standards Meetings
- Educational Seminars
- SID Evening Panel Discussion
- Rugged Display Roundtable
- VESA MicroDisplay Special Interest Group
- Material Handling Workshop
- FPD Technology & Market for Investors Seminar
- Environmental, Health & Safety Interest Group Meeting
- CIM Software & Automation Course
- FPD Industry Dinner

To exhibit, call Brian Santor at SEMI, 650.940.7992 or, e-mail your request to bsantor@semi.org. To attend Display Works 99, visit www.displayworks.org.



Ten reasons to go with MicroJoin:

1 All-Ceramic Hot Bar*

MICRO JOIN PATENTED TECHNOLOGY

- Superior thermal uniformity
- Superior planarity (flatness)
- No voltage or current transferred to parts or traces

2 Computer Controlled Temperature & Pressure

- Precise repeatability
- Reduce process variation
- Software configurable for ACF heat seal or solder applications

3 Automated Vision System*

- Speeds alignment task
- Improves accuracy & repeatability
- Fine pitch <90 micron capability
- **NEW!** Upper or lower cameras available

4 Process Development

- Auxiliary thermocouples for quick thermal characterization of bond area
- Data acquisition for reports and quality assurance
- View & plot real-time process values

5 Graphical User Interface*

- Simplifies high mix process
- Easy to learn
- Easy to use
- Graphical diagnostic tools for easy trouble shooting

6 Universal Glass Transport

- Accommodates wide variety of glass panels
- Recordable, repeatable settings for quick product change over
- Migration path for panel sizes up to 60 inches

NEW!

9 Ergonomic Operator Features

- Dual start sensors for safety and ergonomics
- Track ball
- Sliding keyboard tray for seated operation

8 Selection & Service

- More price performance options
- More automation options
- Factory installation assistance available
- Technical and application engineering support

7 Customized Fixtures

- Optimize efficiency & quality of volume production
- Universal TAB vacuum fixtures to minimize tooling for low volume production
- Precision alignment of <90 micron TAB pitch

10 Security

- Key lock & software password protection
- Two levels of software name/password security
- Eliminate unauthorized access or changes
- Control profile and process sequence revisions

MicroJoin's Flat Panel Display Workstations

offer you exclusive design features that provide the most effective and profitable flat panel repair, rework operations, high-mix production and prototyping.

Our hot bar is all-ceramic which ensures consistent temperature and pressure across the bond surface. A universal glass stage means you get faster and more accurate product change-over from panel to panel.

More models to choose from, more industry-specific features and more application experience than any other vendor makes MicroJoin the manufacturer of choice for the flat panel industry. Contact MicroJoin today, and find out how we contribute to the success of our customers world-wide.

(619) 877-2100

**micro
Join**
A Palomar Technologies Company

13535 Danielson St.
Poway, CA 92064
Fax: (619) 877-2110
E-mail: sales@microjoin.com
Web: <http://www.microjoin.com>

*On selected models

display continuum

continued from page 4

Dear Mr. Silzars:

A friend in CRT manufacturing handed me a copy of "The Display Continuum" for April/May. I am in the photographic retail and photo finishing business, and

have been for nearly 30 years. Your comments about electronic photography are of great interest to me.

In closing your article you state, "The biggest mistake I think most technology

forecasters make is to assume that once a new technology is developed its acceptance is a given." I suggest that you should apply this caveat when considering the future of photography. From my perspective, there are two great obstacles to the digital photography revolution. The first and most obvious is the basic laziness of the consumer. Granted, for the professional, digital is the direction photography should and will head. However, the amateur is a long way from being willing and interested in sitting down at the computer and making prints from his 100 or so vacation photos. Even printing a dozen or so photos may require more time than they are willing to expend.

The second issue is subtle, but may prove to be the most important. It has long been an old story that when a house catches fire, the owner rescues his family first, pets second, and his family photos next. Every time you snap a picture, you are capturing a memory for the future. You are archiving. We reprint negatives and restore photos taken from as long ago as the turn of the century. We also print pictures taken only minutes ago. All these pictures are in many different formats, but are stored on film. We can easily make good quality prints from virtually any format. Can you read the files you prepared on your computer 10 years ago? Can you find them? What if you accidentally hit the delete button when cleaning up your hard drive? It is one thing to lose an old correspondence or spreadsheet, but how about the pictures of your children growing up? That is another matter.

When the Polaroid was introduced, many believed that it would replace conventional photography. That was not the case. The digital camera is in many ways the Polaroid of the next millennium. It is good for some uses, but totally inappropriate for others. You may still be right, though. Perhaps in the next 5 years 50% of all photos taken will be with digital cameras. I hope and believe, however, that the pie will become so big that those 50% of all photos will be in addition to

300MHz Video Test Generator




Unigraf VTG-1300

High-performance Video Test Generator on a board

As the other Unigraf video test generators, VTG-1300 comes loaded with features and backed by extensive software support

- Pixel frequency up to 300 MHz
- Fully programmable
- Fast bitmap patterns
- 255 colours, 16.7 million shades
- 2k x 2k x 8 VRAM
- DDC1 and DDC2 support
- Very fast software response
- Full ATE support

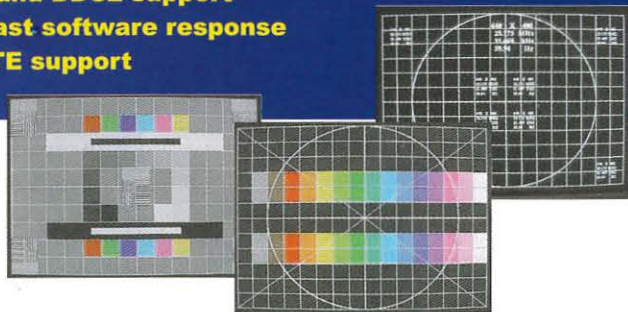

VTG-1300 is the latest addition to the family of High-performance Video Test Generators from Unigraf. The 300 MHz pixel frequency enables 1800 x 1440 display resolution at 85 Hz and above. Fast software response makes the VTG-1300 an ideal choice for ATE systems. It is full of features like DDC1/DDC2, fast bitmap patterns, 255 simultaneous colours and a powerful software support for both DOS and Windows including drivers for Windows 95 & NT 4.0.

 **UNIGRAF**
ISO 9001 CERTIFICATED FIRM

UNIGRAF Oy, Ruukintie 18
FIN-02320 Espoo
Finland
Tel. +358 9 802 7641
Fax + 358 9 802 6699
<http://www.unigraf.fi>

silver halide, not as a replacement.

– Brad Lundgren
Lundgren Photo
991 S. Perryville Road
Rockford, IL 61108
blundgren@aol.com

Well, what about it? Television didn't replace movies, video conferencing hasn't yet had measurable impact on business travel, and the idea of the paperless office now sounds pretty silly. Is digital photography just another technology-driven gadget that will only supplement "real" photography in certain specialized applications?


As all of you know, my tendency is to approach new technologies with considerable caution and skepticism. I agree with Mr. Lundgren that often the technologists ignore what the customer is really after. Are the digital formats to be trusted when we think in terms of 50 or more years of family memories? The formats may change with time, but at least with film the image is always retrievable and printable as long as the film materials hold out. But even here, there are some well-documented cases of film that was put on the market that couldn't hold an image for much more than about 10 years. The early color negative films made by Kodak were especially bad for losing their images – sometimes known as the "lost decade" among professional photographers. Today's color films can be considered archival for periods exceeding 50 years if the right brand of film is selected and if reasonable care is taken with its post-processing storage.

So far we have good cause to worry about storing our archival information on digital media. The 5¼-in. floppy-disk format lasted for only about 5 years. The 3½-in. disk has done somewhat better, but now the new Macintosh computers don't have a floppy drive. If you have an image stored on a floppy disk, how are you supposed to read it into your new iMac computer? Is having to purchase an external

disk drive the start of some new trend, and, therefore, does it mean that we really should be concerned about the future readability of information in which we may

have long-term interest? (And that, of course, applies to more than just photos.)

In spite of these reservations, I am going to make the bold prediction that

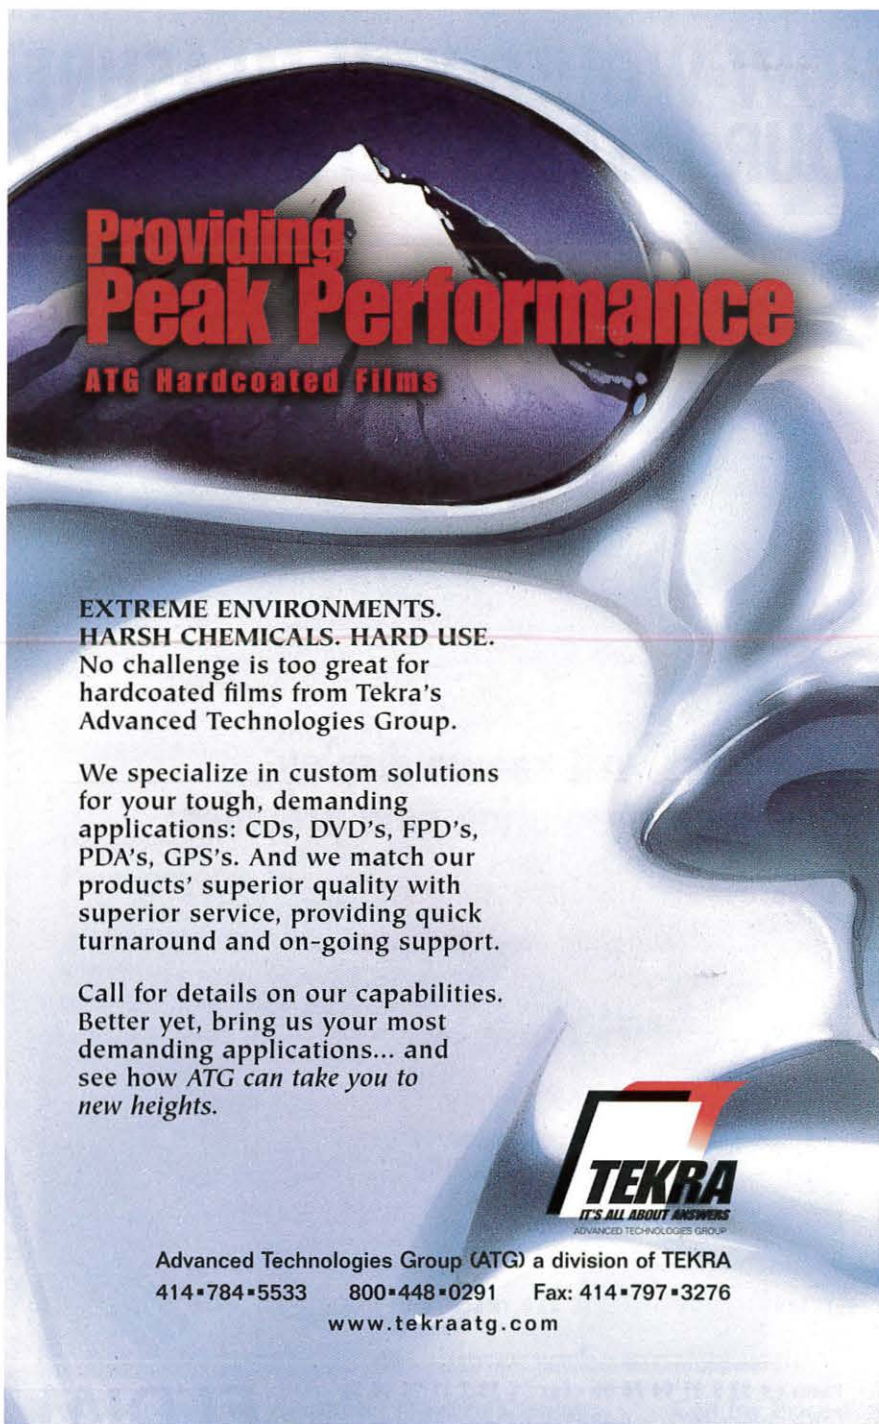


**Providing
Peak Performance**
ATG Hardcoated Films

**EXTREME ENVIRONMENTS.
HARSH CHEMICALS. HARD USE.**
No challenge is too great for
hardcoated films from Tekra's
Advanced Technologies Group.

We specialize in custom solutions
for your tough, demanding
applications: CDs, DVD's, FPD's,
PDA's, GPS's. And we match our
products' superior quality with
superior service, providing quick
turnaround and on-going support.

Call for details on our capabilities.
Better yet, bring us your most
demanding applications... and
see how ATG can take you to
new heights.



Advanced Technologies Group (ATG) a division of TEKRA
414•784•5533 800•448•0291 Fax: 414•797•3276
www.tekraatg.com

Circle no. 21

display continuum


digital photography is going to be the "third wave" in computer-technology evolution. The first wave was the development of the PC itself. Most of us would identify the birth of the Informa-

tion Age with the IBM PC and the Apple IIe. It's interesting to think back how many failed attempts there were to try to make the PC a "useful" home appliance. Not only were we going to do word-pro-

cessing and spreadsheets, but we were going to play all kinds of mentally challenging games on our computers, keep detailed personal financial records, manage our grocery lists, and control our home heating systems and kitchen appliances. Well, the word-processing function and the spreadsheet survived pretty well, even though these were not considered as sufficient justification for having a home computer. A few database functions such as address lists and specialized small-business-management programs also turned out to be handy. But at least half of the laptop computers I see lit up on airplanes these days are being used to play solitaire. So much for using the computer to challenge the intellect!

The second wave has been the Internet. This function was not anticipated by *any of the brilliant minds* trying to come up with relevant uses for the early PCs. It evolved from a number of initially unrelated events. But once a few clever users figured out that the Internet could be accessed from their PCs, everyone wanted in. The Internet introduced a powerful communications capability to the PC. And this has been the giant driving force for many people to become computer-literate who otherwise would have ignored PCs. Internet-connected PCs create a communications medium that does not replace the telephone, or the fax, or even conventional mail, but which facilitates a whole new and virtually cost-free worldwide communications capability. It's personal, but not as personal as the telephone. I can give you bad news by e-mail easier than by a personal call. I can send a little or a whole bunch, but if I want you to see certain kinds of information in a certain way, I may still want to use a fax or even the mail, including an overnight service. I can search for information such as stock quotes and other time-dependent data, and I can do it better via the Internet than by any other means. However, if I want lots of details, or if I'm not sure what I'm looking for, a trip to the bookstore or the library may still serve me better.

HOW WOULD YOU MEASURE YOUR DISPLAY REFLECTIONS?

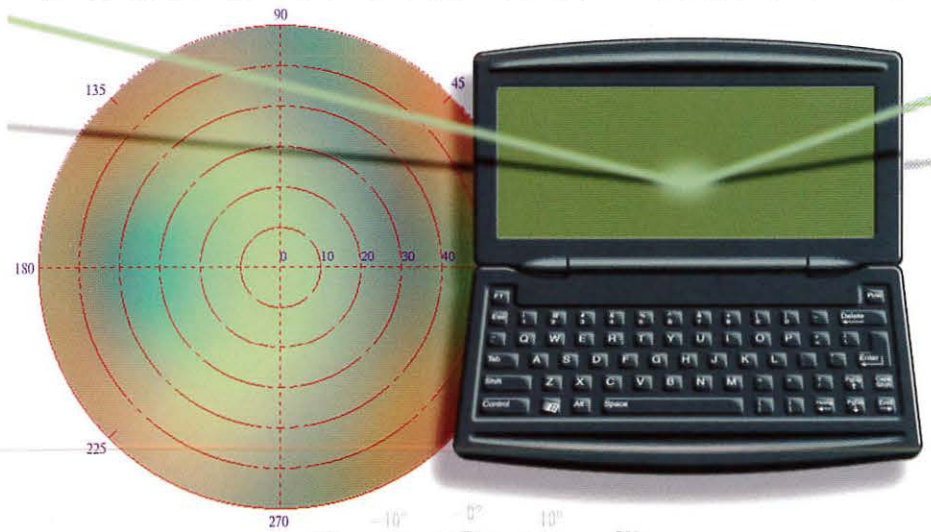

EZContrast well known display measurement solution now provides:

- > Diffuse illumination measurements
- > Specular illumination measurements
- > BRDF analysis
- > Automatic angular dynamic adjustment

Over $\pm 80^\circ$ incidence, $0-360^\circ$ azimuth angle while maintaining a measurement speed of less than **1 mn** for luminance measurements.

Compatibility with main display characteristics measurement standards (ISO, VESA...).

ELECTRONICS FOR DISPLAYS AND IMAGING DEVICES

1185 rue d'Epron 14200 HEROUVILLE SAINT CLAIR - France

Phone : + 33 2 31 94 76 00 - Fax : + 33 2 31 94 09 50

E-Mail : eldim@eldim.fr - Internet address : <http://www.eldim.fr>

Circle no. 22



© ELDIM SA - 1998 / Avg0100 - V2.0

Because of the Internet, stock-market players, collectors, job seekers, and all that ilk of worldwide merchants and communicators have had to improve their typing skills, whether they wanted to or not. And they have had to learn how to left-click and right-click, and to move that little pointy-thing all around the screen. As a consequence, the world of the personal computer has expanded manifold.

Now, I predict that the third wave will be full-color imaging, and it's almost upon us. Within this, I include image acquisition, image manipulation, image storage, image reproduction, and image transmission.

The change will first be driven by professional users and then will be immediately followed by younger (all school ages, including college) computer users. The multiplicity of professional uses have already been evolving for several years and include everything from technical reports to news stories, real-estate brochures, and high-quality archival storage and retrieval. The younger generation will appreciate digital imaging because it will give them the ability to communicate with their friends by pictures in addition to words, the ability to manipulate images (enhancing their appearance, for example), and the potential for quick results (instant gratification). Ultimately, the new technology will create some new and as yet unanticipated changes.


Should we, therefore, conclude that Kodak, Fuji, and other film and photographic-paper makers should plan their orderly demise and think in terms of how many more years they can survive before they close their doors? I don't think so. Just as the Internet has not and will not replace the phone, fax, or FedEx, digital imaging will not replace some film uses for many years to come. Consider, for example, that even digitally produced images are often most conveniently put onto 35-mm slides, especially if it's for a presentation to a large audience. Or consider the scenario of photos from an extended vacation. For this situation, I

would agree with Mr. Lundgren. The easiest way to look at them is to first get them all printed using conventional chemically based processing and then to do a sorting from the hard copies. Putting hundreds of images onto a PC and then taking the time to bring each one up and look at it without having the ready comparison with the others would indeed be a frustrating task.

What we consumers really want is to be able to choose the image-capture medium we find the most convenient for a given situation, and then to be able to convert it to whatever other medium we may want for our subsequent enjoyment - film to disk, disk to CD, digital-camera module to disk, CD or disk to film, and so forth. All media are fine for us as long as we can acquire, manipulate, store,




print, and transmit our favorite images. And multiple formats are great for that extra assurance that the images we really care about won't be lost.

Oh, how our past comes back to haunt us! Some years ago in this column, I passed on to you the words that "Displays are windows to the Information Age." And here we are, limited in our ability to view multiple images by having too small a "window." Oh, sure, you could argue that it's possible to put up more than one picture at a time by dividing up the monitor screen into segments, but that all sounds like so much more effort than spreading a bunch of photographs, maybe a hundred or more, all over the dining room table. Which would *you* rather do? By the way, your answer might not be the same as mine. Would bigger and higher-





KLEIN Instruments Corporation

KLEIN VPG 250
Stand-Alone Pattern Generator

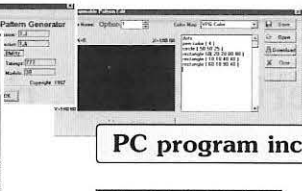PC program included

- **Programmable Timings (500)**
- **Programmable Sequences (30)**
- **User Programmable Patterns**
- **2048 x 2048 pixel resolution**
- **999.9 Hz max Vertical frequency**
- **999.99 KHz max Horizontal freq.**

Test Equipment for Computer Monitor Displays
ph: 503-245-1012 • fax: 503-245-8166 • www.kleininc.com

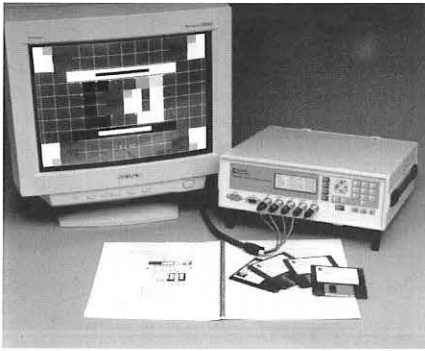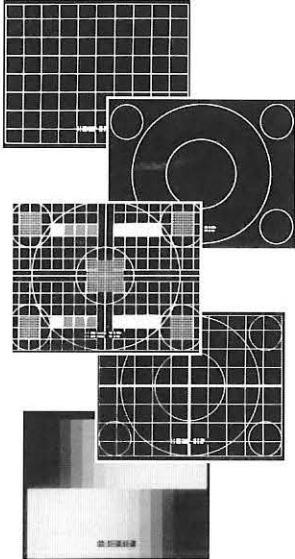Call for Prices!
Portland, OR USA

display continuum

resolution displays solve this problem? Not all that well, it seems to me.

Do you remember 8-mm home movies? It sure didn't take long for the video camera to replace those. However, at the professional level, where image quality is important, film continues to be used. What about the quality of digital images? How do current digital-camera images compare with 35-mm-film photographs? At the one-megapixel level, which is typical for the majority of today's consumer cameras, they are not as good. A carefully made 35-mm photograph is equivalent to about a 2-megapixel digital image. A good-quality 35-mm-film-based photograph can be enlarged to an 8 × 10-in. image or occasionally even an 11 × 14-in. image without showing significant grain or lack of sharpness. The current one-megapixel digital cameras look comparably good at printed-image sizes of about 5 × 7 in. However, I would expect parity

to be achieved within the next two to three years, when we begin to see two-megapixel cameras at a selling price of under \$1000 (comparable to typical full-feature 35-mm cameras).

Consumer-affordable printing technology is similarly not yet quite as good as chemically based photography, but it's also getting closer, and we will be at parity within about 3 years. However, for many consumer and even commercial applications parity is not required. Newspaper photos, real-estate and other advertising brochures, and technical-report images do not need the ultimate large-format image quality. A 4 × 6-in. photo is typically all that is needed. The current digital cameras can do those instantly and, to the casual user, with quality indistinguishable from 35-mm photographs.

The younger set just wants to do interesting stuff and have fun doing it. They are typically more willing to try new things

even if the new technology doesn't meet every quality criterion of the older technologies. If a reasonable-looking image can be put up on the computer screen, manipulated, printed, and sent to friends via e-mail, then let's just do it. In a few months, we'll do even better ones. That's the way the world works, doesn't it?

So the third wave of computer technology will impact us all. The professionals have already picked up on it through the various CAD programs that today pervade every field, from art to advertising, engineering, fashion design, news reporting, photography, publishing, and television. Now the rest of us will have our opportunity, with the younger generation picking it up the fastest.

The home computer with Windows95 or Windows98 and Internet access is already becoming a mature product. The third wave will build around this maturing capability by introducing the widespread use of input devices, such as digital cameras and scanners, and output devices, such as photo-quality color printers, color fax machines - and of course, bigger, brighter, and higher-resolution displays.

We display engineers have much to be thankful for this Holiday Season. We are going to be much needed to create the displays that will meet the expectations of the image-driven Information Age. What better present could Santa Claus bring us than to let us know that we will be in demand for years to come? With that, *I wish every one of you the best of Holiday Seasons and a coming year filled with great opportunities to apply your talents to creating great displays for future generations to use.*

Should you wish to send me your comments that perhaps could become the seeds of a future column, please provide them to me by the medium of your choice (since none of them are, so far, in any noticeable stage of decline). My e-mail address is silzars@ibm.net, my fax is 425/557-8983, my telephone number is 425/557-8850, and the post office seems to know that I am at 22513 SE 47th Place, Issaquah, WA 98029. ■


KLEIN Instruments Corporation

KLEIN CM7AG
Convergence Error Gauge

Superior clarity, right in the palm of your hand.

Only Klein Instruments has this finely calibrated, handheld instrument which measures convergence error between colors on CRT displays. It's easily manipulated to identify the degree of error, placing superior clarity right in the palm of your hand.

More information on Klein's advanced quality assurance products is just a phone call away. We'd love to hear from you.

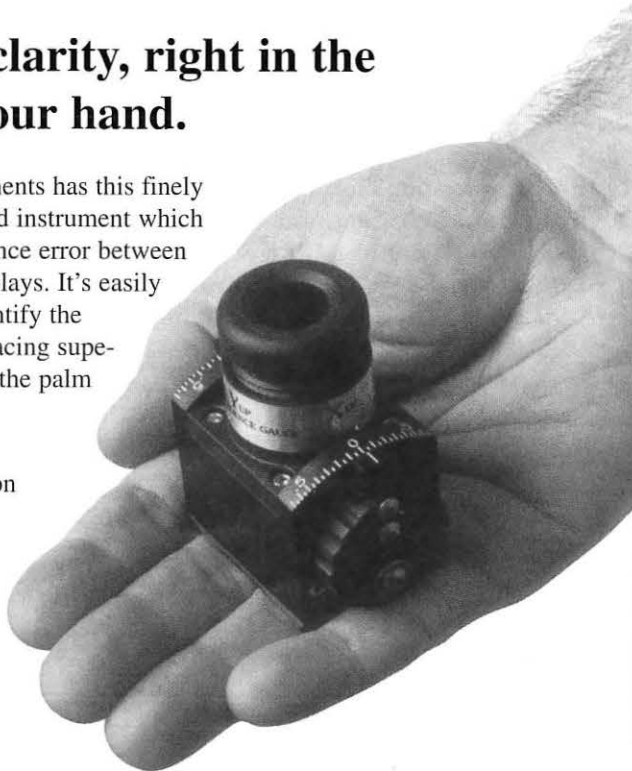

Test Equipment for Computer Monitor Displays

ph: 503-245-1012 • fax: 503-245-8166 • www.kleininc.com Portland, OR USA

SID Conference Calendar

Next Show!

Display Works 99: Manufacturing Technology Conference

A Vertically Integrated Exposition for the Electronic Display Industry

Display Works 99 is directed specifically to the world-wide electronic display industry. Display Works 99 incorporates a world-class exposition, leading technical and business conferences, key display meetings and social events in one convenient location. Display exhibitors from around the world (Japan, Europe, Korea, Taiwan and the United States) will show electronic displays, equipment, materials and components.

1 **99**

FEBRUARY

Display Works 99:
SAN JOSE, CALIFORNIA
FEBRUARY 1-5, 1999

- An international conference addressing all aspects of Display Manufacturing including:
 - Flat Panel and CRT Manufacturing
 - Display Materials
 - Manufacturing Equipment
 - Cost Reduction and Yield Improvement
 - Industry Forecasts
 - Investor Presentations
 - International Standards

16 **99**

MAY

SID '99
SAN JOSE, CALIFORNIA
MAY 16-21, 1999

- SID's MAJOR ANNUAL EVENT
- An International Symposium, Seminar, and Exhibition - Featuring:
 - Technical Sessions - Poster Session
 - Author Interviews - Evening Panels
 - Short Courses - Applications Seminars
 - Technical Seminars - Applications Sessions
 - Product Exhibits - Display Technology Showcase

For additional information:
Dee Dumont
Society for Information Display
31 East Julian Street
San Jose, CA 95112
408/977-1013, fax - 1531
www.sid.org

6 **99**

SEPTEMBER

19th International Display Research Conference (Euro Display '99)
BERLIN, GERMANY
SEPTEMBER 6-9, 1999

- An international conference on display research and development aspects of:
 - Display Fundamentals, Display Devices,
 - Hard Copy & Storage, Input Systems,
 - Integrated Devices and Applications,
 - Image and Signal Processing,
 - Color Perception, Human Factors

8 **99**

NOVEMBER

Fifth International Conference on the Science and Technology of Display Phosphors
SAN DIEGO, CALIFORNIA
NOVEMBER 8-10, 1999

- An international conference on the future prospects of phosphors for:
 - OLEDs - ELDs - FEDs
 - CRTs - Plasma Displays
 - PL Devices - LC Backlights



Since 1962, a professional worldwide interdisciplinary society committed to the advancement of information display.

Reservation Housing Form

Society for Informational Display

May 16 - 21, 1999 - San Jose, California

PLEASE TYPE OR PRINT CLEARLY:

Use one (1) form for each room request.
Photocopy additional forms if necessary

Occupant Name _____

Sharing with _____

SEND CONFIRMATION TO:

Name _____

Organization _____

Address _____

City _____

State/Province _____ Zip/Postal Code _____

Country _____

Telephone _____ FAX _____

Arrival Date _____ Departure Date _____

Email Address _____

**Reservations will not be processed without a form of guarantee.*

Type of Card _____

Account # _____

Expires _____

Signature _____

Check (must accompany form in the amount of \$150 per room (payable to SJCVB) if credit card is not provided-FAX not acceptable.)

-No purchase orders will be accepted.

ACCOMMODATIONS:

Guest room reservations at the official hotels are handled on a first-come, first-serve basis. Requests for guest rooms should be faxed or mailed to the San Jose Housing Bureau. Failure to receive your first choice does not constitute an error. The bureau will accept only written reservations. Please provide your FAX number for a faxed acknowledgment. **No telephone reservations will be accepted through the Housing Bureau.** If accommodations are not available at the hotel of your choice, comparable reservations will be made at other participating hotels.

GUARANTEED RESERVATIONS ONLY:

All reservations must be guaranteed at the time of your request to the housing bureau. ***Reservations will not be processed without a form of guarantee.** You may do so by using a major credit card or sending in an advance deposit with your housing form. Your credit card is only a form of guarantee.

DEADLINES:

The housing bureau requests a response no later than April 17, 1999.

CHANGES & CANCELLATIONS:

To cancel or make changes to reservations, contact the housing bureau in writing only, up until the cut-off date of 4/17/99. All cancellations must be received by the assigned hotel at least 72 hours prior to arrival to avoid a cancellation fee. After 4/18/99 changes can be made directly with the hotel.

CONVENTION HOTELS:

HOTEL	1PRS	2PPL	3PPL	4PPL
❖ Fairmont Hdq.	\$146	\$156		
❖ Crowne Plaza	\$149	\$149	\$159	\$159
❖ Hilton & Towers	\$157	\$175	\$190	\$205
❖ Hyatt Sainte Claire	\$117	(limited availability)		
❖ Hyatt Sainte Claire	\$142	\$142		
❖ Hyatt Sainte Claire		\$155	(2 beds, 2 people)	
❖ Hyatt Sainte Claire	\$155	\$155	(1 King Bed)	
Hyatt San Jose	\$179	\$199	\$224	\$249
Doubletree	\$161	\$181	\$201	\$211
Radisson Hotel	\$169	\$169	\$169	\$169
Wyndham	\$169	\$169	\$179	\$189
Airport Inn Int'l	\$89	\$99	\$99	\$99
Best Western	\$70	\$70		
Best Western (2 bds, 2 people)		\$80	\$80	\$80
Hanford Hotel	\$134	\$144		

Note: These rates are subject to 10% occupancy tax.

❖Note: Within walking distance. (Other hotels are within 3-4 miles from the convention center.)

HOTEL PREFERENCE:

First Choice _____

Second Choice _____

Third Choice _____

TYPE OF ACCOMMODATION: (check one)

Single (1 bed, 1 person) Double (1bed, 2 people)

Double/Double (2 beds, 2-4 people)

Smoking Non Smoking

Require special facilities in accordance


with the *American With Disabilities Act.*

Return This Form To: Society for Information Display

P.O. Box 6299, San Jose, CA 95150-9828 or FAX **408/293-3705**

Housing Info Line Only: 408/295-2265 Ext. 423

E-mail: sid@sanjose.org

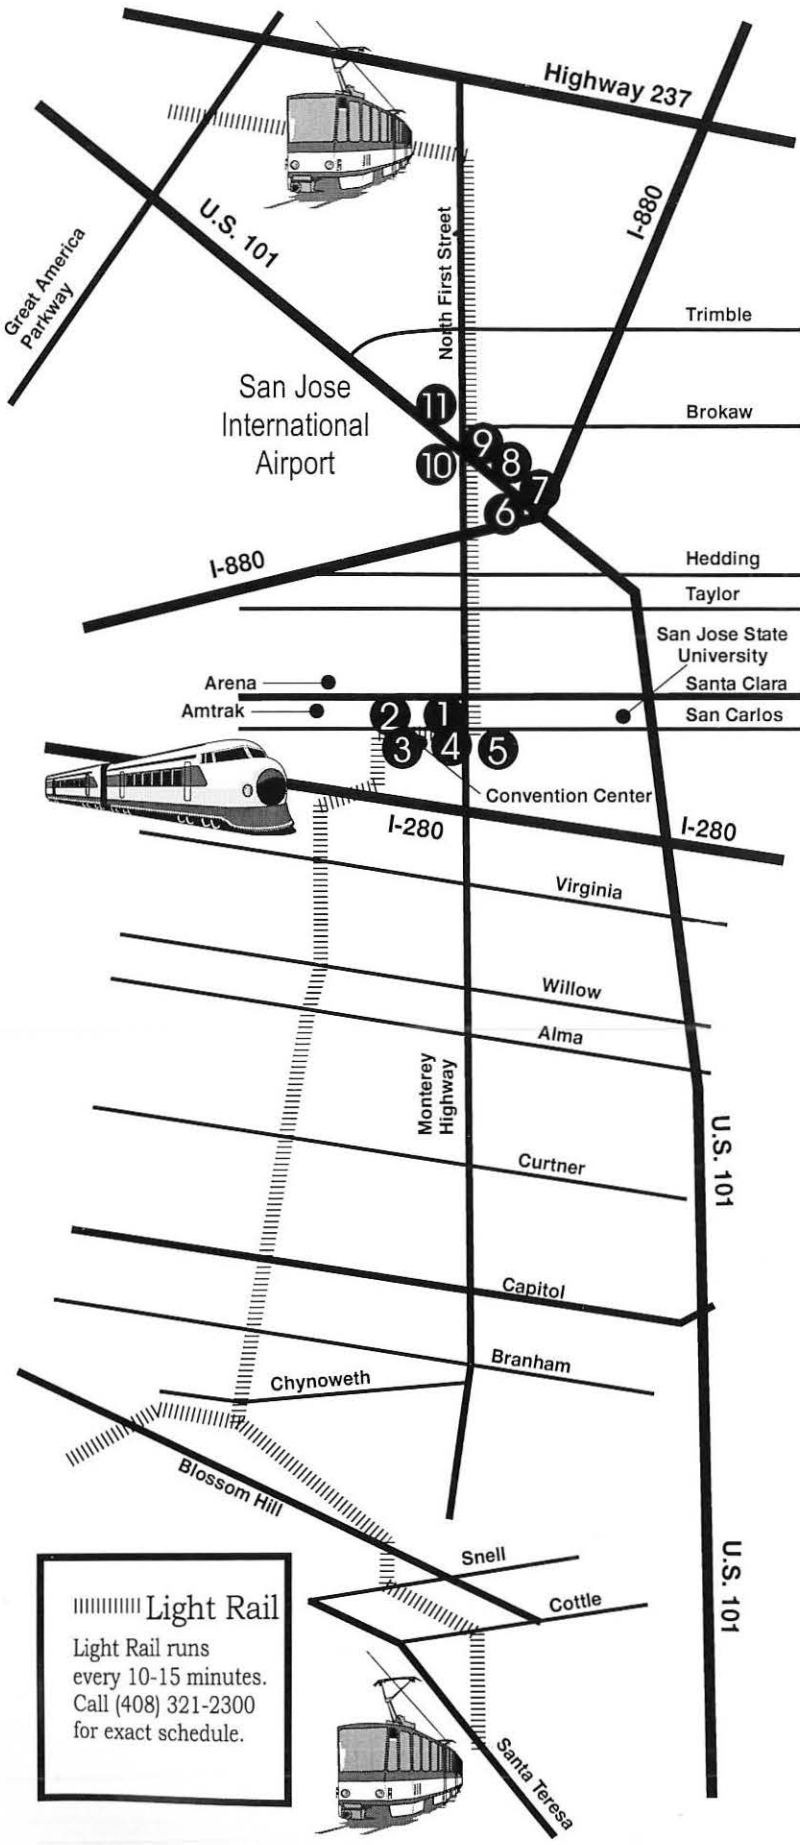

 Light Rail
 Light Rail runs every 10-15 minutes.
 Call (408) 321-2300 for exact schedule.

Society for
 Informational Display
 May 16 - 21, 1999

Hotel Accommodations

- 1 Fairmont Hotel, Hdq. Hotel
- 2 Crowne Plaza
- 3 Hilton & Towers
- 4 Hyatt Sainte Claire
- 5 Best Western
- 6 Wyndham Hotel
- 7 Airport Inn International
- 8 Radisson Hotel
- 9 Hyatt San Jose
- 10 Doubletree
- 11 Hanford


 Convention & Visitors Bureau

sustaining members

Acer Display Technology
 Ad-Vance Magnetics, Inc.
 Advanced Display Technologies
 Arconium
 Artesyn Solutions, Inc.
 ATI Technologies
 autronic - Melchers GmbH
 Brewer Science, Inc.
 Brimar Ltd.
 Canon, Inc.
 CELCO
 Cherry Electrical Products
 Chungwha Picture Tubes, Ltd.
 Clinton Electronics Corp.
 Colorado MicroDisplay, Inc.
 Corning Japan K.K.
 Crystaloid LCDs
 Display Inspection Systems
 Display Laboratories
 DisplaySearch
 Displaytech, Inc.
 DNP Denmark
 Dolch Computer Systems
 Earth Computer Technologies
 ELDEC Corp.
 Electronic Designs, Inc.
 Electro-Plasma, Inc.
 Emco Electronics Ltd.
 Endicott Research Group, Inc.
 ERSO/ITRI
 FED Corp.
 F-P Electronics
 Futaba Corp. R&D Center
 General Vacuum, Inc.
 Hewlett-Packard Co.
 Hitachi, Ltd.
 Hoya Corporation USA
 IBM
 Imaging & Sensing Technology
 Incom, Inc.
 Industrial Electronic Engineers, Inc.
 Infinite Graphics, Inc.
 Infodex, Inc.
 Instrument Systems
 Interface Products, Inc.
 Interserv Corp.
 Interstate Electronics Corp.
 ISE Electronics Corp.
 Kent Display Systems
 Lexel Imaging Systems, Inc.
 LinFinity Microelectronics, Inc.
 Lite Array, Inc.
 Micron Display Technology, Inc.
 Microvision Corp.
 Mitsubishi Electric Corp.
 Mitsubishi Electronics America

Motorola FPD Division
 NEC Corp.
 Nippon Seiki Co., Ltd.
 OIS Optical Imaging Systems, Inc.
 OKI Electric Industry Co., Ltd.
 Optical Coating Lab., Inc.
 Optrex America, Inc.
 Philips Flat Display System
 Phosphor Technology Ltd.
 Photon Dynamics
 Photo Research
 Pilkington Micronics Ltd.
 Pix Electronics, Inc.
 Planar America
 Planar Standish, Inc.
 Plasmaco, Inc.
 Polar Vision, Inc.
 Polytronix, Inc.
 Q.C. Optics, Inc.
 Quantum Data Inc.
 RF Power Products
 ROLIC Research Ltd.
 Sarnoff Corp.
 Semiconductor Systems, Inc.
 Schott Corp.
 Sharp Corp. - Japan
 SI Diamond Technology, Inc.
 Sony Corp. Research Center
 Stanford Resources, Inc.
 Supertex, Inc.
 Symbol Technologies, Inc.
 Syntronic Instruments, Inc.
 Tamarack Scientific
 TDK Corp.
 TEAM Systems
 Technoglas, Inc.
 Teledyne Lighting & Display
 Terapixel, Inc.
 Thomas Electronics, Inc.
 Three-Five Systems, Inc.
 Toshiba America Electronic Corp.
 Ultra Electronics Command &
 Control Systems
 ULVAC Technologies, Inc.
 Unipac Optoelectronics Corp.
 Universal Display Corp.
 Ushio America, Inc.
 Viratec Thin Films Inc.
 Vishay-Dale Electronics, Inc.
 Westaim Advanced Display
 Technology
 Westar Corp.
 WINTEK Corp.
 WinTron Technologies
 XCITEK, Inc.
 XMR, Inc.

index to advertisers

BOC Coating Technology.....	10	OCLI	8
CELCO (Constantine Engineering Laboratories Co.).....	C4	Optrex America.....	C2
CyberTouch.....	23	Silver Cloud Manufacturing.....	33
Digital View.....	32	Society for Information Display	45
Display Works 99.....	38	Solomon Technology Corp.	9
ELDIM.....	42	Team Systems	3,23
Ergotron	6	TEKRA	41
Imaging and Sensing Technology Corp.....	33	Three-Five Systems.....	C3
Klein Instruments Corp.....	43,44	Topcon America Corp.....	5
LG Electronics	48	Toshiba America Electronic Components	17
MicroJoin	39	Unigraf	40
Microvision	11,32	Video Instruments	33
NEC Technologies	7	Westar Corp.	6

Business and Editorial Offices

Palisades Institute for Research
 Services, Inc.
 411 Lafayette Street, 2nd Floor
 New York, NY 10003
 Jay Morreale, Managing Editor
 212/460-8090 x212 Fax: 212/460-5460

Sales Office

Palisades Institute for Research
 Services, Inc.
 411 Lafayette Street, 2nd Floor
 New York, NY 10003
 Christy Smith, Director of Sales
 212/460-8090 x211 Fax: 212/460-5460

Employment Opportunity

The Display R&D Center of LG Electronics Inc. (LGE) is soliciting applications for a research engineer position. The applicant must have a strong background in driver circuit design for flat-panel displays, such as field emission or plasma.

Applicants should have a doctoral or master's degree in electrical engineering and research experience in electronic displays.

The LGE Display R&D Center is currently carrying out a number of R&D projects related to flat-panel displays and other displays for the next generation. The LGE research complex is located in the suburbs of Seoul (Woomyeon-Dong). We offer competitive wages and benefits.

Applications will be reviewed beginning immediately and will continue until the position is filled. Please send a letter of application, vita, copies of transcripts, and three professional references (name, position, institution, phone and facsimile numbers, e-mail address) to Mr. John H. Shin, Deputy General Manager, Display R&D Center, LG Electronics Inc., 16 Woomyeon-Dong, Seocho-Gu, Seoul 137-724, Korea. Electronic submissions of application materials are welcome and should be sent via e-mail to johnshin@wm.lge.co.kr.

Get Active

Three-Five Systems, Inc. is proud to introduce an off-the-shelf display solution - the LCaD™ 1/4 VGA display. LCaD™, Liquid Crystal Active Drive, is a passive matrix display which uses customized drive circuitry to scan multiple lines of the display simultaneously. The result is a display with a higher contrast ratio, wider viewing angle, and a lower power requirement than a display using conventional LCD drive techniques.

LCaD™ 1/4 VGA displays bring enhanced viewing capability usually reserved for active matrix displays at a fraction of the cost. The LCaD™ 1/4 VGA generates up to 16 shades of gray and is also easy to interface. With serial and parallel capability

for command/data and all LCD rastering self-contained within the LCaD™ display, developing exciting content of both text and graphics is just a few short programming steps away.

Is the information content of your design increasing? Is your instrumentation or appliance design in need of a facelift? Does your point of sale terminal need an enhanced capability to make a more user-friendly product? Then, get active with LCaD™ displays from Three-Five Systems. For more information or to learn more about how Three-Five's display solutions can revolutionize your products and your business, please contact us.



Display is actual size. LCD image has not been retouched.



THREE-FIVE SYSTEMS, INC.™

We Display Excellence

Three-Five Systems, Inc.
Tempe • 602-389-8600 Fax: 602-389-8801

Three-Five Systems Ltd.
Europe • 44-1793-549100 Fax: 44-1793-549135

Three-Five Systems, Inc.
www.threefive.com email: Display@threefive.com

Circle no. 25

SURF THE 21ST CENTURY WITH CELCO YOKES


As CELCO celebrates their 48th year providing state-of-the-art components for CRT displays, we wish to thank not only our longtime friends, but also the new pioneers in the CRT imaging industry.

We are excited to be on the leading edge of the newest technology in space, avionics, defense, medicine, scientific research, virtual reality and miniature, portable display applications.

CELCO's *newest generation* of high resolution yokes is the result of challenges to meet the needs of high performance in specialized medical imaging displays.


CELCO, a Charter Member of the ever-growing Society for Information Display, annually exhibits their newest products for the CRT display industry at SID.

CELCO founder and CEO, John M. Constanine, Sr., is a SID Fellow honored by the Society "for his widely recognized and significant contribution to the advancement of the display field."

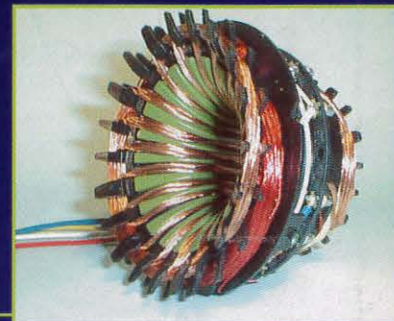


Computer-wound, patented design for high resolution medical monitors

CELCO Yoke for Naval Shipboard Display

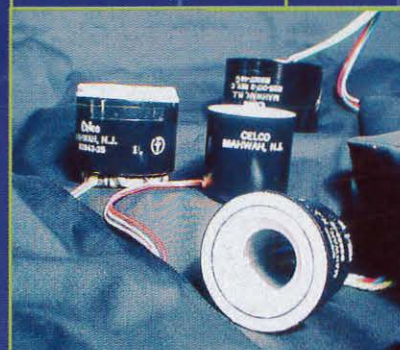

Left: Commercial Head-Up Display Yoke
Top: Flight Mgt. Display Yoke
Bottom: F-18 Map Display Yoke

CELCO HMA400 Deflection Yokes for Helmet-Mounted, Miniature and Virtual Reality Displays

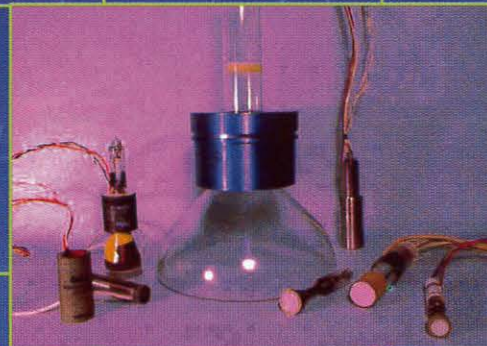

CELCO

Contact CELCO Yoke Design Engineers with your exact display requirements.

70 Constantine Drive ♦ Mahwah, NJ 07430
Tel: 201-327-1123 ♦ Fax: 201-327-7047

E-Mail: CELCO-NJ.com ♦ www.celco.com ♦ www.deflectionyoke.com