

Information

February 1998

Vol. 14, No.2

DISPLAY

Official Monthly Publication of the Society for Information Display

Are Anti-ferroelectric AMLCDs Ready to Challenge TN- and STN-LCDs?



- **Creating Dynamic HMIs**
- **How FLC Devices Work**
- **Electronic Developments for FEDs**
- **FLC '97 Report**
- **SMAU '97 Report**



OPTREX



A M E R I C A , I N C .



Dot Matrix
Character Module



Color Graphics
LCD Module

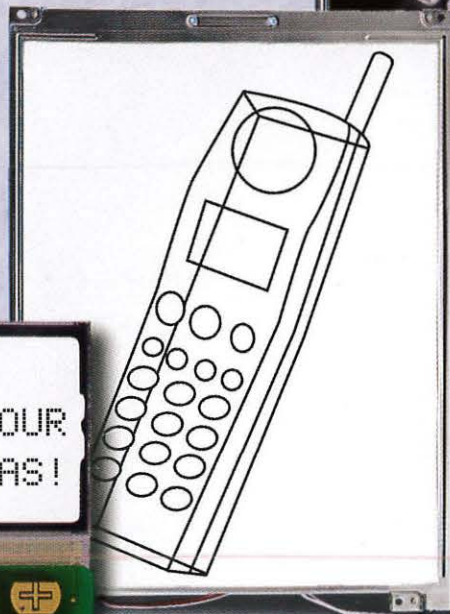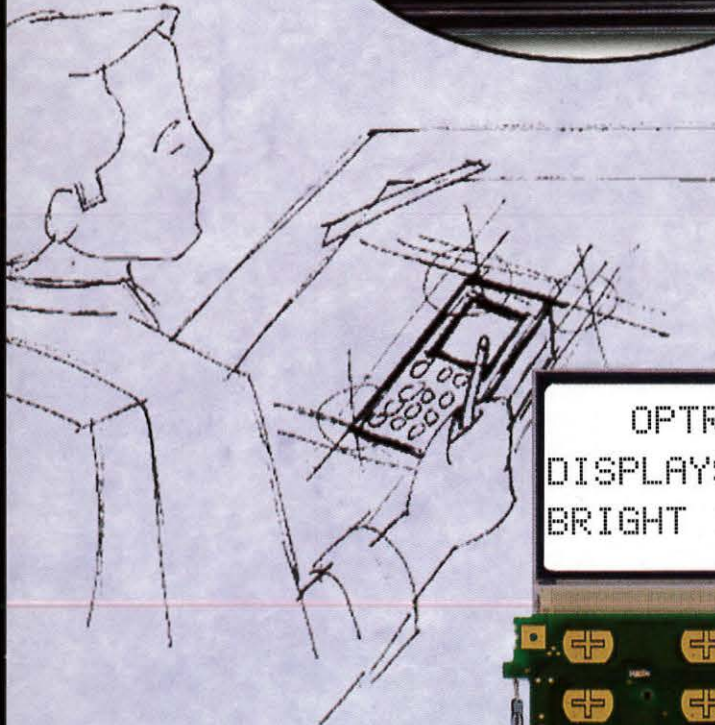

Monochrome
Graphics LCD
Module



Custom
LCD Module

We Can Put Any Bright Idea On Display.

Whatever your LCD needs – standard or custom – Optrex can offer an effective, cost-efficient solution.

For over 30 years, manufacturers have relied upon Optrex for technologically-advanced character, monochrome, color and custom LCD configurations. Founded as a joint venture between Asahi Glass Co. LTD. and Mitsubishi Electric Corp., Optrex provides technical design and support through our own sales organization, and through more than 100 sales and distribution offices worldwide.

For more information call Optrex, or see your electronics distributor today.



Circle no. 11


44160 Plymouth Oaks Blvd. • Plymouth, MI 48170 • (313) 416-8500 • FAX: (313) 416-8520
©1997, Optrex America Inc. All Rights Reserved.

≡ Official Monthly Publication of the Society for Information Display

INFORMATION DISPLAY

FEBRUARY 1998
VOL. 14, NO. 2

COVER: Toshiba's 15-in. TFT panel using chiral smectic-A anti-ferroelectric materials was demonstrated via video at FLC '97. The display "has breathtaking performance. With this development, smectic materials can start to challenge the nematic hegemony," reports Bengt Stebler in the article beginning on page 20.

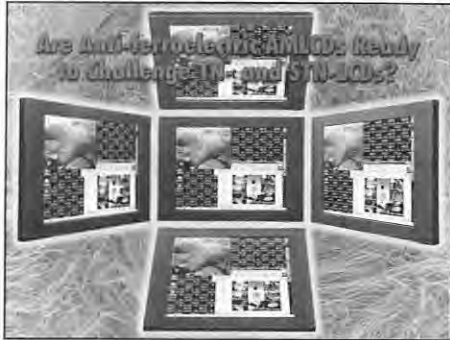

Credit: Toshiba
(Photo supplied courtesy of Paul Surguy)

For more on what's coming in *Information Display*, and for other news on information-display technology, check the SID Web site on the World Wide Web: <http://www.sid.org>.

Next Month in *Information Display*

SID '98 Preview Issue

- Marketing rugged displays
- SID '98 preview
- CIC5 report
- EID '97 report

INFORMATION DISPLAY (ISSN 0362-0972) is published eleven times a year for the Society for Information Display by Palisades Institute for Research Services, Inc., 201 Varick Street, New York, NY 10014; David Slater, Chief Executive Officer; Leonard H. Klein, President; Laura Manganiello, Secretary/Treasurer. EDITORIAL AND BUSINESS OFFICES: Jay Morreale, Managing Editor, Palisades Institute for Research Services, Inc., 201 Varick Street, New York, NY 10014; telephone 212/620-3371. Send manuscripts to the attention of the Editor, ID, Director of Sales: Erika Targum, Palisades Institute for Research Services, Inc., 201 Varick Street, Suite 1006, New York, NY 10014; 212/620-3375. SID HEADQUARTERS, for correspondence on subscriptions and membership: Society for Information Display, 1526 Brookhollow Drive, Suite 82, Santa Ana, CA 92705-5421; telephone 714/545-1526; fax 714/545-1547. SUBSCRIPTIONS: *Information Display* is distributed without charge to those qualified and to SID members as a benefit of membership (annual dues \$55.00). Subscriptions to others: U.S. & Canada: \$36.00 one year, \$5.00 single copy; elsewhere: \$72.00 one year, \$6.50 single copy. PRINTED by Sheridan Printing Company, Alpha, NJ 08865. Third-class postage paid at Easton, PA. PERMISSIONS: Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limits of the U.S. copyright law for private use of patrons, providing a fee of \$2.00 per article is paid to the Copyright Clearance Center, 21 Congress Street, Salem, MA 01970 (reference serial code 0362-0972/98/\$1.00 + \$0.00). Instructors are permitted to photocopy isolated articles for noncommercial classroom use without fee. This permission does not apply to any special reports or lists published in this magazine. For other copying, reprint or republication permission, write to Society for Information Display, 1526 Brookhollow Drive, Suite 82, Santa Ana, CA 92705-5421. Copyright © 1998 Society for Information Display. All rights reserved.

2 Editorial

Japan: "We Must Learn from the U.S."

Ken Werner

4 The Display Continuum

Planting Tulip Bulbs in February ...

Aris Silzars

12 Electronics Development for Field-Emission Displays

Combining amplitude-modulation and pulse-width-modulation drive schemes gives FED-panel designers the best of both worlds.

Robert T. Smith

16 Creating Dynamic HMIs for Modern Display Systems

How can we economically design and maintain human-machine interfaces that must often outlive the hardware and software platforms they are built to run on?

Paul A. Bennett

20 Canon Shows New-Generation FLCD at FLC '97 in Brittany

After years of difficulties, Canon may have gotten the big-screen FLCD solution right.

Bengt Stebler

23 Calendar

24 How Ferroelectric Liquid-Crystal Devices Work

Understanding the operation of the various FLCs presented at FLC '97 makes their advantages and disadvantages clear – and may even make it possible to pick winners and losers.

Paul Surguy

28 SMAU '97: International – and Very Italian

FPD monitors appeared in quantity at Europe's second-largest IT show, but the force was still with CRTs in Milan.

Bryan Norris

36 New Products

45 SID '98 Hotel Reservation Information

48 Sustaining Members

48 Index to Advertisers



Japan: "We Must Learn from the U.S."

Shortly before attending the International Display Workshops in Nagoya in November, I found myself at a reception on the top floor of a company office tower in Tokyo, speaking with the General Manager for International Planning of a major Japanese electronics company and the Tokyo Bureau Chief for *Forbes*. The GM agreed with the man from *Forbes* that if two banks merge in New York, one of their

office towers will be empty in a few months, but when two banks merge in Japan, both buildings remain full of people.

"Why?" asked the man from *Forbes*. "The answer is here," said the GM, tapping his index finger on his forehead - meaning in the Japanese mind. Laying people off is simply something that large Japanese companies don't think they can do. "If Fujitsu or Mitsubishi were to fire 10,000 people today, I would fire 10,000 tomorrow - but I will not be first."

The executive went further. Although individual Japanese companies may do well, he does not see the political will in Japan to make the hard decisions that could ultimately get the economy on track. "People have lost confidence in government," and although manufacturing is efficient, white-collar productivity is very low.

Seemingly everyone in Japan recognizes there is a serious problem and does not hesitate to talk about it. And it's interesting to see where at least some members of the Japanese governmental establishment are looking for solutions. In a keynote address delivered at the International Display Workshops in Nagoya on November 19, 1997, K. Suzuki, Director of Technology Development at the Japanese Ministry of Posts and Telecommunications (MPT) - who was filling in for Akio Motai, the MPT's Deputy Vice-Minister for Technology Policy Coordination, who had been scheduled to deliver the address - spoke very openly about information and telecommunication technologies policy in Japan.

Japan is in a serious economic situation, he said, with low growth in formerly key industries and a very high cost of doing business. The MPT is looking to info-communications - the combination of information technology and telecommunications - as the key to reforming Japan's economic structures.

Suzuki gave U.S. President Bill Clinton more credit as a visionary technology planner than he usually gets at home, speaking admiringly of Clinton's vision for a National Information Infrastructure and his goals of developing a next-generation Internet and a global communications structure. Suzuki noted that the annual growth in info-com industries is 23.3% compared to 9.6% for industrial growth overall. The MPT wants to institute a digital infrastructure for Japan, including optical fiber to every Japanese home by 2005.

Among other initiatives are promotion of new businesses through competition, merit-based pay, and an environment conducive to labor flexibility. The MPT wants to encourage more open research, and Suzuki spoke approvingly of the new Yokosuka Research Park, which includes both Japanese and non-Japanese companies. He also spoke of establishing ATSI - the Asia-Pacific Telecommunications Standards Institute - to be modeled after ANSI in the U.S.

Suzuki spoke admiringly of the U.S. portfolio of info-com companies, which is five times the size of Japan's, and implied that the lively economy in the U.S.

Editor: Kenneth I. Werner
Managing Editor: Jay Morreale
Administrative Editor: Ralph Nadell
Assistant Editor: Dian Mecca
Contributing Editors: Aris Silzars, Bryan Norris, Chuck McLaughlin, Joe Hallett
Advertising Manager: Jay Morreale
Director of Sales: Erika Targum

Regional Associate Editors

Allan Kmetz (**Americas**)
Lucent Technologies
Murray Hill, New Jersey
 Shigeo Mikoshiba (**Asia**)
University of Electro-Communications
Tokyo, Japan
 Alan Mosley (**Europe**)
Central Research Laboratories
Hayes, Middlesex, U.K.

Advisory Editors

Ken Compton
Clinton Electronics Corp.
Rockford, Illinois
 Carl Machover
Machover Associates
White Plains, New York
 Peter Pleshko
PEMM Services
Kingston, New York
 Alan Sobel
Consultant
Evanston, Illinois
 Webster E. Howard
FED Corp.
Hopewell Junction, New York

The opinions expressed in editorials, columns, and feature articles do not necessarily reflect the opinions of the editor or publisher of *Information Display Magazine*, nor do they necessarily reflect the position of the Society for Information Display.

continued on page 43

Powerful Video Generators. The Smart Choices.

STANDALONE

ASTRO VG-823



Dot Clock to 250 MHz
Horizontal Scan to
255KHz



Operated directly from
a PC or with "Remote"
Frontpanels



Compact/High
Performance

256 Levels at all
Frequencies



Standalone Units from **\$2950**

If you want a very flexible Video Generator, the Astro VG-823 is a high performance, lightweight and compact unit that offers the capability to test any high resolution display system up to 1600x1280 at high refresh rates.

With a RB-649 controller it's a bench top video generator. With the RB-614C Remote Box it's perfect for the manufacturing area and it can easily be programmed and operated from a PC via RS-232C—that's true multi functionality.

DIGITAL

ASTRO VG-826



True "Digital" Video
Generator



Dot Clock to 60MHz /
120 MHz



Operated directly from
a PC or with "Remote"
Frontpanels

Very Compact &
Lightweight

8 Bits resolution/
pixel/ color



If you service, repair, evaluate or engineer modern Flat Panel Devices, the Astro VG-826 is the Digital Generator for you.

It's small and light enough to fit in your briefcase, yet has the performance to drive any single or multiplexed Flat Panel Device with a resolution of 24 bits per pixel up to a multiplexed frequency of 120MHz.

It can be programmed and operated from a PC or with the RB-646 "Remote" frontpanel or operated only with the RB-614C Controller.

PC-BASED

UNI VG-D250_{pc}



PC-based Performance



Dot Clock to 250MHz

Horizontal Scan to
250KHz



Fully Programmable
Patterns

Fully DDC Compatible

Accepts Bitmap-Files



PC-Based Units from **\$2500**

This is the best PC-Based Video Generator if you work with Display Systems up to a 1600x1280 resolution. Its "DDC" capability is an increasingly important asset in service & manufacturing applications.

The UNI-VG-D250pc allows VESA-D.P.M.S. testing and the ability to import preset data files from other sources as "test patterns".

The user interface is DOS- and Windows 3.1 and very easy to operate.

Call **1-800-338-1981** Visit **www.team-systems.com**



Planting Tulip Bulbs in February ...

by Aris Silzars

As the keynote speaker finished his talk, a colleague whispered in my ear, "Didn't we hear this same talk ten years ago?" I smiled and nodded vigorously in agreement. A keynote speaker at a major technical conference repeating ten-year-old material? Didn't anyone on the technical-program committee screen

this talk?

The opening session had followed pretty much the standard format for technical conferences, with the obligatory introductions of the conference and program chairmen and the usual polite but content-free welcoming remarks. And then, as again dictated by tradition, came the introduction of the first keynote speaker. This was followed by the customary warm, welcoming round of applause.

Yet, in spite of this all-too-predictable commencement, the first day's opening session of a major technical conference is always, for me, the most exciting. Maybe it's because it triggers memories of past first days at school each fall - times of anticipation and excitement before the newness of the experience has worn off. I especially like the keynote sessions because they often provide a nice overview of where our industry is headed.

This keynote speaker's intent had been just that - to tell us what new opportunities we could expect over the *next* ten years for displays and dashboard electronics in the automotive industry. And this he did rather eloquently by first describing the stringent automotive criteria for ruggedness, temperature range, brightness, contrast, viewing angle, long life, and low cost. Next, he suggested candidate technologies covering the predictable gamut of vacuum fluorescent displays (VFDs), active and passive LCDs, with a brief mention of EL and some future-looking projections for FEDs. The closing remarks re-emphasized that cost and styling issues are the most important determinants for which new display technologies may get used.

And yes, indeed, the problem was that, unbeknownst to this speaker, we had been seeing and hearing most of these same projections in other talks by automotive-industry experts over the *past* ten years - a decade rich in display-technology progress, but in which the automotive industry's display-usage projections had changed hardly at all. Had the automotive industry fallen into some kind of previously undiscovered time-warp singularity, a singularity where time moves at about one-tenth earth speed?

Back (... to the future?) in 1986, I too had predicted some modest progress in the area of automotive electronics and displays. I thought that surely by 1996 we would see some new implementations of electronics in automobile dashboards. But reality could not be denied. Last year I had to admit that this was my biggest technology forecasting miss of the last decade. And, darn it, I was trying so hard to be conservative - and *was*, compared to every other futurist!

Why are we consistently so far off in our expectations when it comes to electronics in automobiles? Even industry insiders mislead us by promising a migration to electronic dashboards that never happens. At least it hasn't happened in the last thirty years. Shouldn't automobiles be one of the great opportunities for new flat-panel-display technologies? Well, shouldn't they? ...

continued on page 40

SID Executive Committee

President: W. E. Howard
President Elect: A. C. Lowe
Regional VP, Americas: E. Stupp
Regional VP, Asia: H. Uchiike
Regional VP, Europe: E. Lueder
Treasurer: A. Silzars
Secretary: A. Kmetz
Past President: A. I. Lakatos

Directors

Bay Area: H. Sherman
Beijing: S. Ding
Belarus: A. Smimov
Canada: V. Angelo
Delaware Valley: J. W. Parker III
France: F. Maurice
Greater Dayton: R. Holmes
Hong Kong: C. C. Chang
Japan: A. Iwamoto
Korea: C. Lee
Los Angeles: P. Baron
Metropolitan Detroit: R. Donofrio
Mid-Atlantic: D. Ketchum
Mid-Europe: R. Mauch
Minneapolis/St. Paul: V. Born
New England: W. Hamilton
Pacific Northwest: J. Rupp
Russia: M. Tomilin
San Diego: R. Ruff
Taipei: F. C. Luo
Texas: Z. Yaniv
U.K. & Ireland: R. Johnson
Ukraine: V. Nazarenko

Committee Chairs

Academic: C. J. Summers
Archives/Historian: R. C. Knepper
Bylaws: C. Infante
Chapter Formation: J.-N. Perbet
Convention: P. M. Heyman
Definitions & Standards: R. Miller
Honors & Awards: A. I. Lakatos
IDRC: F. J. Kahn
Intersociety: Z. Yaniv
Long-Range Planning: W. F. Goede
B. J. Lechner

Membership: J. W. Parker
Nominations: A. I. Lakatos
Office Liaison: D. Pinsky
Publications: A. Silzars
Journal Editor: A. Sobel
Information Display Editor: K. I. Werner
Communications: R. K. Ellis

Chapter Chairs

Bay Area: J. Larimer
Beijing: H. C. Hu
Belarus: E. Kaloshkin
Canada: A. Kitai
Delaware Valley: S. Kalatucka, Jr.
France: H. Brettel
Greater Dayton: J. Byrd
Hong Kong: H. S. Kwok
Japan: S. Mikoshiba
Korea: M. Oh
Los Angeles: M. Kesselman
Metropolitan Detroit: J. Erskine (Acting)
Mid-Atlantic: T. Nelson
Mid-Europe: M. E. Becker
Minneapolis/St. Paul: H. Holec
New England: P. Breen
Pacific Northwest: T. Yuzuriha
Russia: A. Doronov
San Diego: R. Ditzik
Taipei: H.-P. D. Shieh
Texas: D. McFarland
U.K. & Ireland: B. Needham
Ukraine: V. Sorokin

Office Administration

Executive Administrator: Lauren Kinsey
Membership Coordinator: Nancy Stafford

Society for Information Display

1526 Brookhollow Drive, Suite 82
Santa Ana, CA 92705-5421
714/545-1526, fax -1547
e-mail: socforinfodisplay@mcimail.com
http://www.sid.org



Of Course We Have One In Your Size

Whatever the size, form, or function, DATA MODUL LCD Products offer the perfect fit

DATA MODUL's Batron line of LCD products offers high-performance, cost-effective, application-specific solutions to meet your every requirement.

THANKS TO DATA MODUL, THE WORLD IS FLAT AGAIN. Consider our biggest innovation—we were one of the first to introduce the space-saving 20" LCD multi-sync color monitor, with a viewable image area equivalent to a 23" CRT. Powerful, high resolution, razor-sharp images that dazzle the eye with a full spectrum of brilliant colors.

Or take a look at some of our smaller feats—LCD

modules with character heights as small as 3mm, wide-viewing angles and a choice of colors. As a LCD technology leader, DATA MODUL offers unparalleled innovation. Our ISO 9001 and CE certifications mean we can deliver the highest quality and most reliable products in a broad range of applications.

To find out more about DATA MODUL expertise and capabilities in the world of LCDs, contact us.

DATA MODUL



A leader in customization, our AM-TFT monitors can be modified for customer applications, including panel/rack/wall mounts.



High-contrast and extended temperature range make Batron LCD modules ideal for all environmental conditions.




DATA MODUL's line of video-ready NTSC monitors, available from 5.5" (diagonal) and up, incorporate LCD technology.

Flat Panel Monitor **ARMS**TM

Call: 1.800.888.8458


Ergonomically position your flat panel monitors, laptops and keyboards wherever you need them—with Ergotron's **Adjustable Rotating Mounting Solutions**

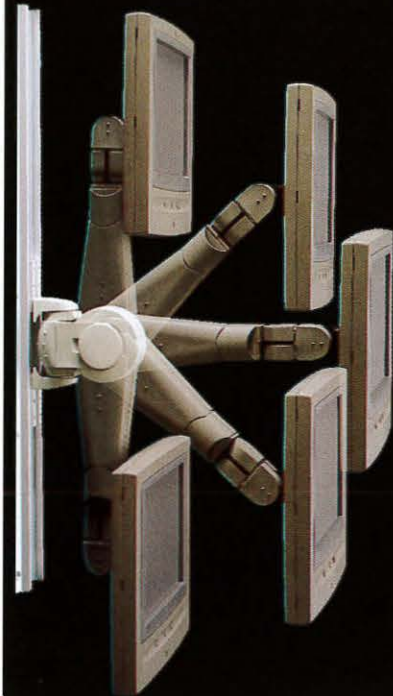

Mobile Solutions



Wall Mount Solutions



Custom Mount Solutions

Laptop Mounting Solutions



ERGOTRON[®]

1.800.888.8458 <http://www.ergotron.com>

Circle no. 14

Flat Panel Display Performance Measurement Systems

❖ Luminance

- ✓ Tests displays up to 47" automatically
- ✓ Executes VESA basic and extended tests
- ✓ Uses PR, Topcon, and Minolta instruments
- ✓ Stimulates any monitor, module, or cell assembly
- ✓ Sizes and configurations for every application

❖ Chrominance

❖ Viewing angle

❖ VESA testing





Westar Corporation

Westar is a leading international supplier of flat panel test and interface solutions to the aerospace, computer, and FPD product industries. To learn more, contact us in the US at: (314) 298-8748, ext. 286, or visit our web site at www.westar.com/esg

Circle no. 15

Thin Film coatings from our new ULVAC SDP300 are unsurpassed ...

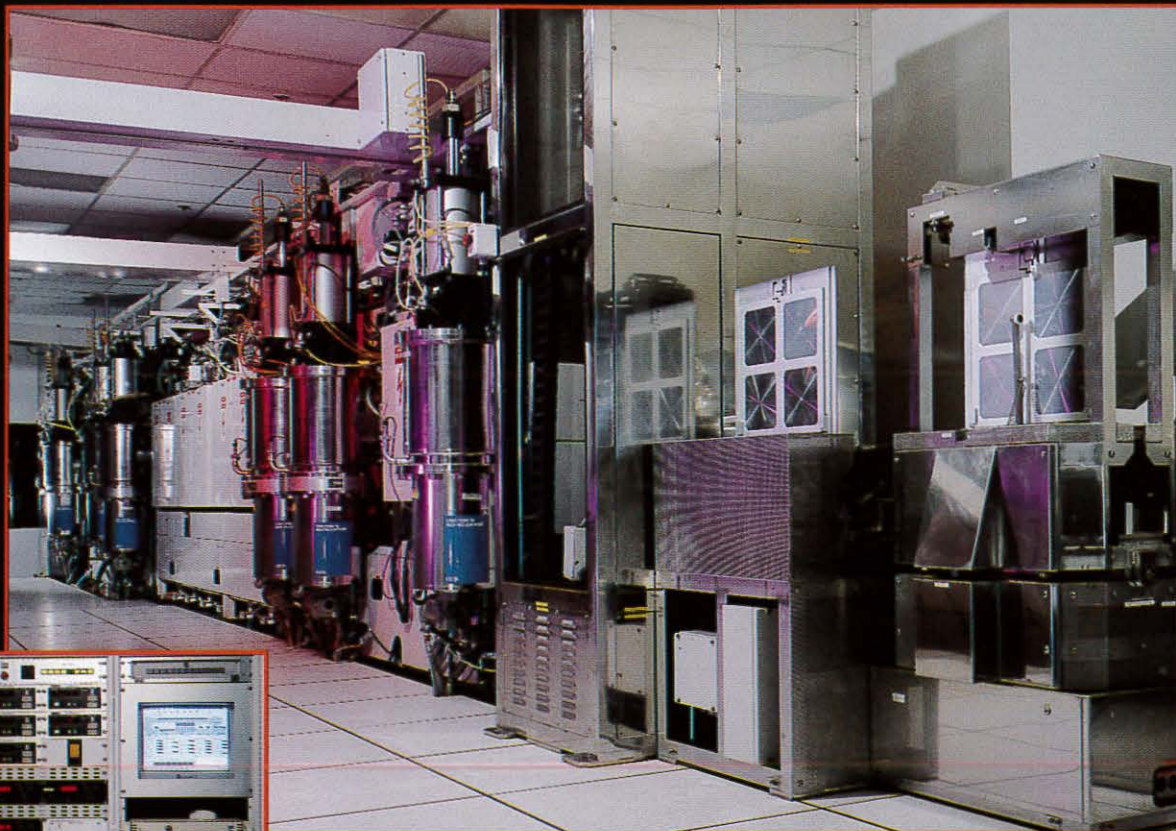

ULVAC SDP300

Just Compare our Quality, Price and Delivery!

Extremely low defect (@5KLux!), Large area, High volume

- ITO Coated Substrates
- Index Matched ITO (ITO with AR)
- Chrome-Copper-Chrome
- ITO & BBAR @ Room Temperature
- Black Chrome (Black Matrix)
- Anti-Reflective Coats (BBAR, etc.)
- Etching & Patterning (to 2 μ m)

SPECIAL CUSTOMER SERVICES INCLUDE:

- Volume or Custom Orders
- Glass/Plastic Substrates
- Quality to Mil-I-45208
- Precision Glass Cutting
- Large Sizes
- Stock Sheets and ... a lot more


ALL COATINGS ARE ION-SPUTTERED

THIN FILM DEVICES, INCORPORATED

1180 North Tustin Avenue • Anaheim, CA 92807 • 714/ 630-7127 • Fax: 714/ 630-7119

Circle no. 16



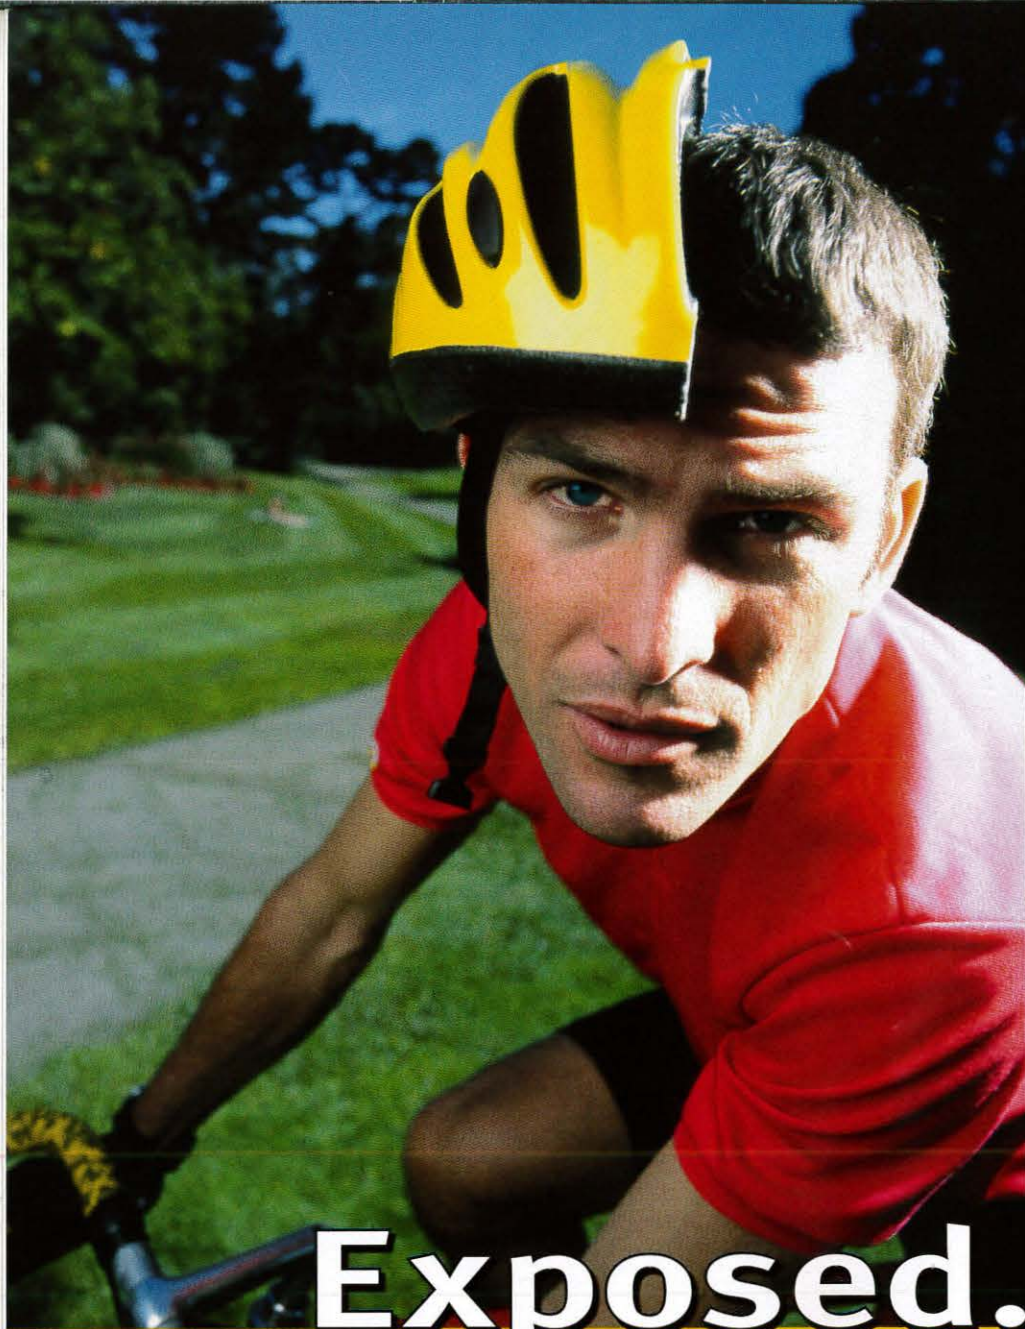

Without fab-wide

IONIZATION

you're still

VULNERABLE

to the hazards of

STATIC CHARGE

Exposed.

Finish the job! You've protected your reticles from ESD and particles in the photolithography area. How about reducing wafer contamination in diffusion areas and wet benches? Ionizing only a few areas of the fab leaves the rest of your process exposed to static charge-related problems. An ESD event can happen anywhere, causing equipment lock-up and product damage.

The more areas you ionize, the better-protected you'll be.

With the threat of equipment downtime and device failures, your potential for static charge-related loss is far greater than the cost of a complete, fab-wide ionization plan. Ionizing your entire facility will provide incremental productivity gains with greater throughput, yield and profits.

Don't leave your process exposed! Call 1-800-367-2452, 510-548-3640 or visit us on the web at www.ion.com.



Circle no. 17

DynaColor



The birth of a beautiful product starts with DynaColor Test Instruments.

Monitor Auto Alignment System

D8000 is the best-selling single-camera monitor auto alignment system. It is now available for CRT and TV applications.



Product Applications:

- Monitor/TV production automation
- ITC/yoke production automation
- QA/QC inspection
- Field repair
- Engineering test instrumentation
- Display product qualification

Alignment and Measurement Functions:

- Purity
- Geometry
- Colorimetry
- CRT / Yoke Integration
- Convergence
- Voltage
- Focus



IT'S VERY WELL
MADE IN TAIWAN

Set-Top Box Pattern Generator

D5100 is a portable MPEG-II Transport Stream generator specifically designed for digital audio visual applications.



Product Applications:


- Set-Top Box and ATV development
- MPEG-II / ATV IC development
- Set-Top Box and ATV demonstration
- Set-Top Box production testing
- Set-Top Box qualification

Key Features:


- Transport streams compliant with ATSC, DVB and DAVIC specifications
- Build in standard test sequences
- Jitter generation capability
- Programmable test sequence
- Generate EMM and other system information
- Memory card Interface

Digital Broadcasting

Satellite Terrestrial Cable

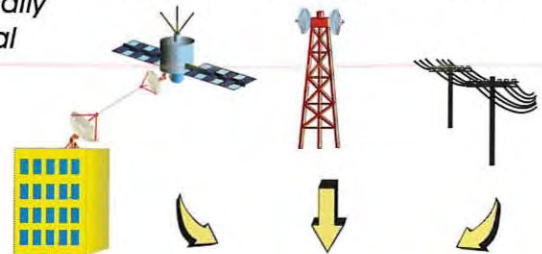

Set - Top Box

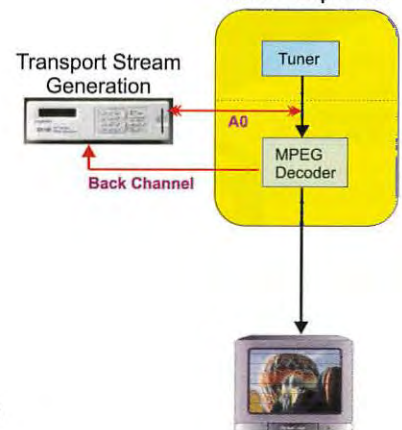

Circle no. 18

DynaColor, Inc.


4F, No. 10, Lane 609, Sec. 5, Chung Hsin Road,
San-Chung City, Taipei Hsien, Taiwan, R.O.C

E-mail: dynacolor@ms2.hinet.net

Tel: 886-2-2781938 Fax: 886-2-2781817



Where Total Solution is a way of life

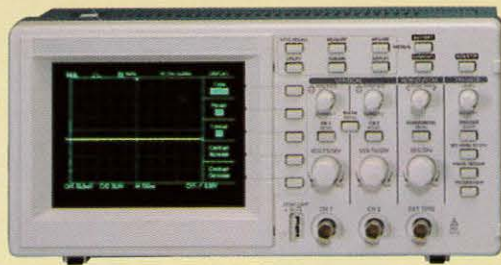

PixTech FED




Standard LCD

Well sure, most LCDs look swell when viewed head on.

Ideally, users of your LCD-display equipment will have a head-on view, like a TV or lap-top computer. But, in the real world, they must often work with the instrument's display off to the side, or even rack-mounted. What do LCD users see then? Does the image reverse? Does it fade to unviewable faintness? Do even the "improved viewing angle" displays still require the "LCD bend and stoop" to see anything recognizable on the screen?

Consider the display user's visual task ... in real world applications. How easy (or difficult) is it for your customer to see what is on the screen of the instrument with your name on it?

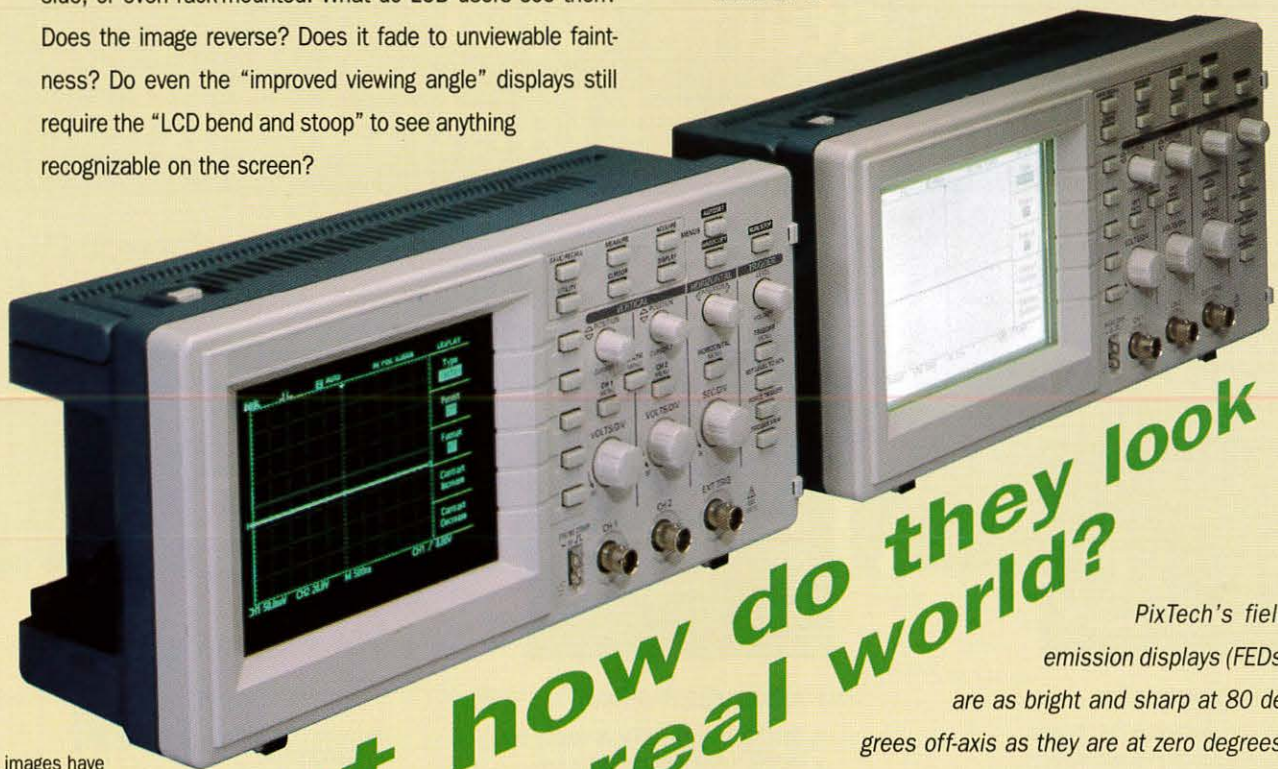

Screen images have not been retouched or enhanced in any way.

But how do they look in the real world?

PixTech's field emission displays (FEDs) are as bright and sharp at 80 degrees off-axis as they are at zero degrees.

Left and right; up and down. No neck-cranning here. This clear, undiminished viewing angle makes working with PixTech FED displays much more user friendly and workplace-efficient. And lets you, the equipment manufacturer, get a real leg-up on the competition. So specify PixTech FEDs. Everyone (except chiropractors) will thank you for it.

 **PixTech**
Flat panel displays for the real world.

3350 Scott Boulevard, Bldg. 37 ■ Santa Clara, CA 95054
(408) 986 8868 ■ Fax: (408) 986 9896
1 888 PIXTECH ■ www.pixtech.com

Our Customers Are As Varied As Our Films.



By providing the world with the best sputter coated film technology for over a decade, Courtaulds Performance Films has helped a wide variety of industries launch innovative products. Brighter longer-lasting EL lamps, transparent touch panels, membrane switches, specialty two-side-coated satellite blankets, and miniaturized fine-line flex circuits have all benefited from the consistency and cost effectiveness of Courtaulds' sputter coated films. Backed by our superior coating technology, engineering, and technical support, Courtaulds will help you convert ideas into realities. So, no matter what the application, bring your ideas to Courtaulds. We have your film needs covered.



**COURTAULDS
PERFORMANCE FILMS**

21034 Osborne Street • Canoga Park, California 91304 • 818.882-5744 • FAX: 818.882-6519

Circle no. 20

Electronics Development for Field-Emission Displays

Combining amplitude-modulation and pulse-width-modulation drive schemes gives FED-panel designers the best of both worlds.

by Robert T. Smith

THE FIELD-EMISSION DISPLAY'S (FED'S) electron source makes a flat CRT possible. The flat-CRT display is composed of a large number of electron emitters in an addressable matrix. Each addressable location of the matrix corresponds to a display pixel that is in close proximity to the phosphor screen. Therefore, the flat CRT does not need a deflection system.

Unlike CRTs, which use raster addressing, FEDs can use line-by-line addressing. This results in dwell times much longer than those produced by the flying spot of a conventional CRT. The longer dwell time permits lower pixel current for a given brightness, thus eliminating the problems of beam divergence and phosphor saturation that occur in high-brightness CRTs.

The electronics for the FED have several functions. The standard analog video signals must be converted to a form appropriate for driving the FED. And ultimately, the drivers must accurately control the charge that impacts the phosphor screen.

Much of what has been written about FEDs concerns the physical structure of the display and ways of fabricating the emitters. But as more FEDs approach commercialization, it has become important to think about the vari-

ous ways of controlling the delivery of charge to the screen and to determine which technique is best suited for a particular situation.

FED Basics

The potential barrier at the surface of a metallic conductor binds electrons to the bulk of the material. This potential barrier is called the work function, and is defined as the potential difference between the Fermi level and the height of the barrier. For an electron to leave the material, the electron must gain an energy which exceeds the work function. This can be

accomplished in a number of ways, including thermal excitation (thermionic emission), electron and ionic bombardment (secondary emission), and the absorption of photons (photoelectric effect). Fowler-Nordheim emission or field emission differs from these other forms of emission in that the emitted electrons do not gain an energy which exceeds the material work function.

Field emission occurs when an externally applied electric field at the material surface thins the potential barrier to the point where electron tunneling occurs, and thus differs

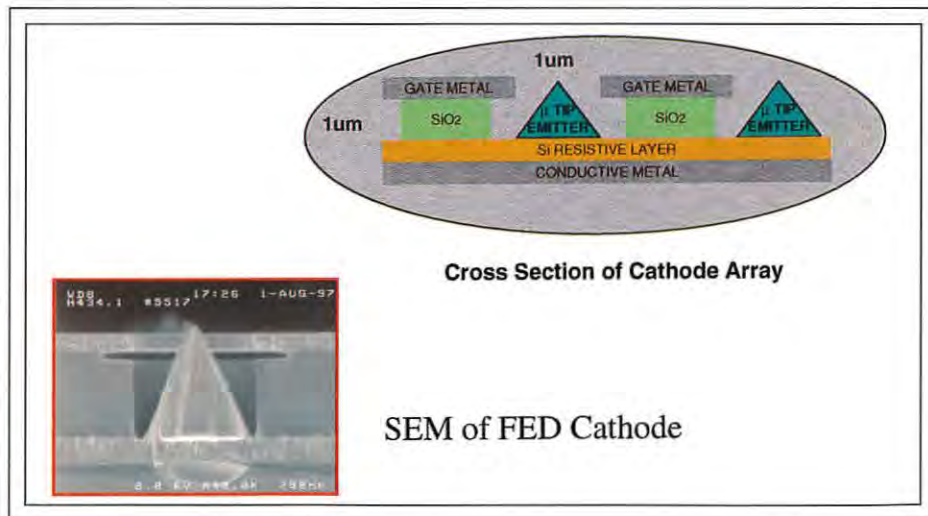


Fig. 1: The FED is a sharp point with a connecting electrode, a dielectric layer, and an isolated extraction gate in close proximity. A voltage between the gate and the point generates a high field, which allows electrons to be liberated through tunneling.

Robert T. Smith is a member of the technical staff at Motorola's Flat Panel Display Division, 7700 S. River Pkwy., Tempe, AZ 85284; telephone 602/755-5072, fax 602/755-5066, e-mail: ayrk60@email.mot.com.

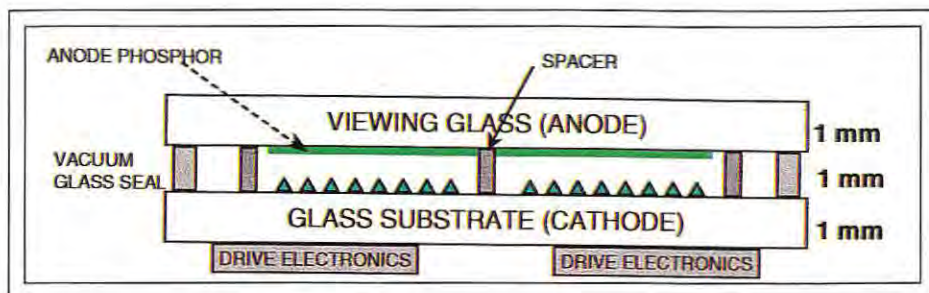


Fig. 2: An FED must be enclosed in a vacuum package to prevent destruction of the cathode by ionization, the formation of plasmas, and arcing.

greatly from thermionic emission. Since there is no heat involved, field emitters are a "cold-cathode" electron source.

One needs to apply an electric field on the order of 30–70 MV/cm at the surface of a metallic conductor to produce significant tunneling current. For example, if an electrode is placed 1 μm from the surface of a conductor, it would take 1000 V between the electrode and cathode to induce significant current flow. Obviously, a flat-panel display (FPD) that is addressed at 1000 V is of little use. Therefore, "field enhancement" is used to lower the necessary addressing voltages.

The FED is a sharp point, or whisker, with a connecting electrode, a dielectric layer, and an isolated extraction gate in close proximity (Fig. 1). If a positive potential is applied between the gate and cathode, a uniform electric field is produced in the dielectric. But the presence of the emitter produces a compression of the equipotential lines at the tip, and thus a high electric field. This is field enhancement.

Field enhancement is a geometric property and is strongly dependent on the sharpness of the tip. Note that the dielectric must hold off the un-enhanced field, so field enhancement is essential for operation of the FED. With field enhancement, a reasonable voltage applied to the extraction gate results in electron emission at the point.

The Vacuum Package

From the foregoing brief description of field emission, one might suppose that the emission of electrons into a gassy medium might be a problem because ionization, the formation of plasmas, and arcing would cause destruction of the cathode. It is for this reason that the FED – like the CRT – is a vacuum device. To make a display, a vacuum package is needed (Fig. 2).

The cathode is composed of row and column conductors separated by an insulating layer. These layers are deposited on an insulating substrate, such as glass. The locations where the rows and columns cross define a pixel. The row conductors serve as the extraction gate, and the column conductors connect to the cathodes.

The anode is the phosphor screen and is composed of the phosphor powders, which are deposited within a black matrix. The entire anode is covered with a thin aluminum layer, which bleeds off the electrons that bombard the screen. The cathode and screen, along with spacer materials, are aligned, sealed, and evacuated to complete the vacuum package.

Electron emission from each pixel is controlled by a forward bias between the gate and cathode. Once released from the confines of the bulk material, the emitted electrons are accelerated toward a phosphor screen. The voltage applied to the screen must be higher than the gate voltage or the emitted electrons. The screen (anode) voltage must also be high enough so that most of the electrons' energy remains once they penetrate the aluminum layer covering the phosphor particles.

A typical current-voltage response for an FED pixel with a resistive ballast layer is shown in Fig. 3. The resistive layer eliminates current runaway, which could otherwise lead to a damaged cathode panel. Non-uniform pixel emission is also improved – but not eliminated – by using the resistive layer.

The Display System

To complete the FED system, various subsystem components are needed to control operation of the vacuum package (Fig. 4). Other than the vacuum package, the subsystems include the video controller, panel controller, and row and column drivers. The component

subsystems will differ depending on whether the input is analog or digital.

For an analog composite video signal containing red, green, and blue (RGB) information and timing signals, a video controller is used. The controller samples the analog signal, digitizes it, and separates it into RGB components. Horizontal and vertical timing information is also extracted from the composite input. The video controller then presents the digitized video information to the panel controller in the form required by a standard digital video interface specification. This standard specifies digital RGB data up to 18 bits in parallel, horizontal and vertical sync, a pixel clock, and a data valid signal. Other processing that may be required in the video controller are gamma correction and adjustment of color saturation, brightness, and contrast.

In order to keep the FED compatible with other FPD technologies that accept digital input, the panel controller must accept the standard digital-interface signals and extract the signals necessary to drive the FED row and column drivers. In most cases, the signals appearing at the digital interface are used directly by the row and column drivers, and the functionality of the panel controller is minimal. However, depending on the drive approach used and on the design of the drivers, some functionality may be required on the panel.

Line-by-line addressing is used to display an image on the FED. Typically, the row connections are the FED gates, and the columns are the FED cathodes. The rows are scanned sequentially from top to bottom. As each row is selected, the columns are used to modulate the current in the pixels of the selected row.

The voltage applied across the pixel is the difference between the row-select voltage and the column voltage. For white level – a current level that produces "white" on the screen – a pixel current between 1 and 10 μA is needed, depending on factors such as brightness, phosphor efficiency, and anode voltage. For a typical FED, a gate-cathode voltage of approximately 80 V is required to achieve full white brightness. The pixel OFF current for black level is 50 V or less. The modulation voltage used to control the intensity of each pixel is the difference between the white and black levels, or about 30 V (Fig. 3).

As a result, the row-select voltage is not required to switch to 0 V for the OFF state

FED system design

and the row driver can be referenced to a dc offset. Rise and fall times for the row and column signals in the FED determine the maximum scan rate and gray scale of the display – and, therefore, the highest possible resolution. The high-voltage output devices in the driver must be sized to supply enough transient current to support the required scan rates for the display.

From a functional standpoint, the row driver is a very simple circuit that provides only a row-select signal as the display is scanned from one line to the next. The column driver presents gray-scale image information to the pixel and differs from the row driver both in functional complexity and bandwidth performance.

Gray Scale

There is more than one way to modulate the pixel intensity with the column driver, and there are tradeoffs with each approach, including power consumption, susceptibility to cathode defects, ability to drive the required load, and display uniformity. The leading approaches are amplitude modulation (AM), pulse-width modulation (PWM), and a mixed AM/PWM approach. Each of these approaches can be used with column drivers configured as either voltage or current sources.

Current vs. Voltage

If gray scale is achieved by modulating a voltage source, we must confront the problem of non-uniform pixel emission. The problem arises because, if we modulate a voltage source, all pixels must emit the same current at a given voltage. Individual emitters do not emit uniformly under these conditions, so uniformity is attained by having each pixel consist of many individual emitters. Uniformity is attained statistically.

This approach works, but at the expense of a larger pixel, which increases capacitance (reducing bandwidth and increasing power) and will limit the smallest pixel pitch that can be attained in an FED.

The other option is to control emission with a dependent current source. Here, as the row is selected the column voltage is allowed to float to a value corresponding to the current set in the dependent current source. The only requirement is that the row-select voltage be high enough to accommodate all possible currents in all pixels of the display. Because a current source is used, the need for redundancy in the pixel design is greatly reduced, which reduces capacitance. Unfortunately, since current is limited to the emission level – which happens to be much smaller than the charging current – the column's voltage-slew-

ing ability can be compromised and become a bandwidth-limiting factor.

Pixel leakage, the most common cathode defect, also affects the drive electronics. Except for a dead short between rows and columns, a voltage-drive approach would not be affected by leakage. But even low levels of leakage in a pixel will cause intensity distortions when a current-drive approach is used.

Amplitude Modulation

Intensity variation of the pixel by AM can be accomplished with either voltage or current drive to the columns. With either approach, the column driver forces a level proportional to the pixel brightness, which is held for the entire row-select time. Design of the AM column-driver circuit is relatively simple, but it must maintain high accuracy, particularly at low emission levels. The FED has an exponential response, so 256 gray levels require accuracy in the millivolt – or nanoampere – range at low luminance levels. Transient power is minimized because the voltage excursions from one row-select time to the next are minimal.

With an AM voltage source, the display will suffer from non-uniformity at low luminance levels. The ballast resistance of the pixel produces uniform emission only if a significant voltage drop occurs across the ballast. At low emission levels this voltage drop is small, so pixel emissions tend to become very non-uniform.

Pulse-Width Modulation

Pixel intensity can also be modulated in time. The pixels are operated at a constant current by either a voltage or current source. During a row select, the pixel is on for some fraction of the line time. Dark pixels are not turned on at all and white pixels remain on for the entire row-select time. Gray scale is achieved by varying the ON-time of the pixel between these two extremes.

Since the driver is digital, the output accuracy can be substantially relaxed from what it is in AM approaches. Unfortunately, transient power is maximized because the same voltage transitions occur whether the pixel is at a low or high luminance level. In addition, the slew rate is dependent upon the required number of gray levels and can be quite high. Pulse widths on the order of 100 nsec may be required.

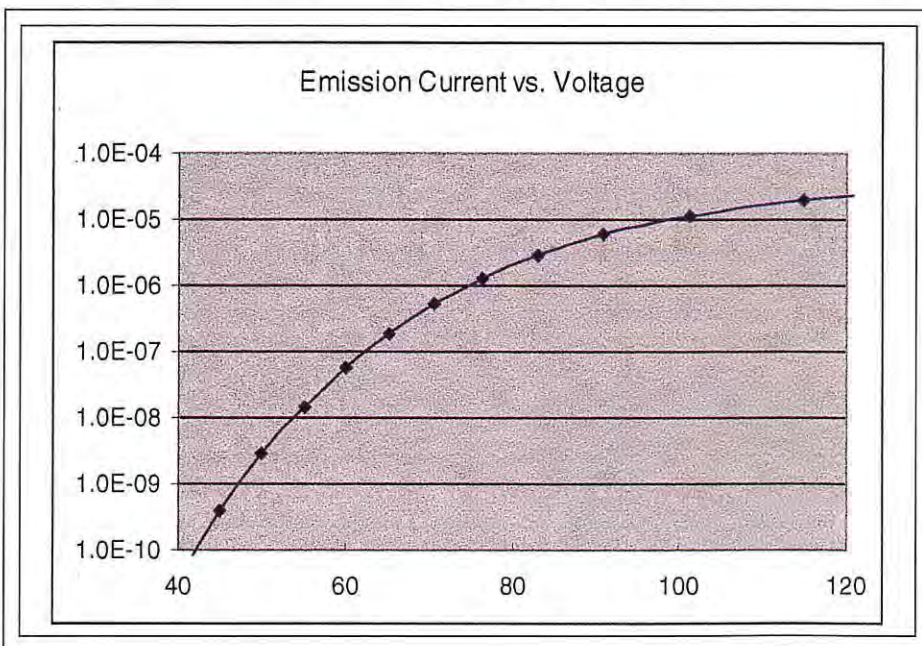


Fig. 3: This is a typical current-voltage response for an FED pixel with a resistive ballast layer, which eliminates current runaway.

The Smart Choice in Multi-Function Video Generators

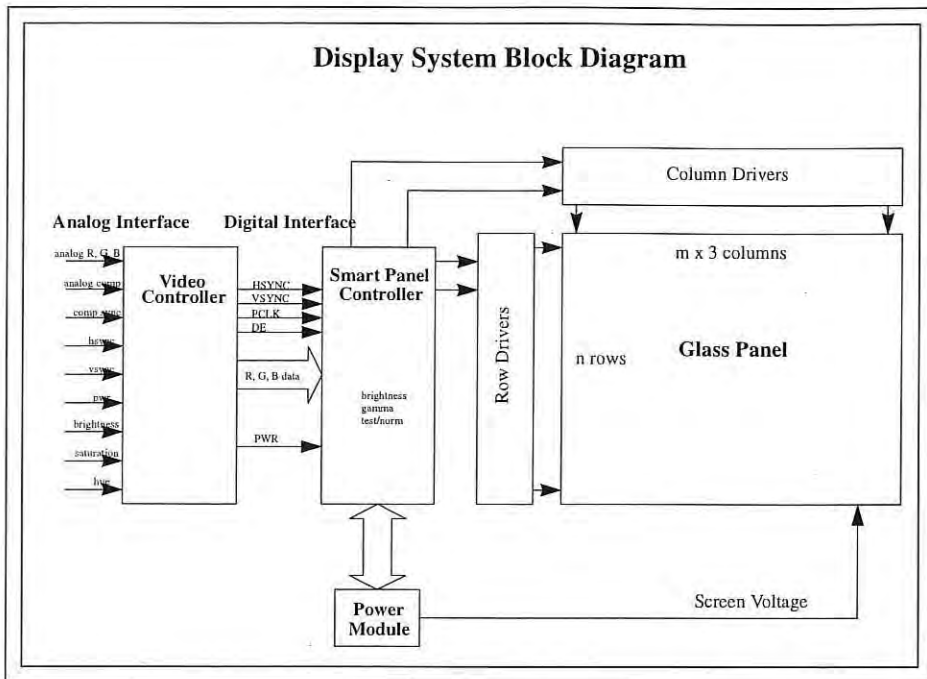


Fig. 4: To complete the FED system, a video controller, panel controller, and row and column drivers must be added to the vacuum package. The component subsystem will differ depending on whether the input is analog or digital.

AM/PWM

A combination of AM and PWM has distinct advantages over the PWM-only approaches. The main problem with PWM is the very short pulse widths needed for low-luminance pixels. Very short pulse widths require very fast rise and fall times and very high charge currents. AM/PWM relaxes this requirement by splitting the video data byte into N nibbles. N current sources with currents scaled to the proper magnitude are operated in PWM by the appropriate nibble. The resulting current pulses are summed at the column connection. This reduces the number of discrete time increments per row-select time from 2^n to $2^{n/N}$, where n equals the number of video bits.

This AM/PWM approach can be applied with voltage sources as well. Consider the possible values of emission current from the pixel. For the case of $N = 2$ - and 8-bit video, there are four possible values, one of which is the OFF-state. This can be implemented as a voltage driver with four possible output states corresponding to each of the three possible emission currents and the pixel OFF-state.

Where Are We Now?

The FED holds the promise of providing a

very high-quality CRT-like image in a thin, low-power package. The video controllers that have been developed for the LCD industry apply equally to an FED, and there are existing IC processes that would support the row and column driver needs for FEDs. (In addition, custom drivers have been developed.)

At Motorola we have demonstrated that a cost-effective electronics drive system can be designed that is compatible with existing flat-panel electronics and can provide up to 8 bits of gray scale. With these developments, easy integration of FEDs into new products should be straightforward. Prototype FEDs from several manufacturers are available, and mass-production is expected in 1998.

References

- C. A. Spindt and I. Brodie, "Molybdenum Field-Emitter Arrays," *IEDM '96*, pp. 289-292.
- S. Itoh *et al.*, "A Challenge to Field Emission Displays," *Asia Display '95*, pp. 617-620.
- R. Smith, "Drive Approaches for FED Displays," *Conference Record of the 17th Intl. Display Research Conf. (IDRC '97)*, F-35 (1997). ■

ASTRO VG-823

Dot Clock to 250 MHz



Horizontal Scan to 255KHz



Operated directly from a PC or with "Remote" Frontpanels



Compact/High Performance

256 Levels at all Frequencies



If you want a very flexible Video Generator, the Astro VG-823 is a high performance, lightweight and compact unit that offers the capability to test any high resolution display system up to 1600x1280 at high refresh rates.

With a RB-649 controller it's a bench top video generator. With the RB-614C Remote Box it's perfect for the manufacturing area and it can easily be programmed and operated from a PC via RS-232C—that's true multi functionality.

Make the *Smart Choice*...

Contact TEAM.

Call 1-800-338-1981 or visit us at <http://www.team-systems.com>

TEAM
systems

"Test And Measurement Technology"

Circle no. 21

Creating Dynamic HMIs for Modern Display Systems

How can we economically design and maintain human-machine interfaces that must often outlive the hardware and software platforms they are built to run on?


by Paul A. Bennett

PHYSICAL DISPLAY DEVICES, such as cathode-ray tubes (CRTs) or active-matrix liquid-crystal-display (AMLCD) panels, present information to a system's users. The physical display screen is the most tangible element of a display system, but from the user's perspective it fades into the infrastructural background. What really matters to a system's user is the data the system presents to him or her. Human-machine interfaces (HMIs) are designed to optimally present data to users performing complex tasks.

HMIs are typically found in special-purpose computing environments, rather than in general-purpose environments like PCs. HMI elements tend to be dynamic, changing their appearance as a result of changes in data.

The appearance of HMIs tends to be closely related to their function, often as software alternatives to the electro-mechanical instrumentation they are increasingly replacing. Examples of HMIs include such things as displays in aircraft "glass cockpits" (Fig. 1), screen displays for a variety of medical instruments, and new electronic instrumentation packages for vehicular use.

Paul A. Bennett is manager of technical marketing at Virtual Prototypes, Inc., 4700 de la Savane, Suite 300, Montreal, QC, Canada H4P 1T7; telephone 514/341-3874, fax 514/341-8018, e-mail: bennett@VirtualPrototypes.CA.

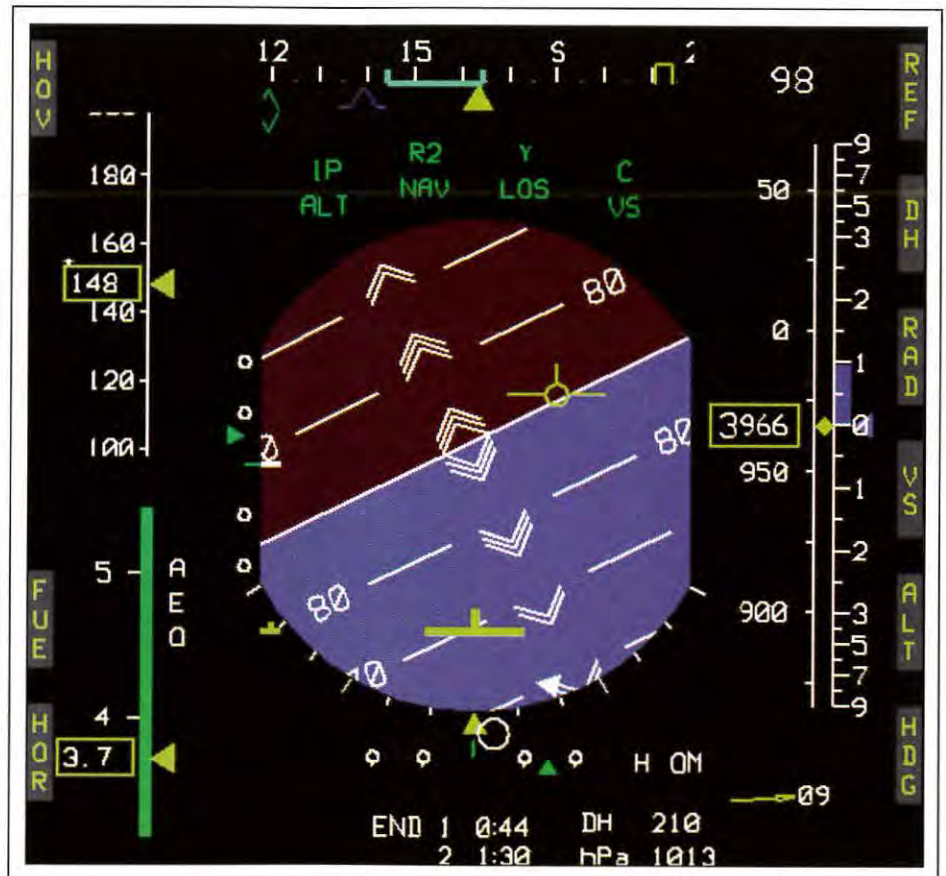

Virtual Prototypes, Inc.

Fig. 1: Complex human-machine interfaces (HMIs), such as this primary flight display, require extensive development and more efficient development methods.



The Boeing Company

Fig. 2: A typical avionics display driven by embedded VME hardware.

Building HMIs

The generation of the images one sees as the HMI must be programmed along with the other behaviors of the system, such as controlling devices and retrieving data from them. The traditional approach to building HMIs has been to laboriously hand-code programs using text editors. These programs are then turned into executable programs by a suite of software-development tools that includes a compiler, assembler, linker, and debugger.

HMIs have tended to become more complex over the years as greater demands are made of human operators and of the HMIs designed to assist them. This increasing complexity has led to the development of a variety of tools for reducing the risks involved in developing HMIs for today's high-quality displays.

Until recently, however, the problem with HMI prototyping tools has been that prototyping was all they did. A user would develop a graphical prototype of the HMI to be built. A team of programmers would then be sat down in front of the prototype and told, "Build that!"

This approach to HMI development resulted in wasting most of the effort that went into building the HMI prototype because the HMI had to be developed all over again, usually by

hand-coding it in some high-level language such as C. In the normal course of these projects, someone would discover an emerging market requirement, or that something had been overlooked, or that standards had changed - but only after a significant investment in code had been made. Then, the code would have to be thrown out or substantially modified. No wonder HMI projects developed a reputation for being perennially late.

Software Portability

The continuing development of computing hardware and software technologies has also influenced the development of HMIs. Today's leading-edge hardware may not be available for purchase 5 years from now, and software technologies evolve with similar rapidity. This creates a real problem for companies that must develop, maintain, and evolve their products over a period of years. Avionics systems, for example, are frequently installed in aircraft that fly for decades. Customers must be confident that manufacturers will be able to support these systems for the life of the aircraft, even if today's generation of hardware is no longer available.

Software portability thus becomes one of the most important issues related to the devel-

opment of HMIs for long-lived systems. HMIs developed today must be deployable on virtually any present or future computing platform and on any present or emerging display technology.

Developing Software for HMIs

Fortunately, a new generation of software tools has been developed that is revolutionizing the development of HMIs. These virtual prototyping tools - which include VAPS, a product of my own company, Virtual Prototypes, Inc. (VPI) - have been developed to help companies interactively design, develop, build, test, and deploy HMIs for a wide variety of applications and platforms in a graphical, interactive, point-and-click fashion.

Users begin by drawing the graphical elements of their application. As the graphical elements are developed, they can be assigned functionality from among a large number of behaviors known to the virtual prototyping system. This converts the static graphics of a traditional prototype into dynamic objects. Objects thus become, for example, dials, lights, knobs, or switches, depending on the developer's requirements.

In the VAPS implementation, each type of object has characteristic data entry or exit points called "plugs," which can be connected to channels that transport data between the objects and between processes. The visual representation of object plugs and of channels allows for data connections to be performed in a point-and-click fashion. Event-based logic can also be defined in a point-and-click fashion.

Once the graphical, behavioral, data-manipulation, and logical elements of an HMI have been developed, they can all be tested in an integrated, interactive fashion within the virtual prototyping development environment, where the HMI will behave exactly as it will in the final product. Should changes be required, the various elements of the HMI can be edited iteratively and retested.

In our VAPS implementation, once the HMI has been developed to the user's satisfaction, the system can output the ANSI C code that exactly implements the HMI. This code, generated from the HMI, can then be cross-compiled to a wide variety of computing, graphics, and display environments, including real-time operating systems (RTOS) and ruggedized embedded systems (Fig. 2).

human-machine interfaces

The secret to an application's portability lies in the software architecture implemented uniquely by VAPS (Fig. 3). The specifics of an HMI developed by a user are encoded in the generated C code which occupies the top layer in the architecture.

The next lower layer consists of VAPS libraries which implement the functionality called for in the specific HMI the user has developed. This layer is essentially application-invariant, but has been cleverly constructed so that, when the final application is constructed by the linker, only the code required for the specific application is included in the final product. At its lowest interface, this layer makes graphics calls that are implemented by the Graphics Porting Library layer beneath it.

Cross-Platform Portability

The Graphics Porting Library layer can be used to port the VAPS graphics to a new graphics applications programming interface (API) that occupies the next lower level, immediately above the firmware and hardware on which the graphics will be executed.

This architecture allows an HMI application to be moved to a new computing environment by changing only one layer, the graphics porting layer, which is independent of the specific application. In the VAPS system, once the graphics library has been ported to a new graphics API, any VAPS application can be rehosted to that platform in a matter of minutes. Such short iteration times facilitate the

continual improvement of an HMI's quality without negatively impacting product deadlines. The graphics API hides the details of the display hardware from the applications. Thus, HMIs are easily moved to many kinds of display hardware driven by a variety of computing platforms, including PCs, UNIX workstations, and ruggedized VME or other embedded hardware. The possible display devices include traditional CRTs in a lab or AMLCD panels in aircraft or vehicles.

Because virtual prototyping systems make it easy to rehost an application to a variety of computing environments, it is now possible for a number of groups within an organization to use the same software and benefit from cross-functional portability. For example, if a manufacturer is developing an avionics product, the application can be turned into an executable program for execution on the embedded system that is to be installed in the aircraft, on a UNIX system for a variety of simulation uses, or on a PC to help in the creation of documentation.

Arrangements can be made so that all concerned users are automatically provided new versions of the executable software on the platform that is appropriate for their work. This might be done weekly or as specific milestones are achieved, enabling everyone in the organization to be working with the same software, automatically generated from the same specification.

Developing HMIs in this way gives a much larger number of people an early opportunity to work with the HMI software than would

otherwise be the case. Problems can thus be spotted much earlier in the product-development process.

Software-Investment Protection

Hardware and software technologies are constantly changing. Graphics cards, for example, are continually evolving, as are their drivers and the display devices attached to them. Last year's X/Motif becomes this year's Win32 and maybe next year's Java. Display-resolution requirements are in constant flux.

Storing the specification for an HMI independently of a specific hardware or software environment protects a customer's investment in HMI software. Of course, it must be possible to convert the specification easily into an executable for whatever hardware or software environment is chosen for the HMI product's next implementation. The ability to generate C code provides this capability.

In the VAPS system, one can define and edit the HMI visually, then store the HMI specification in a platform-independent way. The C code that implements a specific HMI is treated as an enabling step that bridges the gap between the HMI specification and the execution platform. The approach minimizes the investment required to move HMI software to a new platform. Investments in HMI software development are thus preserved while the way is paved to inexpensive product improvement as the need arises.

Conclusion

HMI designers are constantly improving the advanced data-display and control mechanisms for their products. In addition, computing and display technologies are constantly evolving, sometimes faster than complex HMIs can be built. Therefore, ease of development and software portability have emerged as paramount requirements for the development of complex HMI projects.

These characteristics are provided by VAPS, which facilitates high-quality and timely implementation of the HMIs required in large projects, allowing them to be brought to market rapidly while minimizing the risk arising from the HMI software-development process. Indeed, HMI virtual prototyping systems change the way in which HMI development is done, increasing the efficiency of an organization by encouraging more parallelism in the HMI development workplace. ■

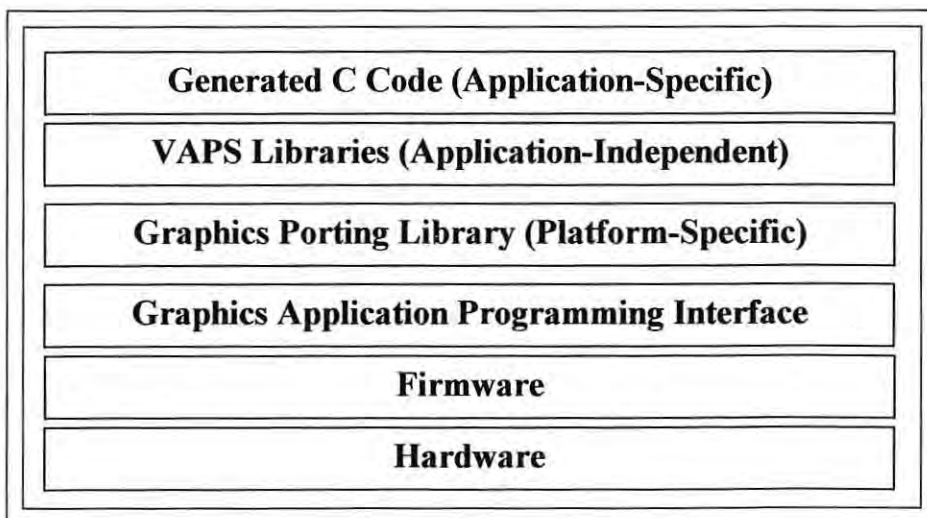


Fig. 3: Structure of a virtually prototyped HMI deployed using VAPS.

FLCs COME OF AGE

High resolution, full color, video-capable miniature displays are now shipping.

*Displaytech is the **only** licensed company in the world producing ferroelectric liquid crystals on VLSI.*

MARRYING THE PROVEN TO THE REVOLUTIONARY

Micro display and projection applications capitalize on advances in CMOS processing and recent Displaytech FLC breakthroughs. Low-cost, mirror-surfaced integrated circuit chips provide high quality, active matrix backplanes to which ultra-thin films of high speed FLCs are applied. Displaytech devices combine the latest CMOS improvements with state-of-the-art FLC materials—resulting in displays that are designed to be small, exploiting high-volume, low-cost manufacturing methods. These no-compromise, fully digital displays are ready for design integration into demanding product applications.



Wafer-based CMOS manufacturing assures cost efficiencies with established production methods. As a reflective medium for Surface Stabilized Ferroelectric Liquid Crystals (SSFLCs), this marriage has proven a superior construct for micro displays.

ULTRAFAST SWITCHING

Using standard CMOS voltages, FLC materials provide microsecond switching. This incredible switching speed enables 24-bit color at full video frame rates.

COLD STORAGE WITH HOT PERFORMANCE

Over twelve years of intensive research have yielded FLC materials usable from -5 to +70°C (-40 to +85°C storage).

READY FOR PRIME TIME CONSUMER APPLICATIONS

Displaytech production-ready ChronoColor™ Displays combine key features required for near-eye and projected applications: excellent image quality, high efficiency, lightweight construction, easy design integration, and low cost. FLCs provide significant technical advantages for battery-powered, portable, full color displays with applications in handheld devices (PDAs and digital cameras), eyeglass-mounted display systems, and more. Contact Displaytech at 1.800.397.8124.

©1998, Displaytech Inc., 303.772.2191. www.displaytech.com
2602 Clover Basin Drive, Longmont, Colorado 80503-7603.



Both front and rear projection systems are leading applications for Displaytech high resolution displays, now in production. Full 24-bit color is delivered in a convenient, flexible circuit package, shown actual size.



Displaytech ChronoColor technology delivers crisper, cleaner full screen images without scrolling or reformatting—from a panel measuring just 10.4 mm (0.4") diagonally.



Any one of reasonably a good choice never flown before. They speeds, p make it

Actual screen enlargement of a VGA ChronoColor Display. With full color on every pixel, ChronoColor technology eliminates subpixelation artifacts common with active matrix LCD triads. High fill factors exploit the full CMOS active area with no black matrix. Images are smooth and colorful, text is comfortable and continuous.

 DISPLAYTECH

Canon Shows New-Generation FLC D at FLC '97 in Brittany

After years of difficulties, Canon may have gotten the big-screen FLC D solution right.


by Bengt Stebler

IN 1987, Christian Destrade and his co-workers at the University of Bordeaux called the liquid-crystal community to the First International Conference on Ferroelectric Liquid Crystals. This initiated a series of conferences that celebrated its tenth anniversary last July, when the Sixth International Conference on Ferroelectric Liquid Crystals (FLC '97) was held in France once again. (Intervening meetings had been held in Göteborg, Boulder, Tokyo, and Cambridge, UK.)

The venue this time was the École Normale Supérieure de Télécommunications in Brest, Brittany, with organization by Professor Jean-Louis de Bougrenet and his team from the school's optics department.

Although the scientific program was dominated by research papers, it was complemented by a number of live demonstrations of FLC applications in spatial light modulators, optical correlators, and other optical devices. Several papers discussed the exciting progress in smectic FLC displays, including developments at Canon, Denso, Toshiba, and Displaytech.

Bengt Stebler is Professor of Physics at Chalmers University of Technology, Physics & Engineering Physics, Division of Microelectronics & Nanoscience, Liquid Crystal Group, S-41296 Göteborg, Sweden; telephone +46-31-772-3380, fax +46-31-772-3436, e-mail: stebler@fy.chalmers.se. His activities have been in semiconductors, magnetism, and liquid crystals.

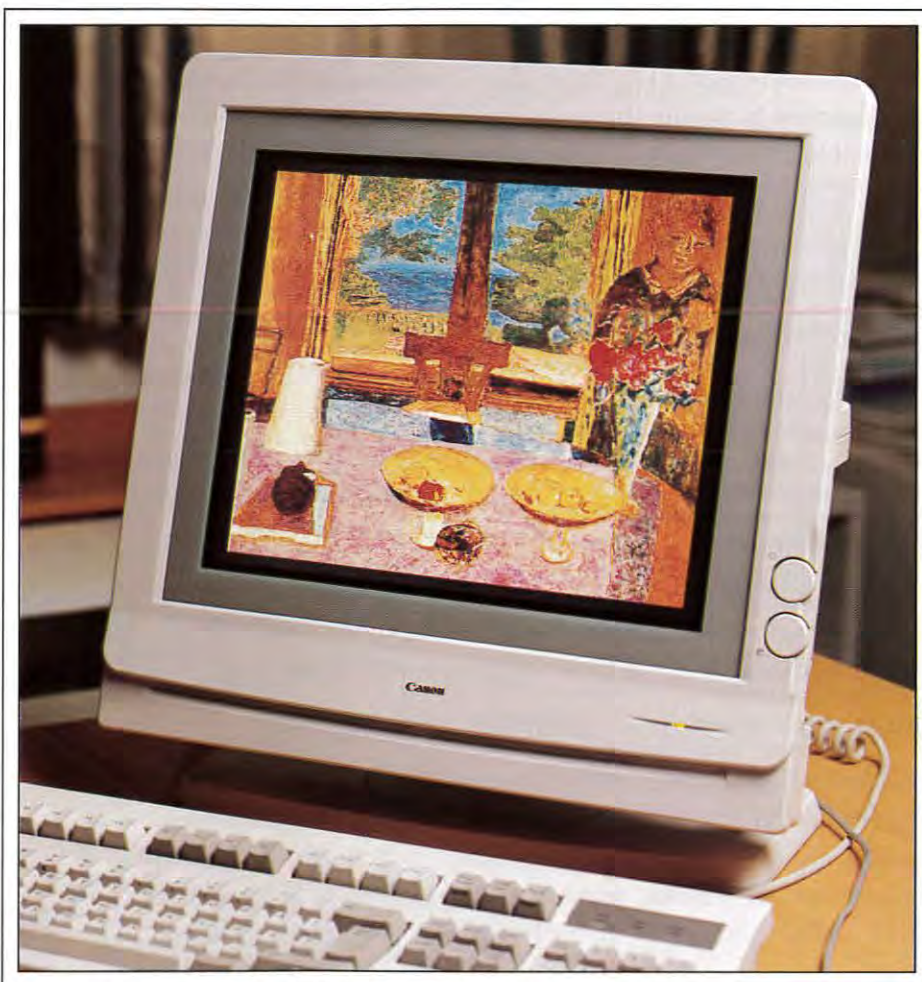

J. O. Yxell

Fig. 1: Bonnard's Dining Room Towards the Garden (1933), as shown on Canon's first-generation FLC screen. The FLC's complete absence of flicker is ideal for showing art because the screen looks much like a printed page.

Commercial Development of Ferroelectrics

It appears that there are four ways in which ferroelectric liquid crystals are being used for commercial displays. These are the passive-matrix bistable FLC, the passive-matrix anti-ferroelectric LCD, the active-matrix AFLC, and the active-matrix silicon-backplane FLC. Table 1 summarizes the companies that are involved - to a greater or lesser extent - in developing these displays.

Table 1: Summary of Display Companies and Their Interests

Company	FLCD Passive Matrix	AFLCD Passive Matrix	Silicon Backplane	AM AFLCD
Canon	X			
Casio		X		
CRL	X		X	
Displaytech	X		X	
GEC			X	
Nippondenso		X		
Samsung Display Devices	X			
Sharp	X	X		
Toppan	X			
Toshiba	X			X

The chemical companies supporting the development and production of materials for research and commercial production were also present. The leading company in ordinary FLC materials is Hoechst, which was giving away copies of their 1997 catalogue at FLC '97, while in AFLCs, Chisso seems to be the main supplier. ROLIC, a smaller FLC-material supplier, was also present.

Some electronics companies have developed their own materials: Toshiba for the active-matrix AFLC display, Canon for its passive-matrix FLC, and Displaytech for its silicon-backplane device.

- Paul Surguy

This table and the accompanying text originally appeared in a slightly different form in Stanford Resources' monthly newsletter Electronic Display World, Vol. 17, No. 8.

Large FLCs

In 1995, Canon brought the first smectic display to market. This 15-in. color display used a cell gap of only 1.1 μm and the quite extreme pretilt of 18° at the alignment surface. It used a so-called C1 chevron-layer structure (see accompanying article by Paul Surguy), and each one of the 1280 \times 1024 pixels could have 16 different color states via subdivision into four subpixels.

A spatial dithering technique called error diffusion is used to compensate for the low number of colors, and produces a reasonably

good rendition of color shades (Fig. 1). The FLC materials used are a factor of 2 from video speed, which means that they produce moving pictures only across half the screen or when scanning 512 lines.

For several years FLC researchers have been awaiting the advent of smectic-C* materials, which are characterized by a temperature-independent smectic-layer thickness. Such materials would make quasi-bookshelf (QBS) structures instead of folding the LC layers into the chevron structures that make the lives of display designers exceedingly

complicated. It now seems that smectic-C* materials have finally been engineered with a sufficiently broad temperature range to be able to replace chevron materials. This has important consequences because the QBS structure has a much higher transmittance and also allows zero pretilt. This improves the viewing angle to the hemispherical one typical for all in-plane-switching LCDs.

To show the impact of these new materials, Canon brought a demonstrator to the conference - essentially the old panel, but with some important modifications. The cell gap had been doubled to 2.0 μm , the aspect ratio had been designed for HDTV, and the screen resolution had been increased to XGA level (1024 \times 768).

Each pixel is composed of three RGB stripes measuring 100 \times 300 μm , each of which is subdivided in turn into four subpixels. This gives 16 different states per color and 4096 different color shades per pixel. The 2- μm gap will greatly simplify manufacturing relative to the panel that is currently being manufactured.

The glass plates with the new FLC material had been inserted in the old frame and were addressed by the same drivers. Because there were not enough drivers for the increased number of pixels, one picture is repeated more than three times over the full screen (Fig. 2). Nonetheless, the demonstrator succeeds in showing that FLC is capable of gray scale even if - on a fine scale - each subpixel has only two states. For this reason, Canon calls the technology "Digital Full Color." The close-up (Fig. 3) and macro close-up (Fig. 4) of the screen further illustrate how the halftones - though generated graphically - are already quite satisfactory. The new chevron-free materials allow an update frequency of 18 Hz in a gap of 2 μm . Dual scan is required for video.

The variety in the similar, but still different, QBS smectic technologies under development in other Japanese companies are equally fascinating. Professor A. Fukuda described how, after years of developing small anti-ferroelectric panels for the automotive industry, Denso Corp. finally decided to aim at large desktop panels. The company now has a prototype with a 17-in. diagonal, video speed, and the easily achievable gray scale characteristic of the anti-ferroelectric symmetric driving scheme. The company hopes to begin large-volume manufacturing in two years - the same time frame as for Canon's new panel.

conference report



Fig. 2: Canon's prototype has new, chevron-free FLC materials. Reflections are from light bulbs in the ceiling.

Bengt Stebler

At the other end of the size scale, Displaytech, Inc. (Boulder, Colorado, USA) showed their delightful full-color VGA video-speed active-matrix microdisplay using FLC on a reflective crystalline CMOS backplane. In this ChronoColor™ device, 4 bits of gray are generated in the time domain for every color. Although the optical viewer of this 8-mm-square display is still a little primitive, the potential of the device is immediately clear, not only for virtual reality but also for small high-resolution video displays, which are being developed for mobile phones of the future.

Perhaps the most fascinating presentation at FLC '97 was given by Dr. K. Takatoh from Toshiba Corp. on applications of FLC and AFLC materials to AMLCDs. Here is also an example of a rather sensational kind of materials development. If an electric field is applied perpendicular to the optic axis of a chiral orthogonal smectic material, the optic axis will tilt out. This is the electroclinic effect, which has found some uses in the QBS

geometry but has been hampered by the very small value of available tilt.

Recently, however, Mitsubishi Corp. has synthesized new materials with a tilt that is an order of magnitude higher – and achieved at a lower voltage. Part of the secret seems to be that these materials are disordered to an extent that is quite unusual in smectics. How the molecules are organized in detail was not revealed, but it looks as if the long molecular axes are tilted completely at random, giving a smectic-A structure similar to a model proposed long ago by the crystallographer A. de Vries at Kent State University.

In Japan these new materials go by the name "thresholdless anti-ferroelectrics," but scientists in the West conjecture them rather to be chiral smectic-A because of the symmetry of the phase. With regard to their very large electroclinic coefficient, one conference participant coined the name "magiclinic materials."

The Toshiba 15-in. TFT panel using these materials in a 2- μ m-wide cell gap has breath-



Bengt Stebler

Fig. 3: This close-up of the screen in Fig. 2 shows that the generation of halftones is satisfactory although there are no gray levels in the binary-mode FLC.



Bengt Stebler

Fig. 4: In this macro close-up of the same screen, each of the individual 300 \times 300- μ m pixels can be seen.

How Ferroelectric Liquid-Crystal Devices Work

Understanding the operation of the various FLCs presented at FLC '97 makes their advantages and disadvantages clear – and may even make it possible to pick winners and losers.

by Paul Surguy


FERROELECTRIC LIQUID-CRYSTAL (FLC) phases were known to exist in the mid-1970s, when researchers discovered that chiral liquid-crystal molecules form tilted smectic phases, such as the smectic-C phase.

The lack of symmetry in the tilted and layered smectic-C phase, coupled with the lack of symmetry in the chiral molecules, gives rise to a permanent electric dipole. In the bulk of such a material the molecules twist from layer to layer, forming a helix in such a way that the permanent dipole averages to zero in the bulk. However, in "Ferroelectric Liquid Crystals: A Review," *Molecular Crystals and Liquid Crystals*, Vol. 40 (1976), Bob Meyer speculated that if the helix of a smectic-C FLC could be suppressed by making the FLC layer very thin, then a macroscopic ferroelectric dipole should exist and this might have some interesting bistable properties (Fig. 1).

As shown in the figure, the molecules lie at an angle θ to the plane of the layers and can rotate around a cone. The two stable states

Fig. 1: Although their operating principle differs from that of TN-LCDs, FLCs also have (a) a bright transmitting state and (b) a dark non-transmitting state. The optical response to alternating polarity pulses (c) clearly shows the bistability of FLCs.

Paul Surguy is Senior Principal Engineer at CRL, Dawley Road, Hayes, Middlesex, UK UB3 1HH; telephone +44-181-848-9779, fax +44-181-848-6565, e-mail: psurgu@crl.co.uk. Portions of this article originally appeared in Stanford Resources' monthly newsletter Electronic Display World, Vol. 17, No. 8.

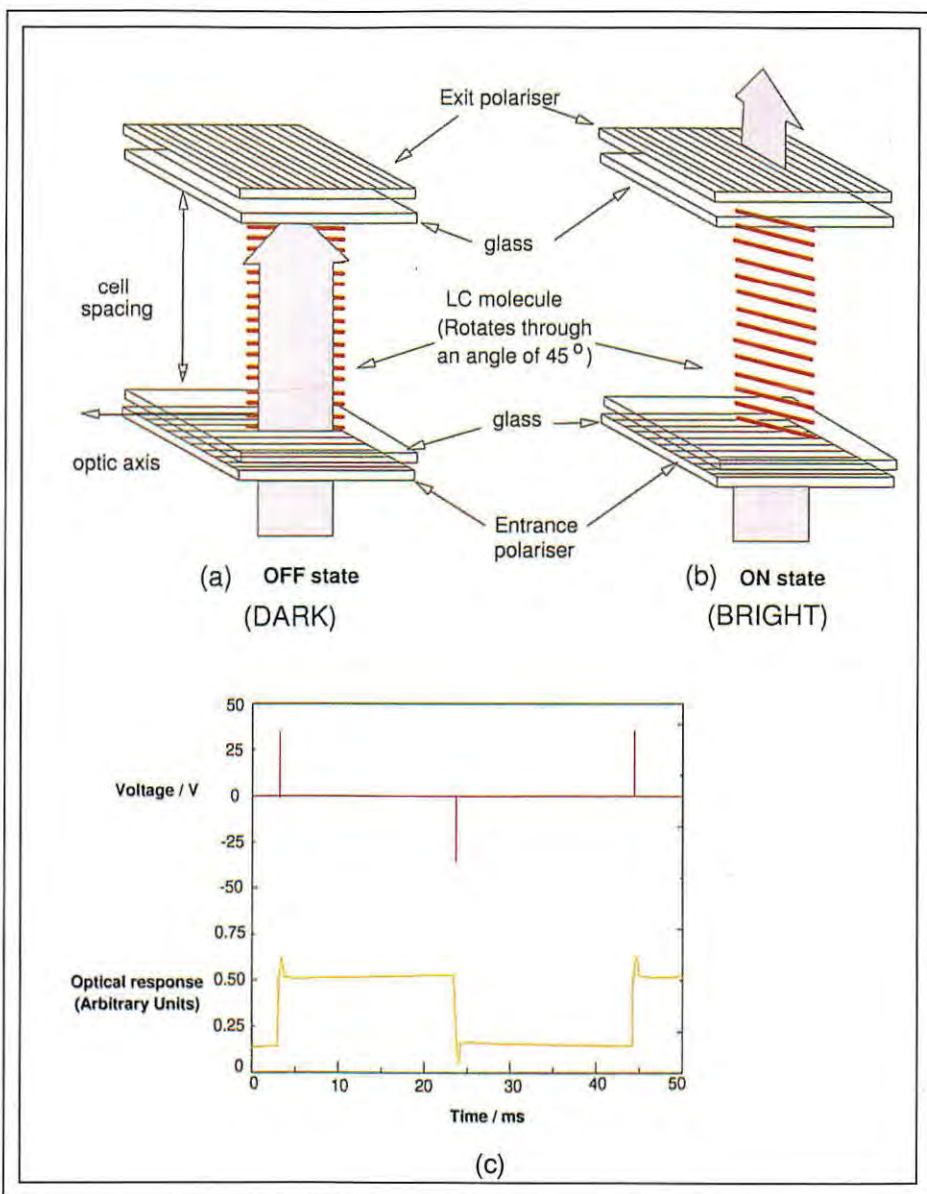

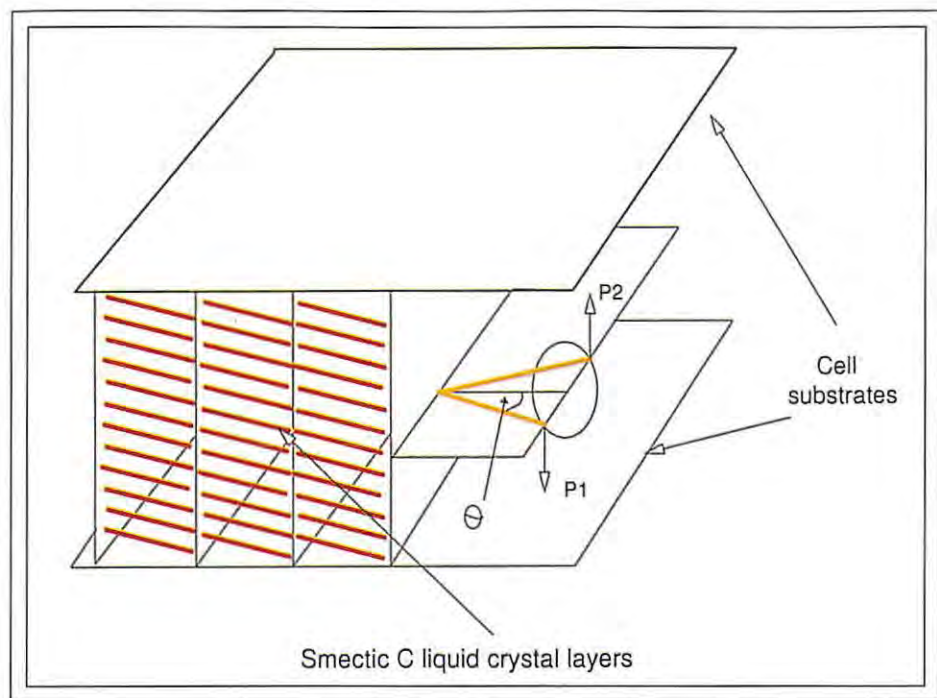


Fig. 2: Like other LCDs, the FLCD modulates the intensity of polarized light passing through it, in this case by acting like a classical half-wave plate – but one whose optic axis can be reoriented by an applied field. Light enters the FLCD through an entrance polarizer, with the light's polarization direction either parallel or perpendicular to the optic axis. The light passes through the FLCD unchanged and cannot emerge from the exit polarizer. Applying a pulse of suitable polarity reorients the FLC molecules so that the optic axis makes an angle of 45° to the incoming polarized light, which is then transmitted.

are on opposite sides of the cone and in the horizontal plane. The orientations of the ferroelectric dipoles of these two stable states are labeled P1 and P2.

Like other LCDs, the FLC device (FLCD) modulates the intensity of polarized light passing through it. The basic principle of operation is that of a classical half-wave plate with an optic axis that can be reoriented by an applied field. Light enters the FLCD through an entrance polarizer, with the light's polarization direction either parallel or perpendicular to the optic axis (Fig. 2). The light passes through the FLCD unchanged and cannot emerge from the exit polarizer, which is perpendicular to the entrance polarizer.

Applying a pulse of suitable polarity reorients the FLC molecules so that, ideally, the optic axis makes an angle of 45° to the incoming polarized light – which sets the angle $2\theta-45^\circ$. The light is then transmitted according to the equation for polarized light traveling through a half-wave plate.¹ A pulse of

opposite polarity would switch the FLCD back to the original state [(Fig. 1(c)).

This is an idealized model of the FLCD since, in practice, the surface molecules don't move as the bulk switches. As a result, there is twisting and bending of the structure, and so-called chevron structures can also arise. But the model does represent a sufficiently good approximation for considering display applications.

Advantages and Disadvantages of FLCs

The obvious advantage of the FLC effect is the existence of two stable and optically distinguishable states which can co-exist with zero applied electric field. This bistability enables information to be written on a ferroelectric display and be maintained indefinitely without consuming any further power. The same property has a particular benefit for multiplexed passive-matrix displays, in which the information is written a line at a time. In

these displays, there is no need to refresh lines where the information does not change because the FLC does not decay with time.

There is, of course, a trade-off when moving images are displayed because the lines have to be refreshed at around 25–60 Hz to prevent movement artifacts. The trade-off is between the number of lines that can be written and the refresh rate, since the number of lines that can be written in a given time is limited by the switching speed of the FLC.

Switching speed is the most frequently proclaimed advantage of FLCs, which can switch in tens of microseconds at room temperature. The switching time is very dependent on the applied electric field, and the faster switching times of a few microseconds are usually only achieved with applied voltages of more than 30 V.


A disadvantage of the FLC effect is that it is inherently binary, which makes displaying gray shades intermediate between black and white more difficult. The usual method of obtaining gray scale involves using subpixels or multiple sub-frames to dither the black and white states in either space or time to create a spatially or temporally averaged gray shade.

In the past, concerns were voiced about the mechanical stability of the FLC structure. The structure was inherently more crystal-like than nematic LC materials, and so more subject to distortion-induced flow when the FLCD was dropped or prodded. This flow disrupts the LC structure, causing the device to fail. Recently, however, more rugged display structures have been developed, which reduce the distortions experienced in ordinary use to a level where no damage results.

At FLC '97, held in Brest, Brittany, France, a range of variants for this ferroelectric technology were discussed (see accompanying article by Bengt Stebler). Here's a summary.

Passive-Matrix Ferroelectric Displays

This original – and simplest – form of ferroelectric display is the one described earlier in this article. It was the subject of numerous R&D projects in the early 1980s, but to date only Canon has taken it to market. Canon, which developed a 16-color 1280-line 15-in. display back in 1992, presented their latest prototype at Brest – a 15-in. 1024×768 display using subpixels to generate gray scale. There were four binary-weighted subpixels per color, giving a total of 4096 colors, but the

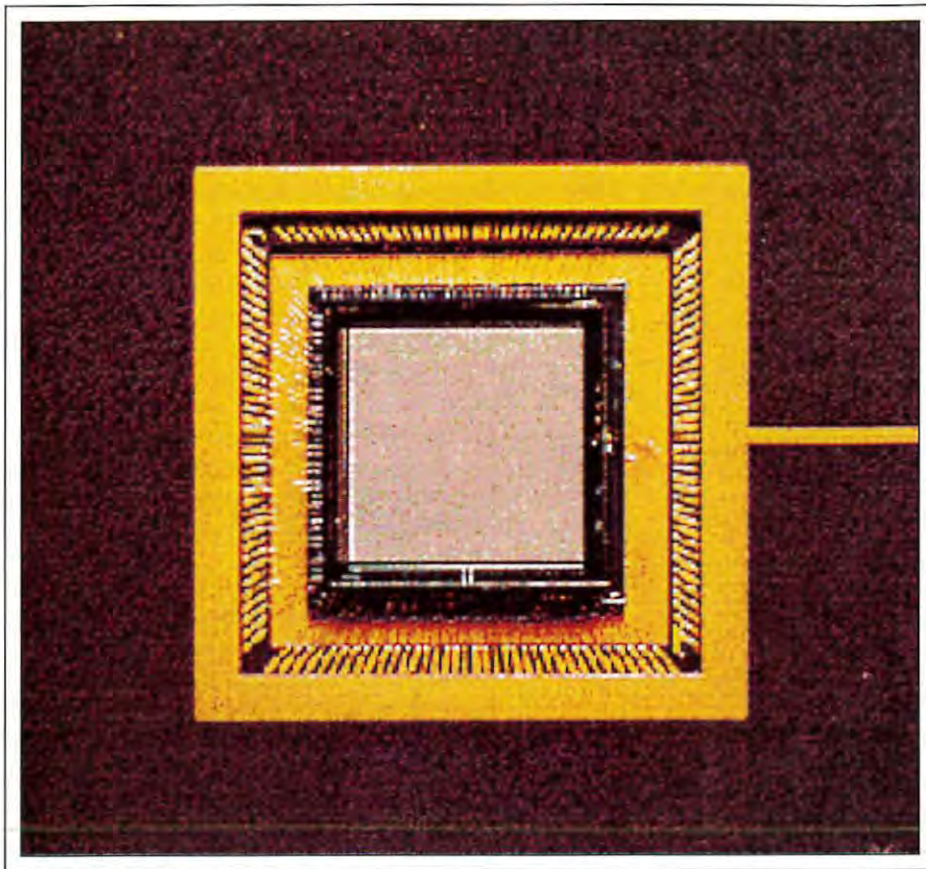

CRL

Fig. 3: Silicon-backplane FLCs are similar to active-matrix displays except that the active matrix is formed on ordinary single-crystal-silicon chips, with the FLC built on top.

aperture ratio was low at just over 50%. Canon demonstrated the panel with only a series of still-video images because the update rate of the screen was not fast enough for a full-motion-video rate.

Although passive-matrix FLCs were originally hailed as the best way of achieving large-area direct-view displays, they have not yet been proved in this application – mainly because of a lack of adequate means for producing gray scale.

Silicon-Backplane Devices

An important and longstanding use of FLCs has been in miniature displays based on single-crystal-silicon backplanes. These devices are similar to active-matrix displays except that the active matrix is formed on ordinary single-crystal-silicon chips, with the FLC built on top (Fig. 3). The advantage of these displays over conventional active-matrix

twisted-nematic (TN) displays is that they can be written with very high frame rates, making it possible to produce color on the display using the color-sequential technique rather than color filters.

In this technique, color is produced by writing a frame containing just the red parts of the picture and then flashing a red light [usually a light-emitting diode (LED)], then writing a frame of green information and flashing the green light, and finally a frame of blue information and flashing a blue light. This is done at a frame rate sufficiently high for flicker to be imperceptible to the observer.

Because these displays have no color filters, they generally have higher luminous efficiency. They also provide higher perceived resolution because the color is not split into subpixels. The same color-sequential principle can also be used for projection displays, with the flashing LEDs replaced by a color

wheel synchronized to the display and illuminated by a projection lamp. This color-wheel technology is already used in some projectors based on the Texas Instruments Digital Micromirror Device™.

Since silicon-backplane displays are limited by the size and cost of silicon wafers – and by the size of the display that can be made with a reasonable yield at a reasonable cost – this technology is restricted to miniature displays that can be used for projection and head-mounted applications.

Antiferroelectric Displays

By far the most popular topic at Brest was antiferroelectric liquid-crystal (AFLC) devices and materials. These are very similar to ordinary ferroelectric materials and devices in that they are fast, have a wide viewing angle, and show some hysteresis – often referred to as tristable switching – so that they can be multiplexed without an active matrix. Unlike ordinary FLCs, they are not fully bistable, so they have the significant advantages of being able to display analog gray scale and being driven by ac waveforms (Fig. 4).

An interesting recent development has been the use of AFLCs in active-matrix-addressed displays. This combination of technologies promises fast-switching displays (for true video rate) with excellent gray-scale fidelity.

Low-Power and Polymer Displays

One of the attractions of FLCs has been their potential for low-power portable displays: once an image is written on an FLC, no power is required to maintain it. However, apart from gray scale, two other problems have restricted the use of FLCs in these applications. One is the low contrast of approximately 40:1; the other has been insufficient ruggedness. In an attempt to overcome these drawbacks, FLCs have been incorporated into polymer networks, similar to the way in which nematic liquid crystals have been incorporated into polymer-dispersed liquid-crystal (PDLC) displays.

What of the Future?

This was one of the questions being debated in the final panel discussion at the end of the conference in Brest. The clear majority opinion was that there is a place for FLC displays – particularly in silicon-backplane devices, where high resolution, high speed, and gray

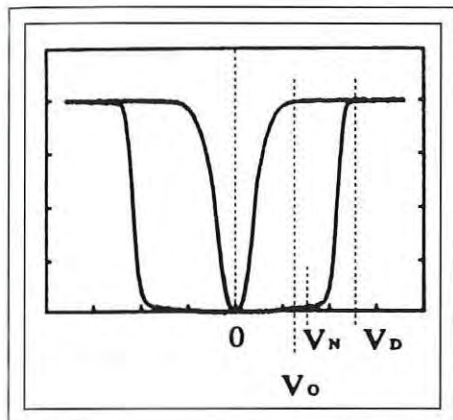


Fig. 4: Unlike ordinary FLCs, antiferroelectric LCs (AFLCs) are not fully bistable, so they can display analog gray scale. In this typical electro-optic characteristic for an AFLCD, the gray scale is selected over the voltage range V_N - V_D , V_0 being the holding voltage that maintains the selected gray level.

scale can be achieved and where there are appropriate applications in head-mounted and projection displays. As far as large direct-view displays are concerned, most attendees seemed to believe that the only route forward was to use AFLCDs on active-matrix substrates. These should be able to outperform conventional AMLCDs - which use a TN effect - in both speed and viewing angle, and thus provide the performance expected of monitors with diagonals in excess of 15 in.

Arguably, this view was confirmed by the 15-in. antiferroelectric active-matrix display that Toshiba presented - but did not exhibit - in one talk. The company said it expected to market the display in about 2 years, after the AFLC material is further developed.

When considering the longer-term future, some people suggested that the price of the silicon-backplane devices could be brought down enough for them to be used in virtual-reality games. This comment was based on the fact that the simple silicon chips used for the backplanes can be made very cheaply in large volume, and that assembly costs and liquid-crystal costs should also be relatively low.

So, for those people who are wondering what happened to ferroelectrics, the answer is that FLCs still appear to be of interest for a range of applications, including both miniature displays and large direct-view passive- and active-matrix displays, and are certainly of

great academic interest. The release of high-volume products has, however, not yet been realized. Probably the best hope for the commercialization of this enigmatic technology is the silicon-backplane miniature display.

Note

¹The equation for polarized light travelling through a half-wave plate is

$$I = I_0 \sin^2 4\theta \sin^2 \left(\frac{\pi d \Delta n}{\lambda} \right),$$

where I_0 is the transmission through parallel polarizers, θ is the tilt angle of the FLC molecule (see Fig. 1), Δn is the birefringence of the liquid crystal, d is the cell spacing (see Fig. 2), and λ is the wavelength of the incident light. ■

SID '98

Symposium, Seminar,
and Exhibition

Anaheim, California

Anaheim Convention Center

May 17-22, 1998

14⁹⁸

SEPTEMBER

Fourth International
Conference on the Science
and Technology of
Display Phosphors

BEND, OREGON
SEPTEMBER 14-17, 1998

- An international conference on the future prospects of phosphors for:
 - ELDs - FEDs
 - CRTs - Plasma Displays
 - PL Devices - LC Backlights

The Smart Choice in Digital Video Generators

ASTRO VG-826

True "Digital" Video
Generator

Dot Clock to 60MHz /
120 MHz

Operated directly from a
PC or with "Remote"
Frontpanels

Very Compact &
Lightweight

8 Bits resolution/
pixel/ color



If you service, repair, evaluate or engineer modern Flat Panel Devices, the Astro VG-826 is the Digital Generator for you.

It's small and light enough to fit in your briefcase, yet has the performance to drive any single or multiplexed Flat Panel Device with a resolution of 24 bits per pixel up to a multiplexed frequency of 120MHz.

It can be programmed and operated from a PC or with the RB-646 "Remote" frontpanel or operated only with the RB-614C Controller.

Make the *Smart Choice*...
Contact TEAM.

Call 1-800-338-1981 or visit us at
<http://www.team-systems.com>

TEAM
systems

"Test And Measurement Technology"

SMAU '97: International – and Very Italian

FPD monitors appeared in quantity at Europe's second-largest IT show, but the force was still with CRTs in Milan.

by Bryan Norris


THE International Information and Communications Technology Exhibition (SMAU) – Italy's premier information-technology (IT) trade show and Europe's second largest – was again held at the permanent Fiera Milan site, this time from Thursday, October 2, to Monday, October 6, a little earlier than usual. This 34th SMAU fair was once again larger than the previous year's. There were 2600 exhibitors (compared to 2300 in 1996), with booths occupying 86,000 m² (as opposed to 79,000 in 1996) in 24 (compared to 20) of the large halls.

Visitor numbers were slightly down at 357,000 compared to 387,000 last year, despite – or maybe because of – the brilliantly fine and warm weather. Also, the SMAU organizers had designated Friday and Monday as trade-exclusive days, allowing (theoretically) the general public in only on the other three days. Separate entrances gave the different types of visitors specific routes to suit their supposed interests.

The contention that SMAU is international was proved by the significant number of exhibitors and professional visitors coming from a host of countries: Australia, Brazil, Canada, China, Germany, Great Britain, Greece, India, Ireland, Israel, Japan, Malta,

Morocco, Portugal, Russia, Spain, Syria, Taiwan, Thailand, Tunisia, Turkey, Ukraine and, last but not least, the USA.

But having said that, the show is unashamedly Italian, both in outlook and in the product portfolios promoted. For example,

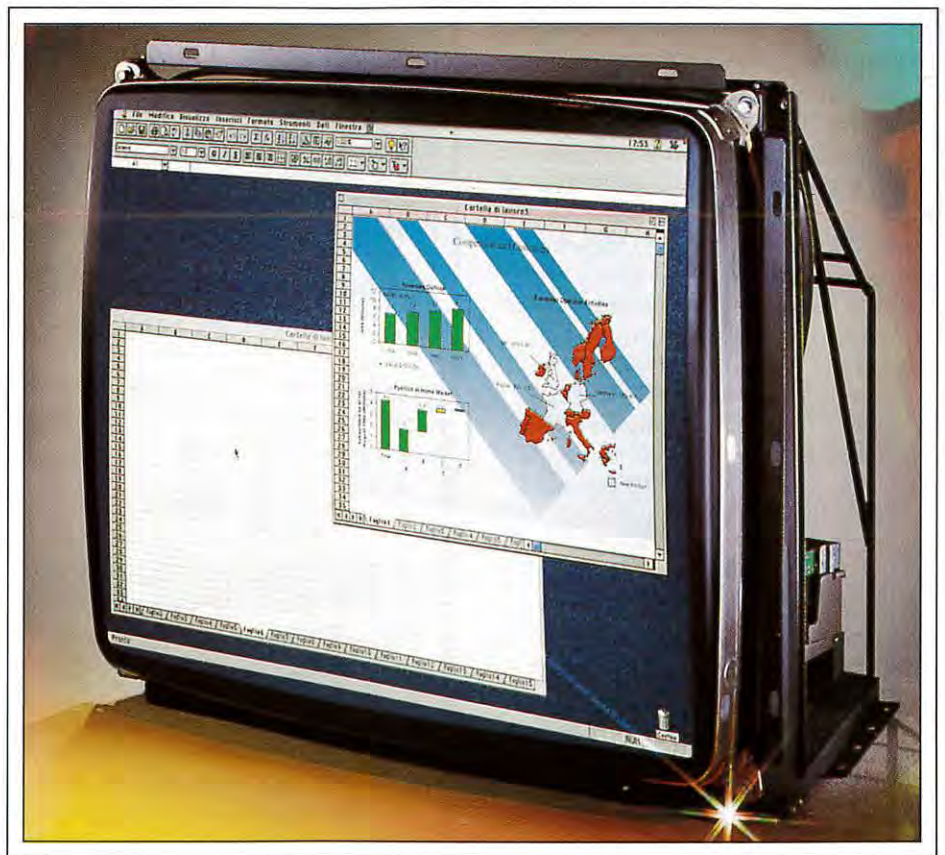

Sambers

Fig. 1: There's not much margin in the 14-in. PC monitors still popular in Italy, but several manufacturers are finding healthier margins in public-information monitors. Sambers' EV model is being used in airport installations extending from the new Malpessa Airport in Milan to Australasia.

Bryan Norris is the Senior Partner and founder of Bryan Norris Associates, Consultants in Electronics, 7 Biddenham Turn, Biddenham, Bedford MK40 4AT, U.K.; telephone +44-(0)-1234-26-7988, fax +44-(0)-1234-26-2345, e-mail: bnorris@kbn.net.co.uk. He is a contributing editor to Information Display Magazine.



Eiki

Fig. 2: Large plasma panels were being used to provide easy-to-read information on many stands at SMAU. A notable example on the Videasel stand was that from the Japanese company Eiki, which has ties to Fujitsu General.

the most popular monitor group on display was still the SVGA 14-in. with (perfectly adequate) MPR-II. By contrast, at the Orbit Show in Basel, held the previous week in neighboring Switzerland, the most popular was the high-end 17-in. with TCO '95.

To put things into a local perspective, during the second quarter of 1997, over 53% of the monitors sold in Italy were 14-in. and only 11% were 17-in. However, in Switzerland during the same period, over 50% of the color CRT monitors sold were 17-in. models and just 2.2% were 14-in.! Nonetheless, most of the new displays from the major VDU suppliers seen in Switzerland were also being exhibited in Milan, together with some unique brands from Italy itself. And there were extra products from many Far Eastern suppliers who recognize that they can sell into the much larger, although not so demanding – in terms of specifications – Italian market.

A batch of local monitor makers, introduced to you in previous SMAU show reports, contributes significantly to the expertise that Italian companies have built up in supplying the multimedia and information-display niche markets with large-screen monitors. Although CA&G still makes well over 200,000 moni-

tors a year – mostly 14- and 15-in. models – the company continues to look to its 28-, 29-, and 34-in. public-information display (PID) monitors to provide its greatest reward.

Fimi, the local and long-established production arm of Philips, has its factory at nearby Saronno, where the Philips 28/29- and 32/33-in. (16:9) PID monitors are made. Its new PID 600 model on display at SMAU is now being installed in the Frankfurt and Brussels airports. Also still produced at Saronno are **Philips'** flagship product, the Brilliance 210CS Cyberscreen[®], and the Brilliance 201 21-in. models, plus special monochrome and color 14-, 17-, 20-, and 21-in. monitors designed specifically for medical applications.

Seleco still offers its 28-in. units, but is increasing promotion of its projector ranges for multimedia applications. **Sambers** – with production up around 20% in 1997 and its phoenix-like brandname **Hantarex** now selling in 60 countries around the world – will make over 50,000 (mostly large-screen) monitors in 1997. Information-display models, such as the EV model (Fig. 1), are being used, for example, in airport installations extending from the new Malpessa Airport in Milan to Australasia. And the Sambers/Hantarex 42-

in. standalone plasma-display panel was at last going into volume production. On numerous stands at the show, large plasma panels were being used to provide easy-to-read information, which is the natural function of these products, and a notable example on the **Videasel** stand was that from the Japanese company **Eiki**, which has ties to **Fujitsu General** (Fig. 2).

FPD Monitors

In addition to state-of-the-art plasma monitors, other flat-panel-display (FPD) products took some of the limelight. The measure of excitement generated in Milan by the FPDs heralds their meaningful sales in Italy, most particularly with respect to LCD standalone monitors.

The prize for the most eye-catching stand and LCD-monitor product range must go to the Italian – yes, Italian – manufacturer **McPerson**. The host of varied and brightly colored LCD monitors on the McPerson stand – which made the neighboring **Compaq** stand look positively dull – included the TFT 10.4-in. VGA, TFT and DSTN 12.1-in. SVGA “Sierra” range, and the TFT 14.5- and 15.1-in. XGA and DSTN 15.5-in. XGA “Tango” range. All were full-featured, including OSD and multimedia (Fig. 3). Established in 1993 – and initially specializing in the production, assembly, and sales of “latest-generation” notebooks and multimedia accessories – **McPerson** is located at Pordenone, around the coast northeast of Venice. It is claimed that the new 4000-m² factory there has a production capability of over 30,000 notebooks and 60,000 multimedia monitors a year!

But the CRT Still Rules

The trusty CRT monitor was still coming up trumps at SMAU, with considerable enthusiasm being generated by the latest screen size, the 19-in. On view at the show were 19-in. models from the early suppliers, notably the CM751ET from **Hitachi** itself on its distributors' stands, **ADI's** MicroScan 6P (on distributor **Digitronica's** stand), and **Princeton's** EO90 on the crowded **Computer House** booth.

Newcomers to this screen size, **Nokia** and **Philips** each managed to show 19-in. units with unique features. The Nokia 446Xpro has a very high horizontal scan frequency (to 107 kHz), and the Philips Brilliance 109 has an optional plug-in USB module.

show report

Other companies showed they would soon be joining the 19-in. club by including their forthcoming 19-in. models on their price lists, although their products were not on display. *Acer's* 99c was to sell for Lire 1690k (US\$980); *Compaq's* V90 was listed at Lire 1924k (US\$1116); and in local PC assembler and peripherals distributor *Intercomp's* catalog, *MAG's* DJ800 was offered at Lire 2000k (US\$1160).

LG Italia, now one of the major players in the Italian-branded market, was disappointed that it was unable to show off its 99i. Although the first of these models will, like all the other current 19-in. displays, be fitted initially with the *Hitachi* tube, *LG* plans to be using its own 19-in. CRT by the second quarter of 1998.

Panasonic too was forecasting that its small-footprint own-tubed 19-in. model would

be available in the spring of 1998. In the displays section of the enormous *Panasonic* stand – which covered over half of Hall 21's floor area – a special exhibition demonstrated the company's commitment to its new range of compact tubes and, thus, monitors.

All the international monitor suppliers were naturally keen to demonstrate their other new CRT-based products at SMAU. Well-known companies such as *LG*, *Mitsubishi*, *NEC*, *Nokia*, *Panasonic*, *Philips*, *Samsung*, and *Sony* each had prestigious booths and, in addition, were also promoting their products through their various distributors.

Other international monitor houses relied on distributors to make the show visitors aware of their new models. For example, *ADI* monitors were to be seen on distributor *Digitronica's* stand, and *Daewoo* models were exhibited on the *Executive* stand. *Eizo* dis-

plays were prominent on exclusive distributor *Epson's* booth, as well as on numerous other dealer stands, and *iiyama* employed *Concordia Graphics* to promote its high-end range.

During the show, it was stated that *Hyundai* had formed a joint venture called *DHI* with its major distributor *Data Pool*. Meanwhile, *Datamatic*, which had been selling *Santron* monitors very successfully in Italy for a number of years, responded to *Samsung's* virtual withdrawal of the brand from the marketplace by delivering increasingly significant quantities of the new Korean brand *Hansol* to the Italian market.

The Pan-European trend for local PC assemblers to use a branded monitor on their PCs and to sell that brand to bring in "survival" revenues was also much in evidence in Milan. *Computer House Store* uses – and sells – *LG* and *Samsung* monitors; *Frael* has *AOC* displays; and *Intercomp* appeared to be completely converted to using *MAG* monitors on its PCs.

It was interesting to note some peculiarly Italian aspects of the Italian monitor market. *Acer's* extensive stand included a large monitor-display wall, and the wide range of models offered included the "Basic 14-in." 48-kHz unit [for Lire 379k (US\$220)] and the *AcerView* 34e and 54e 54-kHz 15-in. units [for Lire 399k (US\$231) and Lire 449k (US\$260), respectively]. *Lemon Computers* offers the "economical option" of a 48-kHz 14-in. monitor for Lire 344k (US\$200), or a 64-kHz 15-in. monitor for Lire 499k (US\$289), a 75-kHz 17-in. model for Lire 1019k (US\$591), or a (rarely sold) 85-kHz 20-in. model for Lire 2429k (US\$1409).

LG provides its 14-in. 44i for Lire 349k (US\$214) and *Samsung* the 3Ne 31.5–38-kHz 14-in. for Lire 359k (US\$248). *Semio*, the local supplier from Florence, was predicting that sales of its Taiwanese-made *Boxer* and industrial *Techno* brands would be up nearly 30% in 1997 over 1996, but that the percentage of its 14-in. sales would be down only some 5–10% from the 65% 1996 share.

On the other hand, all the international PC houses now boast a range of high-spec monitors. Local manufacturer *Olivetti*, now a subsidiary of *Piedmont*, no longer (publicly) offers a 14-in. model, just 54- and 69-kHz 15-in., 69- and 92-kHz 17-in., and 107-kHz 21-in. models! *ZDS*, still French in outlook, unveiled its new range of Korean-made moni-



McPerson

Fig. 3: Italian manufacturer *McPerson* showed a full range of attractively packaged LCD monitors at SMAU, of which this is an example.

tors at the show: one 14-in., three 15-in., and two 17-in. models. German *SNI* exhibited its extensive range of ergonomically and ecologically friendly monitors, which included the 13.8-in. LCD monitor already selling well in Europe (including Italy).

From the United States, *Compaq's* 24-in. Trinitron™-tubed P1610 and its 15.1-in. TFT500 LCD monitor were generating interest, although competing with the company's usual razzmatazz products. A fringe display product in the form of *Apple's* "Twentieth Anniversary Macintosh," the 12.1-in. SVGA LCD-PC (with 32MB expandable to 136MB, CD-ROM, etc.) was also attracting a great deal of attention. And, last but not least, *MicroTouch* used the occasion of SMAU to announce to the world an agreement with *IBM* to market a dual-branded range of one 14-in., two 15-in., and one 17-in. touch-screen monitors.

There was much to be learned at SMAU, which continues to prove its worth as one of the world's major IT shows. It is a *must* for all those interested in the Southern European display markets - and it provides that extra Italian piquancy. ■

Please send new product releases or news items to Information Display, c/o Palisades Institute for Research Services, Inc., 201 Varick Street, New York, NY 10014.

28

98

SEPTEMBER

18th International Display Research Conference (Asia Display '98)


SEOUL, KOREA
SEPT. 28 - OCT. 1, 1998

- An international conference on display research and development aspects of:
 - Display Fundamentals, Display Devices,
 - Hard Copy & Storage, Input Systems,
 - Integrated Devices and Applications,
 - Image and Signal Processing,
 - Color Perception, Human Factors

COMPUTER AIDED DRAFTING • PHOTOMASK SERVICES • PHOTO PLOTTING SERVICES

Large-Area

Photomasks

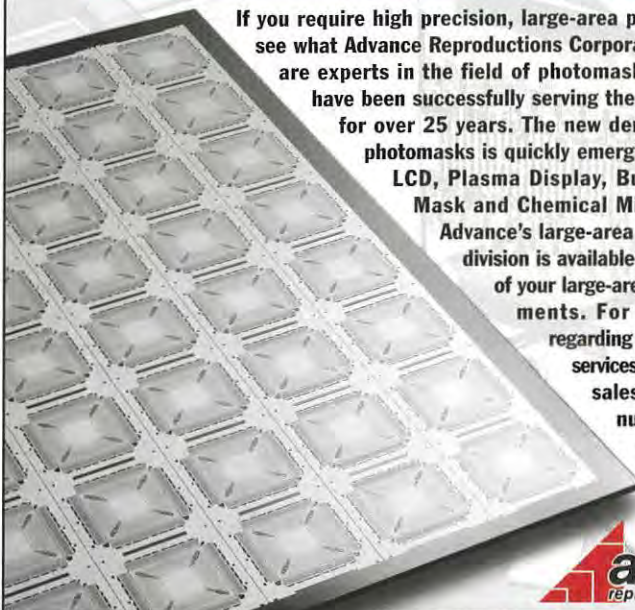

If you require high precision, large-area photomask generation, see what Advance Reproductions Corporation has to offer. We are experts in the field of photomasking technology and have been successfully serving the electronics industry for over 25 years. The new demand for large-area photomasks is quickly emerging for Lead Frame, LCD, Plasma Display, Bump Mask, Shadow Mask and Chemical Milling applications. Advance's large-area photomask services division is available to assist you with all of your large-area photomask requirements. For more information regarding all of our high quality services, contact our technical sales department at the number below or visit our web site at: www.advancerepro.com



100 Flagship Drive • North Andover, MA 01845 • Tel: 978-685-2911 Fax: 978-685-1771

Circle no. 24

License PIVOT SOFTWARE®



Your customers will see more, and you'll see more customers!

Rotate your LCD display 90, 180 or 270 degrees without quitting the active application.

Compatible with Windows® 3.1x, 95 and NT 4.0; and Mac/OS®

Great for LCD monitors, kiosks, notebooks, all-in-one and tablet computers.

For more information on licensing PIVOT SOFTWARE®, contact:
Mikel Estrin, Vice President of Sales at Portrait Displays, Inc.
Tel: +1(510) 227-2700 ext 222 FAX: +1(510) 227-2705
Email: mestrin@portrait.com Internet: WWW.PORTRAIT.COM



Circle no. 25

SID Conference Calendar

Next Show!

International Symposium, Seminar, & Exhibition (SID '98)

JOIN US IN BOSTON TO SEE AND HEAR WHAT'S NEW IN DISPLAY TECHNOLOGY.

- The Technical Program will consist of 180 original and invited papers with 80 more in a Poster Session, all organized in five parallel tracks:
 - AMLCDs and Display Manufacturing
 - Applications and LC Technology
 - CRTs and Emissive Displays
 - Applied Vision, Human Factors, Display Measurement, and Hardcopy/Imaging Systems
 - Large-Area Displays and Display Systems
- The Seminar Program will once again draw on industry leaders for three days dedicated to short courses, technology overviews, and display applications.
- Over 200 vendors will demonstrate the latest in displays, components, and equipment.
- Evening Panel Discussions, an Exhibitor Reception, a Conference Luncheon, and an evening Social Event will complement the technical program.

17 **98**
MAY
SID '98
ANAHEIM, CALIFORNIA
MAY 17 - 22, 1998

- SID's MAJOR ANNUAL EVENT
- An International Symposium, Seminar, and Exhibition - Featuring:
 - Technical Sessions - Poster Session
 - Author Interviews - Evening Panels
 - Short Courses - Applications Seminars
 - Technical Seminars - Applications Sessions
 - Product Exhibits.

14 **98**

SEPTEMBER

Fourth International Conference on the Science and Technology of Display Phosphors

BEND, OREGON
SEPTEMBER 14-17, 1998

- An international conference on the future prospects of phosphors for:
 - ELDs - FEDs
 - CRTs - Plasma Displays
 - PL Devices - LC Backlights

For additional information:

Lauren Kinsey
Society for Information Display
1526 Brookhollow Drive
Santa Ana, CA 92705-5421
714/545-1526, fax - 1547
socforinfodisplay@mcimail.com

28 **98**

SEPTEMBER

18th International Display Research Conference (Asia Display '98)

SEOUL, KOREA
SEPT. 28 - OCT. 1, 1998

- An international conference on display research and development aspects of:
 - Display Fundamentals, Display Devices.
 - Hard Copy & Storage, Input Systems.
 - Integrated Devices and Applications.
 - Image and Signal Processing.
 - Color Perception, Human Factors

17 **98**

NOVEMBER

Sixth Color Imaging Conference: Color Science, Systems & Applications

SCOTTSDALE, ARIZONA
NOVEMBER 17 - 20, 1998

- An international multidisciplinary forum for dialogue on:
 - Creation and capture of Color Images
 - Color Image reproduction and interchange
 - Co-sponsored with IS&T.

SID

Since 1962, a professional worldwide interdisciplinary society committed to the advancement of information display.

QUALITY GLASS!



- Custom Glass Melting in Platinum
- Laboratory Test Melts
- Production Volumes

VIOX considers our customers' needs for purity, service, and confidentiality all important. Look to us as a partner, able to deliver the ultimate in custom melted, fritted, or powdered glass products. We can melt to your proprietary formula, up to 2000 pounds in a single platinum pot. This provides

uniform consistency. So team up with VIOX's 40 years of glass manufacturing for a great composition.

For more information or a sample melt, contact:




VIOX
CORPORATION

6701 Sixth Ave. S.
Seattle, WA 98108
(206) 763-2170
Fax (206) 763-2577

ELECTRONIC GLASS MATERIALS

Circle no. 26

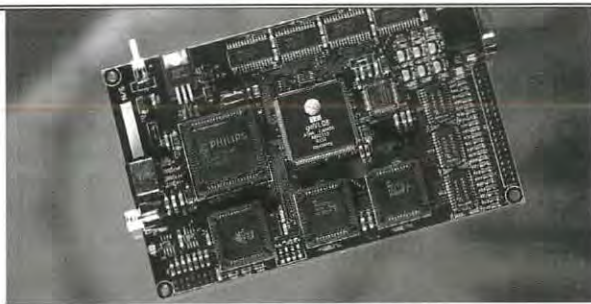

VIDEOMATE

Video to LCD Scan Converters

VIDEOMATE 3 PAL video to SuperVGA LCD scan converter card.

VIDEOMATE 4 video and VGA/SuperVGA to XGA scan converter and scaler card.

Also from Imagine Graphics - specialists in display technology:

- ★ Multi-channel graphics cards
- ★ Multi-channel MPEG-1 and MPEG-2 decoder cards
- ★ Graphics device driver development
- ★ Graphics cards and drivers for 16 x 9 plasma and CRT displays
- ★ Custom computer graphics and digital video design and development

IMAGINE
GRAPHICS

Imagine Graphics Ltd.
Lancaster House,
61 Lancaster Road,
St. Albans AL1 4ER
England


Tel: +44 (0)1727 844744
Fax: +44 (0)1727 811660
email: sales@imagine-g.com
Web Site: www.imagine-g.com

Circle no. 27

Before you buy another video test generator, take *this* test:



Will yours test high-end monitors?

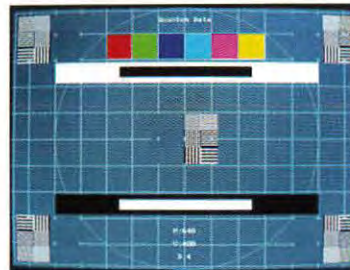

Will yours adjust sync resolution in single pixels?



Can you plug it into your PC?

Compare our Model 801GL-ISA with video test generators costing much more:

- Fully programmable, full function
- Up to 150 MHz video clock rate
- Extremely accurate and stable
- MS Windows™ interface
- Create custom images or use over 80 popular standard video formats and 60 test images on-board
- Low cost, only \$ 1995 USD

QUANTUM DATA®

2111 Big Timber Road • Elgin, IL 60123 USA
Phone: (847) 888-0450 • FAX: (847) 888-2802
URL: <http://www.quantumdata.com>
E-mail: sales@quantumdata.com

Circle no. 28

Taiwan's Largest LCM Manufacturer



Career Opportunity: FAE

- * SOLOMON Technology is ISO 9001.
- * We 100% TEST: Electrical, Visual, Optical, Environmental.
- * Lowest failure rate in the industry: Less than 1/10th of 1%.
(Failure rates to not include freight damage or misuse)
- * Over 300 standard designs to choose from.
- * We stock our most popular designs for immediate delivery.
- * Simple modifications to our standard designs to fit your special needs is not a problem.
- * Complete custom design is our specialty. From simple LCDs to ALL-IN-ONE PCB solutions to maximize cost savings.
- * State of the art COB, TAB & COG machines on line Q-1 '98 in our new Kaohsiung facility.



SOLOMON

21038 Commerce Pointe Drive, Walnut, California 91789
Sales (909) 468-3732 ext 3039 Fax (909) 869-6258

Circle no. 29

Model 875 Video Pattern Generator



Only
\$1997.00

**New. High Performance.
Small. Affordable.**

Lightweight and portable, the new Video Instruments Model 875 practically fits in the palm of your hand. Yet the number of patterns and rates that can be downloaded from your P.C. to the unit is virtually unlimited. Talk about versatile!

Call 1-800-962-8905
and we'll fax you the specs.

V.I. VIDEO INSTRUMENTS

2155 Bellbrook Avenue • Xenia, OH 45385-4043
Phone: 937-376-4361 • Fax: 937-376-2802

Circle no. 30

Increase EMI/RFI Protection with DURALAN II™

**High Performance Windows,
Lenses and Filters**

- Laminated Within the Filter
- Various Conductors Available
- Abrasion Resistant Surface
- Anti-Glare Finishes
- Various Transparent Colors
- Contrast Enhancement



SILVER CLOUD
MANUFACTURING CO.
GRAPHICS AND ELECTRONICS

For additional information call 609/825-8900,
FAX: 609/825-8969, or visit our Web site at:
www.silver-cloud.com

Circle no. 31

Compiled by EDITORIAL STAFF

Highly reflective mobile color TFT-LCD

Sharp Corp., Camas, Washington, has developed and will begin mass production of the HR-TFT Super Mobile LCD. By eliminating the backlight, this new highly reflective display uses one-seventh the power, is one-third thinner, and is 50% lighter than conventional transmission-type LCDs. The display gets brighter and easier to see as the surroundings get brighter, even in direct sunlight. It achieves a 30% reflective rate of incidental light, a contrast of 10:1, and displays 260,000 colors. The HR-TFT Super Mobile LCD is capable of displaying moving images with a high-speed response rate of 50 msec, comparable to current transmission-type LCDs. Because the display uses a highly efficient reflective function for the picture-element electrode, double images, which have been a problem with transmission types, are eliminated, even when viewing the display from an angle. Production of the HR-TFT Super Mobile LCD will begin with a 2.5-in. model for use in audiovisual products in 1998. This will be followed by models of 4-6.5 in. for use in portable information tools and by 8.4-in. models for use in mobile PCs.

Information: Sharp Electronics Corp., 5700 N.W. Pacific Rim Blvd., M/S 20, Camas, WA 98607. 1-800-642-0261, 360/834-2500, fax 360/834-8903.

Circle no. 1

Two-page color SXGA FPD

dpiX, A Xerox New Enterprise Company, Palo Alto, California, has introduced the Expression 100, a 19-in.-diagonal high-resolution color flat-panel-display (FPD) module that provides a two-page viewing area, bright saturated colors, and wide viewing angle. The largest AMLCD manufactured in North America, the Expression 100 is designed to replace bulky 20-21-in. CRT monitors. Its 1280 × 1024 workstation-class resolution and

Digital True Color™ technology support full 24-bit color, and its fast response times support full-motion video at 30 frames/sec – ideal for real-time video imaging applications. The wide field of view is achieved without compromising real-time video rates. Unlike CRTs, it is immune to magnetic fields, and it displays distortion-free images from center to corner. Sample units of the Expression 100 are currently available for under \$10,000. Production is scheduled for the first quarter of 1998.

Information: dpiX, Inc., 3406 Hillview Ave., Palo Alto, CA 94304. 650/842-9600, fax -9808.



Circle no. 2

Multimedia pivot LCD

ViewSonic Corp., Walnut, California, has announced the VPA150 ViewPanel®, a 15-in.-diagonal multimedia pivot LCD designed for applications where space, weight, and power consumption are as vital as the need for a large, crisp display. With its unique pivot capabilities through PerfectPortrait™ software, the VPA150 is ideal for spreadsheets and graphics using the regular landscape mode. When in portrait mode, the screen height is comparable to that of a standard 21-in. monitor, enabling it to display a full 8.5 × 11-in. or A4-size page of text. Its slim 6.7-in. profile takes up 75% less space than a 17-in. CRT monitor, and its low 40-W power consumption offers up to 70% in energy savings. Weighing only 12.8 lbs., the new VPA150 ViewPanel® display is extremely portable. Its high performance is due to ViewSonic's

LuCiD™ technology that combines an AMLCD with 200 nits of backlight power, supported by 1024 × 768 XGA resolution at a refresh rate of 75 Hz. Other features include OnView® controls, which guide users in making screen and LCD signal adjustments via pushbuttons and an on-screen menu; View-Match®, which helps users to match screen colors to printer output; and ViewMeter®, which takes out the guesswork in refresh-rate configuration. The VPA150 ViewPanel® is designed for both PC and Mac® systems. It has an estimated street price of \$2195 and an MSRP of \$2395.

Information: ViewSonic Corp., 381 Brea Canyon Rd., Walnut, CA 91789. 1-800-888-8583, 909/869-7976, fax 909/468-3756.



Circle no. 3

Plug-and-play miniature VGA display

Central Research Laboratories (CRL), Middlesex, U.K., has introduced the VGA2+, a video-interface version of their 640 × 480 VGA monochrome miniature display. The new device retains all of the design features of the VGA1 spatial light modulator and is now compatible with CCIR (50 Hz) and RS170 (60 Hz) video input. Measuring only 34 mm on the diagonal, the VGA2+ supports a full image at full line resolution, allowing pro-

grammable image formatting, and accepts a wide input-voltage range. The device comes complete with its own interface to allow users to simply plug and play. Full specification and pricing information will be available early in 1998. Devices will be available with no minimum order quantity.

Information: Claire Harrison, CRL, Hayes, Middlesex, U.K. +44-0181-848-6444, fax +44-0181-848-6677.



Circle no. 4

Interactive AMLCD touch-screen system

Information Display Systems, Inc., Wilmington, Delaware, has introduced the Custom-Touch™ flat-panel interactive display system for public multimedia kiosks. The AMLCD interactive touch-screen system was designed specifically for multimedia operations and as an alternative to bulky conventional CRT-based kiosks. The system features a large, bright screen that users can tilt to a comfortable viewing angle. The benefits to designers of public multimedia systems include design freedom, an attractive platform that can be incorporated into many exhibit styles, and a single screen/computer unit that allows more flexible use of display space. The advantages

to businesses and developers are easy integration into retail, lobby, trade-show, and other exhibits; significantly reduced costs; adaptability for multiple uses; and greater convenience for shipping, setup, and maintenance. The system's easy portability eliminates the need for lift trucks and full crews with carpentry skills or technical expertise in multimedia applications.

Information: Edward A. Wesolowski, Jr., President, Information Display Systems, Inc., 1514 Brandywine Blvd., Wilmington, DE 19809. 302/764-8602, fax 302/764-6609.



Circle no. 5

Portable video wall

Pioneer New Media Technologies, Long Beach, California, has introduced a fully self-contained multiscreen projection system suitable for retail, concourse, and hospitality locations. The 100-in. system, which boasts a smaller footprint and lower cost than conven-

tional multiscreen projection systems, consists of four 50-in. projection-cube units mounted together in a lightweight metal-frame cabinet with a depth of only 37 in. The system features an advanced full-function video processor with optional control and interface software. When equipped with a variable scan card, the system can display data and graphic images generated by most PCs. The modular design allows for easy servicing, and the unit can be divided into two parts for convenient transportation.

Information: Pioneer New Media Technologies, Inc., 2265 E. 220th St., Long Beach, CA 90810. 1-800-926-4329, 310/952-2111, fax 310/952-2990.

Circle no. 6

AMLCDs with multisync capability

DATA MODUL, Inc., Hauppauge, New York, has introduced their BATRON 20.1-in. color AMLCD monitor that fills the need for active-matrix displays with multisync capability. Its slim profile, small footprint, and zero emissions are ideal for crowded hospital emergency rooms and financial trading areas. Eyestrain is minimized by the monitor's quick response, superior readability, and high refresh rate, resulting in flicker-free images. The sharp contrast, lack of distortion, brilliant colors, and 1280 × 1024-pixel SXGA resolution are also suitable for CAD/CAM and graphics applications. Equivalent to a 23-in. CRT, the new 20.1-in. plug-and-play LCD monitor has a power consumption of only 72 W, about 35% of that of a CRT, and an 80° viewing angle (vertical and horizontal). BATRON monitors can be customized to meet specific customer needs.

Information: Peter Mazza, DATA MODUL, Inc., 120 Commerce Dr., Hauppauge, NY 11788. 516/951-0800, fax 516/951-2121.

Circle no. 7

Flat-panel 3-D color display

Dimension Technologies, Rochester, New York, has announced the 2012XL Virtual Window™, a 12.1-in. 1024 × 768 XGA flat-

new products

panel autostereoscopic display that allows both single and full-motion stereoscopic 3-D images to be viewed in full color. The display is housed in a cabinet that boasts a footprint about 10% that of a conventional display. The 2012XL can be used with a variety of operating platforms and accepts S-Video and standard NTSC input signals. This display provides high-quality images in true three dimensions without the need to wear special glasses or use other cumbersome viewing devices.

Information: Dimension Technologies, Inc., 315 Mt. Read Blvd., Rochester, NY 14611. 716/436-3530, fax 716/436-3280.



Circle no. 8

LED automotive-lighting assembly

Hewlett-Packard Co., Palo Alto, California, has announced the implementation of its SnapLED technology in the center high-mount stop lamps of the 1998 Ford Explorer, available in showrooms now. The assembly enables automotive manufacturers to design integrated exterior tail lamps, stop lamps, and turn lamps using LEDs instead of conventional incandescent lamps. The flexibility of the LED lighting assembly allows automotive stylists to create more innovative designs while delivering lower power consumption.

Unusually shaped thin tail lamps accommodating the curvature of the vehicle's body are now possible. Expensive sheet-metal tooling and assembly costs associated with the body cutouts required for incandescent bulbs are eliminated, allowing vehicle manufacturers to increase trunk space. The SnapLED assembly employs HP's TS aluminum indium gallium phosphide (AlInGaP) materials. The LEDs are so bright that they permit a reduction in the total number of LEDs required for tail-lamp and stop-lamp applications. Emitting true red-orange and amber, the super-bright LEDs are not dependent on lens color. The assembly is available now, with some standard-sized modules available for sale and sampling. Actual cost will vary based on design and will provide up to \$10 savings per car compared with incandescent-bulb assemblies.

Information: Hewlett-Packard Company Inquiries, 5301 Stevens Creek Blvd., P.O. Box 58059, Santa Clara, CA 95052-8059. 1-800-537-7715, ext. 9967.



Circle no. 9

Portable spectroradiometer

Photo Research, Chatsworth, California, has announced the PR-705/715 SpectraScan[®], a portable stand-alone spectroradiometer designed to quickly measure the color and intensity of light sources, displays, and reflective/transmissive samples with NIST-traceable accuracy. The PR-705 measures spectral power distributions in the visible range (380-780 nm), and the PR-715 extends the range to the near-infrared (380-1068 nm). This multiple-aperture (1-6) device is the most sensitive spectroradiometer in its class

and can measure luminance levels as low as 0.003 cd/m² (0.001 fL). One of the key features that makes the PR-705/715 an essential tool for both R&D and QC/QA testing is its ability to measure areas as small as 0.02 mm (0.001 in.) with the highest accuracy and repeatability.

Information: Photo Research, Inc., 9330 DeSoto Ave., Chatsworth, CA 91311-4926. 818/341-5151, fax 818/341-7070.

Circle no. 10 ■

Internet Consulting and Database Research

Get on the "Net." Training, lectures, Web sites, and consulting by the former Executive Director of the Internet Society. Visit the SID homepage at

<http://www.sid.org>

Database research. Patent Searches, Technical Literature, Competitive Analysis, Market Research, Demographics

H.L. Funk Consulting
7 Diane Court
Katonah, NY 10536
Telephone/Fax: 914-232-3530
E-mail:
consult@hlfunk.com

Circle no. 33

SID '98

Anaheim, California
Anaheim Convention Center
May 17-22, 1998

From the day we're born,
we go into the world
looking for what we
want with our eyes.



Almost nothing has a bigger impact on product preference than the visual performance of a display. OCLI's image enhancement technology delivers **vivid colors, high contrast** and **crisp resolution** on direct view and projection displays. The difference is an immediately visible improvement that will win over even the most discriminating customers, the moment they see it.

Contact us for more information: www.ocli.com

USA (707) 545-6440 (888) 312-0848 **EUROPE** (49) 6162-93030 **JAPAN** (81) 3-3225-8974

Circle no. 34


display continuum

continued from page 4

"Faster, sleeker, meaner"... "Sumptuous luxury and superb performance." "Responsiveness unlike any other." "An uncommon blend of classic and contemporary design."

"Live now, you've arrived..." Ah yes, here we are at the annual Seattle Auto Show. Seven hundred cars, sport-utility vehicles, and pickup trucks, and I'm determined to look

HOW WOULD YOU MEASURE YOUR DISPLAY REFLECTIONS?

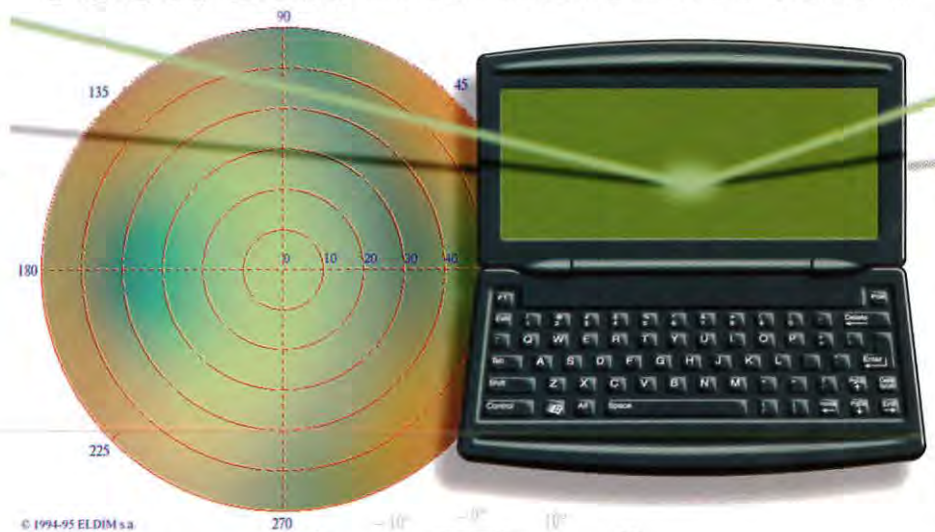

EZContrast well known display measurement solution now provides:

- > Diffuse illumination measurements
- > Specular illumination measurements
- > BRDF analysis
- > Automatic angular dynamic adjustment

Over $\pm 80^\circ$ incidence, $0-360^\circ$ azimuth angle while maintaining a measurement speed of less than **1 mn** for luminance measurements.
Compatibility with main display characteristics measurement standards (ISO, VESA...).

ELECTRONICS FOR DISPLAYS AND IMAGING DEVICES

4 rue Alfred Kastler 14000 CAEN - France
Phone : + 33 2 31 94 76 00 - Fax : + 33 2 31 47 37 77
E-Mail : eldim@eldim.fr - Internet address : <http://www.eldim.fr>



Circle no. 35

inside every one of them. The goal I have set for myself is to figure out once and for all why there has been such a lack of progress in getting electronic displays into these vehicles. And along with that I want to try to improve my accuracy for predicting what will happen during the coming decade.

I have started my self-assigned task with a preliminary calculation that if I look at ten "cars" - actually there are considerably more pickup trucks and sport-utility vehicles than traditional cars - each minute, I can cover the whole show in about the time it would take me to run a half-marathon. I won't have to cover as much distance; nevertheless, I'll have to move right along, especially if I want to allow some extra time to spend on those models which may have some really interesting displays. Fortunately, I have picked a time when the crowds are still light - but they will most likely be increasing as my tour progresses.

I move quickly from vehicle to vehicle. Most require only a momentary glance. Right away I decide to spend more time with the "concept" cars. I make the seemingly reasonable assumption that they are indicators of directions for the future. However, to my surprise, I see *less* dashboard electronics in the concept cars at this show than I remember seeing in those at shows ten years ago. Most of the emphasis appears to be on heavily sculptured shapes and what to me looks like gaudy styling. Batmobile-based inspirations are prevalent. Bright metallic colors and strangely shaped bucket seats are major trends. The dashboards are all curves and circles and other conical cross sections. But the gauges look conventional and mechanical. No flashing lights and no flat-panel displays.

I look at the new GM electric car, which is being leased in a few selected areas of the country through Saturn dealerships. I am told that the dashboard is electronic and that the display technology is LED. Since it's not turned on, I can't verify that, but the rectangular display box looks small and rudimentary.

Everywhere I look I see conventional round gauges. Finally, at the Cadillac booth I find my first electronic display. But it's the same VFD display that the top-of-the-line model has used for several years now. It's really quite a nice display, with some well-thought-out extra features, but it's only in that one model. The other Cadillac models have mechanical dashboards. The Lincoln Town Car also has a VFD that looks much like the

Cadillac's. But the other Lincolns are like the other Cadillacs - with gauges that are round and mechanical.

More fast-paced looking. By now, I'm doing better than my goal of ten vehicles each minute. Not that I'm rushing, mind you. There really isn't much interesting to see. Mostly, the cars are indistinguishable from one another. I'm beginning to feel like I am lost in a forest of giant, brightly colored metallic jelly-beans.

After a few hundred more cars, I come to the BMW booth. Aha! the gauges are conventional but the 700-series has a built-in global positioning system (GPS). Finally, an electronic display. It's a backlit LCD, just like the one I had on an Avis rental car not too long ago. Apparently, a function has come along that could not be implemented with a round mechanical gauge! The BMW implementation looks like it was inspired by one of the early James Bond movies. It's really quite nice in the way it makes the dashboard look - much classier than the Avis-installed round-post-on-the-center-console, although no different in functionality or appearance from the 5-in. display in the rental car. Well finally, I have found one example of a flat-panel-display application.

At the Mercedes booth, the only hint of electronic displays is for the odometer and outdoor-temperature displays. Not too surprising from this conservative company. But isn't the odometer rather important? Isn't that a risky place to experiment with a new technology? But then, I guess the gas or engine-temperature gauges wouldn't be any less risky.

More cars and more round mechanical gauges. I'm still having trouble accepting that the only thing new that the concept cars are offering is "batmobile" styling.

Another hundred or so vehicles blur by my now-tiring eyeballs. I think I can see the end in sight. I'm even beginning to feel about as tired as I would near the end of a mini-marathon.

One of my last stops is at the Lexus booth. Here I find another built-in GPS system, like the BMW's. It looks even better than the BMW one. The rest of the gauges are still mechanical but the lighting is impressively dramatic. The dials literally glow. Are they using supplemental soft-UV lighting? I can't tell for sure. The dashboard itself is the most impressive I've seen all day. The stereo sys-

tem is described as top-of-the-line by Nakamichi, with 280 W of audio power. But in stark contrast to the dashboard instrumentation, it has one of the worst-looking seg-

mented-LC displays I have seen in quite some time. The contrast is poor. The colors appear as a dark gray on an olive-green faintly lit background. The symbols are rudimentary



MEASURING DISPLAYS OR LEDs? WE GIVE YOU THE ENTIRE SPECTRUM!

For every application there is a perfect solution. Our range of scanning and array based spectrometers offers a new perspective in production testing, quality control and research.



With the capability to measure all of the optical parameters you need within seconds, our Compact Array Spectrometer, the CAS140B, is ideally suited for testing displays and LEDs. A wide selection of interchangeable measurement adaptors can be attached by optical fibers for unrivaled versatility.

As the market leader in LED optical test instrumentation, innovation has always been our strength. It is re-assuring to know that we offer you complete solutions for spectroradiometry, photometry, transmission/reflection and polarization measurements.

FOR THE PERFECT SOLUTION - PHONE, FAX OR E-MAIL US TODAY!

**INSTRUMENT
SYSTEMS**
OPTISCHE MESSTECHNIK

Headquarters: Instrument Systems GmbH, Germany, Phone +49-89-4549430
Fax +49-89-45494311 E-mail: info@instrumentsystems.de
North America: Instrument Systems, Canada, Phone 613-729-0614
Fax 613-729-9067 E-mail: info@instrumentsystems.com
Internet: www.instrumentsystems.com

display continuum

geometric shapes. As a representative of the display community, I am embarrassed by what I see. Any VFD would put this LCD to shame.

And that was all there was. Why wasn't

there more for us in the display community? And what about 2007? Will there be an automotive-electronics revolution and, if so, when will it happen? Perhaps, the question we must

first answer is, **What problem are we proposing to solve in attempting to replace mechanical gauges with electronic ones?**

The mechanical gauges are reliable, they are inexpensive, and they provide a crisp-looking display that can be seen under all lighting conditions. Furthermore, the mechanical gauges "feel" right in an automobile that has its roots as a mechanical creation. The radio and clock can be electronic because they are considered add-ons or accessories subject to upgrading or replacement. But the gauges, they are integral to the soul of the machine - an expression of its character and personality.

Electronic displays don't yet look and feel as robust or precise as their mechanical counterparts. In fact, one of the minor hits of the show was an automobile clock with "real hands" on it. Furthermore, electronic displays don't provide any new capability in these applications. That, of course, wasn't the case in airplane cockpits, where the proliferation of mechanical indicators was overwhelming the available front-panel space and the pilots' abilities for visual information management.

And finally, we must not forget the automotive industry's overriding drive for low component costs. If mechanical gauges are even one cent cheaper than electronic ones and if they meet the minimum functional needs, then cars will continue to have mechanical gauges. It's that simple. It's like writing a mathematical equation. The answer is unambiguous.

If dashboard gauges aren't going to benefit from electronics, then what? The natural opportunity for electronic displays in ground-based vehicles lies in adding new functions such as GPS and in enhancing the already existing ones such as built-in cell phones and audio entertainment systems. Perhaps in the future there will also be voice-responsive computers combined with heads-up displays for interactivity while the vehicle is being driven. These new functions are the ones that will benefit from various new display technologies. Of course, most police vehicles already have laptop computers permanently mounted for easy driver access, as do rental airport vans.

Getting the traditional instrument panel - with speedometer, tachometer, fuel-level gauge, and other basics - to go electronic may indeed be **like planting tulip bulbs in February**. In many parts of our world, that is a time of year when the ground is frozen hard and



THINK FAST.

**First to make it.
First to market.**

You've got to have talent, vision, and a real sense of urgency to develop products that will outlive the competitions'. And nobody knows that better than Symbol professionals. Here, we're busy deploying new technical achievements while the competition is still trying to imitate our last. Quite simply: We're better. We're faster. And we're the first.

DISPLAY ENGINEER

You will be responsible for the design, evaluation, selection and manufacturing/quality support of flat panel display technologies (LCD, LED, etc.), evaluating latest market trends and technologies preparing recommendations for usage of the particular displays for Symbol's line of mobile computing products. Work with manufacturing engineering to help increasing yield through failure analysis and with display suppliers.

Qualified applicants should possess a BSEE; MSEE preferred, along with a minimum of 5 years' experience with the principles, techniques and applications of flat panel technologies, display theory of operations as well as backlighting, technology and LCD graphic controllers. **Dept: DDE**

There has never been a better time to make the move to Symbol. In addition to the excitement and challenges associated with joining a rapidly growing and successful company, you'll receive a competitive salary and benefits package which include a 401 (k) plan. We also offer a generous relocation package, a diverse work environment and an off-site day care facility. For immediate consideration, please send/fax your resume with salary requirement to:

Symbol Technologies, Attn: Human Resources, One Symbol Plaza, MS-A12, Holtsville, NY 11742-1300. Fax: (516) 738-3814.

For more information about us, visit our website at

<http://www.symbol.com>

We are an equal opportunity employer m/f/d/v.

symbol®

the weather is cold. If you try hard enough, you may be able to dig a hole into this uninviting soil and manage to stick that bulb in the ground and cover it up. But you will most likely freeze your fingers and the bulb may never come up when spring does arrive. Trying to design and sell an electronic-display speedometer into the mainstream automotive market during the next decade may be about as difficult. The spring thaw may not occur until a lot more displays make it into cars by way of GPS, telephones, and entertainment systems. Only then, and if display costs have dropped way below what we can offer today, are we likely to see the dashboard go electronic. Can any of you see this automotive spring thaw occurring any sooner?

I know! ... Here's the answer. What we need is the electronic version of Groundhog Day. How about if each year we pick a candidate display for the automotive market. This display has to be cheaper than the mechanical gauges it seeks to replace. We will put an image of a groundhog on this display, and if the sun comes out and washes out the image so that you can't see the groundhog anymore, we will have six more years of being frozen out of the automotive market. All the news media will come. We will all dress up in fancy suits. And we will all be famous. What a splendid idea!

I fully expect to revisit this topic again in 2006 or 2007 on the tenth anniversary of the by-then-famous Electronic Groundhog Day. But if in the meantime you have some thoughts to offer regarding my prognostications, or you would like to volunteer your services to help organize this important event, you need not wait that long. In fact, I would be interested in hearing from you sooner rather than later. To respond, you can reach me by e-mail at silzars@ibm.net, by phone at 425/557-8850, by fax at 425/557-8983 or by vehicle-with-mechanical-gauges-delivered mail at 22513 S.E. 47th Place, Issaquah, WA 98029. ■

Please send new product releases or news items to Information Display, c/o Palisades Institute for Research Services, Inc., 201 Varick Street, New York, NY 10014.

SID '98

**Symposium, Seminar,
and Exhibition**
Anaheim, California
Anaheim Convention Center
May 17-22, 1998

14 ⁹⁸

SEPTEMBER

*Fourth International
Conference on the Science
and Technology of
Display Phosphors*

BEND, OREGON
SEPTEMBER 14-17, 1998

- An international conference on the future prospects of phosphors for:
 - ELDs - FEDs
 - CRTs - Plasma Displays
 - PL Devices - LC Backlights

28 ⁹⁸

SEPTEMBER

*18th International Display
Research Conference
(Asia Display '98)*

SEOUL, KOREA
SEPT. 28 - OCT. 1, 1998

- An international conference on display research and development aspects of:
 - Display Fundamentals, Display Devices,
 - Hard Copy & Storage, Input Systems,
 - Integrated Devices and Applications,
 - Image and Signal Processing,
 - Color Perception, Human Factors

17 ⁹⁸

MAY

SID '98

ANAHEIM, CALIFORNIA
MAY 17 - 22, 1998

- SID's MAJOR ANNUAL EVENT
- An International Symposium, Seminar, and Exhibition - Featuring:
 - Technical Sessions - Poster Session
 - Author Interviews - Evening Panels
 - Short Courses - Applications Seminars
 - Technical Seminars - Applications Sessions
 - Product Exhibits.

editorial

continued from page 2

is due, in no small measure, to this portfolio. It was clear that the MPT sees a Japanese technological environment that will look more like the United States' in the future, but it was also clear that centrally directed programs in which the ministries pick technology winners will still play a very large part. That puts a tremendous burden on Japan's technocrats to make the right choices.

For an extended period that ended about 5 years ago, it seemed that the very air Japanese executives and government policy-makers breathed put them in touch with cosmic economic currents, and that they could not make serious mistakes. Toward the end of that same period, the United States seemed to have irrevocably lost its way. Now the magical air seems to be blowing over North America, and all of Asia seems to be floundering.

But one thing we know about winds is that they change. Perhaps they will be blowing Japan's way when her technocrats choose their next list of winners.

- Ken Werner

We welcome your comments and suggestions. You can reach me by e-mail at kwerner@netaxis.com, by fax at 203/855-9769, or by phone at 203/853-7069. The contents of upcoming issues of *ID* are available on the *ID* page at the SID Web site (<http://www.sid.org>).

Ten reasons to go with Toddco:

1 All-Ceramic Hot Bar*
TODDCO PATENTED TECHNOLOGY

- Superior thermal uniformity
- Superior planarity (flatness)
- No voltage or current on parts or traces

2 Computer Controlled Temperature & Force

- Precise repeatability
- Reduce process variation
- Software configurable for ACF heat seal or solder applications

5 Graphical User Interface*

- Simplifies process development
- Easy to learn
- Easy to use


3 Automated Vision System*

- Speeds alignment task
- Improves accuracy and repeatability
- Fine pitch <90 micron capable
 - Upper and lower cameras

NEW!

4 Auxiliary Termocouples

- Process development tools
- Characterize the actual bond surface
- Record measured data

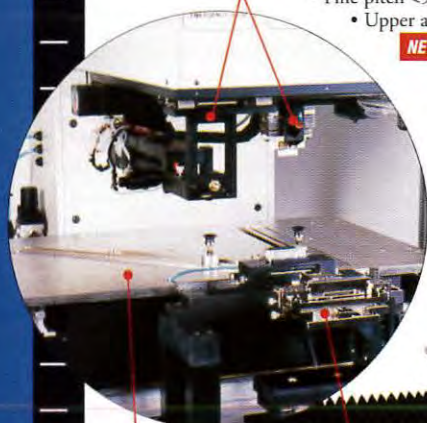

6 Universal Glass Stage*

- Accommodates variety of glass stages
- Recordable, repeatable settings for quick product change over

7 Customized Fixtures

- Optimize efficiency and quality
- Precise matching of parts and bonder
- Universal tab feature

NEW!

8 Real-Time Data Acquisition

- View and plot real-time values.
- Data for reports and quality assurance
- Part/lot histories

9 Security

- Key-lock or software password protection
- Eliminate unauthorized access or changes
- Control profile and sequence revisions

10 Selection & Service

- More price performance options
- More automation options
- Technical and application engineering support

Toddco's Flat Panel Display Workstations

offer you exclusive design features that provide the most effective and profitable flat panel repair, rework operations, high-mix production and prototyping.

Our hot bar is all-ceramic which ensures consistent temperature and pressure across the bond surface. A universal glass stage means you get faster and more accurate product change-over from model to model.

More models to choose from, more industry-specific features and more application experience than any other vendor makes Toddco General the manufacturer of choice for the flat panel industry.

Contact Toddco General today, and find out how we contribute to the success of our customers worldwide.

(619) 877-2100




Toddco General, Inc.

13535 Danielson St.
Poway, CA 92064
Fax: (619) 877-2110

E-mail:
sales@toddco.com

Web:
http://www.toddco.com

*On selected models

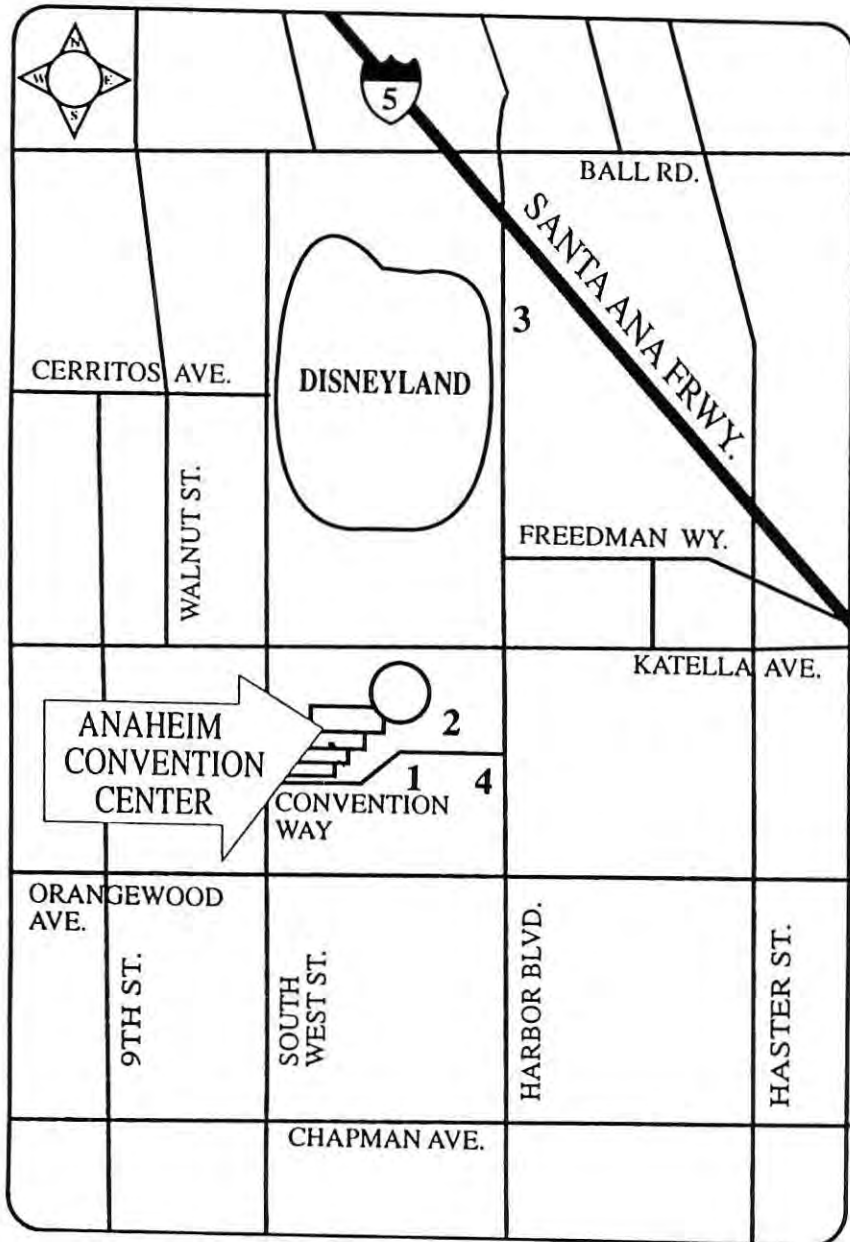

HOTEL RATES AND CODES

1. Anaheim Marriott Hotel (Headquarters Hotel)

Code: MARRI

Single: \$145.00
 Double: \$165.00
 Additional Person: \$ 20.00

2. Anaheim Hilton & Towers

Code: HILTON

	<u>Main Building</u>	<u>Lanai</u>	<u>Towers</u>
Single:	\$150.00	\$180.00	\$210.00
Double/Twin:	\$180.00	\$210.00	\$240.00
Additional Person:	\$ 30.00		

3. Howard Johnson's

Code: HOJO

Single/Double/Triple/Quad: \$69.00

4. Quality Hotel Maingate

Code: QUAL

	<u>Standard</u>	<u>Studio Suite</u>
Single/Double/Triple/Quad:	\$90.00	\$115.00

Interface Solutions for flat panels

Speed up development and product realisation time with our high quality flat panel interface controllers for your LCD, Plasma or EL projects. Suitable for small or high volume projects and monitor production.

Analog - Computer

AC series: A range of interface controllers for LCD, Plasma or EL, to connect to analog graphics source. **VGA** (640x480), **SVGA** (800x600), **XGA** (1024x768), **SXGA** (1280x1024).

SV-Series: A combination interface for both computer graphics and video (PAL, NTSC) for LCD & Plasma.

➤ **NEC analog panels** are also supported.

Digital View

USA: Tel: 408-287 4935, Fax: 408-287 3952
England: Tel: (0)1438-816 600, Fax: (0)1438-816 909
Hong Kong: Tel: 2861 3615, Fax: 2520 2987

Bus card - PC

DC series: Includes PCI bus LCD graphics card for providing LCD digital signal output from a PC.



Video - PAL/NTSC

PN series: Advanced multi system video interface for TFT LCD and Plasma panels.

Accessories: A wide variety of support accessories.

Enclosure options:

- Open frame kits: panels & interface controllers in easy to use frames.
- Industrial display systems
- Desktop monitors
- LCD multimedia systems

Internet: www.digitalview.com
Email: sales@digitalview.com


Circle no. 38

Miniature & Sub-Miniature Fluorescent Lamps for In-Flight Entertainment Displays



LCD Lighting is your best source to design and manufacture miniature & sub-miniature fluorescent lamps used as replacements or original equipment for In-Flight Entertainment Displays. Cold cathode lamps are available in standard lengths and diameters of 2.6mm to 10mm; hot cathode lamps in 8mm to 20mm.

The World Leader in LCD Backlighting...

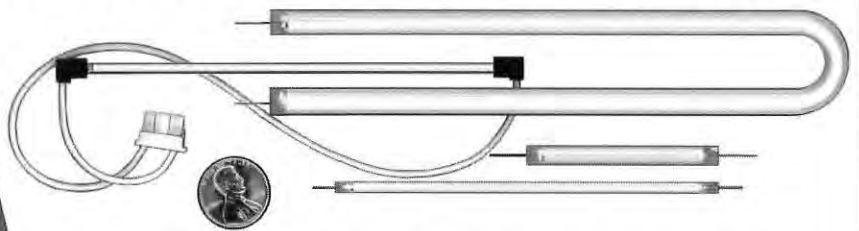

Our ability to manufacture special multiple-bend complex lamp shapes offers unique advantages to our customers.

Most importantly, we will meet your requirements and deliver the solution. LCD phosphor engineering can fulfill your chromatic requirements in standard, tri-band, or custom blend. Lamp design can incorporate any environmental, electrical, and dimming requirements.

We can also provide the wiring harnesses, connectors, or heater assemblies that accompany many of our lamps. Contact us today with your lamp needs.

LCD LIGHTING, INC.

37 Robinson Blvd., Orange, CT 06477
Phone: 203 795-1520 • Fax: 203 795-2874

Circle no. 39

sustaining members

Acer Peripherals
 Ad-Vance Magnetics, Inc.
 Advance Reproductions Corp.
 Arconium
 Brewer Science, Inc.
 Brimar Ltd.
 Canon, Inc.
 Celco
 Cherry Electrical Products
 Chunghwa Picture Tubes, Ltd.
 Clinton Electronics Corp.
 Corning Inc.
 Corning Japan K.K.
 Crystaloid LCDs
 Dale Electronics, Inc.
 Diagnostic/Retrieval Systems, Inc.
 Display Inspection Systems
 Display Laboratories
 Dolch Computer Systems
 DNP Denmark
 dpiX, A Xerox Company
 Electro-Plasma, Inc.
 Endicott Research Group, Inc.
 Epson America
 FED Corp.
 F-P Electronics
 Futaba Corp.
 General Vacuum
 Gerome Manufacturing
 GE Plastics Japan Ltd.
 Graseby Optronics
 Hewlett-Packard Co.
 Hitachi, Ltd.
 Honeywell, Inc.
 Hoya Corporation USA
 Hyundai Electronics America
 IBM Corp.
 Imaging & Sensing Technology
 Incom, Inc.
 Industrial Electronic Engineers, Inc.
 Industrial Technology Research
 Institute
 In Focus Systems, Inc.
 Infodex, Inc.
 Interface Products, Inc.
 Interserv Corp.
 Interstate Electronics Corp.
 ISE Electronics Corp.
 Kent Display Systems
 Lam Research
 Lexel Imaging Systems, Inc.
 LG Electronics, Inc.
 Libbey-Owens-Ford Co.
 LInfinity Microelectronics
 Lite Array, Inc.
 Litton Systems Canada Ltd.
 Micron Display Technology, Inc.

Micron Laser Systems AB
 Microvision Corp.
 Minolta Hong Kong Ltd.
 Mitsubishi Electronics America
 Motorola FPD Division
 MRS Technology, Inc.
 NEC Corp., Japan
 Nippon Seiki Co., Ltd.
 OIS Optical Imaging Systems, Inc.
 OKI Electric Industry Co., Ltd.
 Optical Coating Lab., Inc.
 Phosphor Technology Ltd.
 Photonics Systems, Inc.
 Photo Research
 Photonics, Inc.
 Pilkington Micronics Ltd.
 Planar Systems, Inc.
 Plasmaco, Inc.
 Polytronix, Inc.
 Progressive Systems Technology,
 Inc.
 Q.C. Optics, Inc.
 Quantum Data Inc.
 Raytheon Company
 Rockwell International
 ROLIC Liquid Crystals R&D Co.
 Schott Corp.
 Semiconductor Systems, Inc.
 Sharp Corp. - Japan
 SI Diamond Technology
 Silicon Valley Bank
 Sony Corp. of America
 Sony Corp./Corporate Research
 Labs
 Standish Industries, Inc.
 Stanford Resources, Inc.
 Supertex, Inc.
 Syntronic Instruments, Inc.
 Tamarack Scientific Co., Inc.
 TDK Corp.
 TEAM Systems
 Technoglas, Inc.
 Teledyne Electronic Technologies
 Terapixel, Inc.
 Thomas Electronics, Inc.
 Thomson Components and Tubes
 Corp.
 Toshiba America
 Ultra Electronics
 ULVAC Technologies, Inc.
 Universal Display Corp.
 Viratec Thin Films Inc.
 Wande, Inc.
 The Westaim Corp.
 Westar Corp.
 WinTron
 XMR, Inc.

index to advertisers

Advance Reproductions Corp.....	31	Optrex America.....	C2
Courtaulds Performance Films.....	11	PixTech	10
DATA MODUL.....	5	Portrait Displays.....	31
Digital View.....	47	Quantum Data	33
Displaytech.....	19	Solomon	34
Dynacolor.....	9	Silver Cloud Manufacturing Co.....	34
ELDIM.....	40	Symbol Technologies.....	42
Ergotron	6	TEAM Systems.....	3,15,27
H. L. Funk Consulting.....	38	Thin Film Device	7
Gordon and Breach.....	48	Thomas Electronics.....	35
Imagine Graphics.....	33	Three-Five Systems.....	C3
Instrument Systems.....	41	Toddeo	44
Ion Systems.....	8	Westar Corp.	6
LCD Lighting.....	47	Video Instruments.....	34
Microvision	C4	VIOX Corp.....	33
OCLI	39		

Business and Editorial Offices

Palisades Institute for Research
 Services, Inc.
 201 Varick Street, Suite 1006
 New York, NY 10014
 Jay Morreale, Managing Editor
 212/620-3371 Fax: 212/620-3379

Sales Office

Palisades Institute for Research
 Services, Inc.
 201 Varick Street, Suite 1006
 New York, NY 10014
 Erika Targum, Director of Sales
 212/620-3375 Fax: 212/620-3379

A CALL FOR PAPERS

Display and Imaging - International Edition

Editor in Chief: **Shunsuke Kobayashi**, Department of Electrical
 Engineering, Science University of Tokyo, Yamaguchi, Japan
 Tel/Fax: +81 836 88 4540

Managing Editor: **Heiju Uchiike**, Department of Electronics,
 Hiroshima University, Japan

Display and Imaging - International Edition will complement and build on the strength of its Japanese language counterpart, *Display and Imaging Japanese Edition*, which has been publishing since 1993. This new edition publishes primary papers reporting original research, review articles, tutorial papers and rapid communications. The areas covered are:

FUNDAMENTALS:- display concepts; operation principles; simulation; theory • IMAGES:- input devices; image storage; processing • MATERIALS AND ELECTRO-OPTICAL EFFECTS SYSTEMS:- materials preparation; materials synthesis; materials characterization; observations of new electro-optical effects; modeling and characterization of electro-optical effects • DISPLAY SYSTEMS:- addressing; large screen projection; displays for vehicles; 3D display systems; virtual reality systems • DISPLAY DEVICES:- CRT displays and emissive flat panel displays; nonemissive flat panel displays; peripheral components • MEASUREMENT/ EVALUATION • MANUFACTURING/ EQUIPMENT • HUMAN FACTORS/ DISPLAY ERGONOMICS • HARDS COPY/ PRINTERS

Notes for Contributors or **FREE** sample copy (when available)
 can be obtained from:

North/South America: International Publishers Distributor
 PO Box 32160, Newark, NJ 07102, USA • Tel.: +1 (800) 545-8398
 Fax: +1 (215) 750-6343 • E-mail: info@gbhap.com
Europe/Middle East/Africa: IPD Marketing Services Ltd.
 PO Box 310, St. Helier, Jersey, JE4 0TH, Channel Islands
 Tel: +44(0) 118 956 0080 • Fax: +44 (0) 118 956 8211

Visit Our Home Page:

<http://www.gbhap.com> • E-mail: Info@gbhap.com



Gordon and Breach Science Publishers
 A member of The Gordon and Breach Publishing Group





Intense

All this color in an LCD? Absolutely. The patented LCiD™, Liquid Crystal Intense Display, uses a proprietary dot matrix liquid crystal display design to give you every advantage of an LED, and more.

LCiD™ gives you a solution for applications that require features of both LCD and LED technologies. LCiD™ offers the reduced power requirements and cost efficiencies of an LCD, while it simulates the high intensity and emissivity of a typical LED. Plus, you get the added advantage of readability in direct sunlight, higher information content than

typical LEDs, and the ability to produce displays in virtually any color.

When it comes to extreme color in a cost-effective, low power package, the most intense solution is LCiD™.

As a designer and manufacturer of custom displays and display systems for the world's premier electronic OEMs, Three-Five Systems is known for its innovative solutions to tough display challenges. To learn more about how Three-Five Systems' custom display solutions can revolutionize your products and your business, please contact us.



THREE-FIVE SYSTEMS, INC.™

We Display Excellence

Three-Five Systems, Inc.
Tempe • 602-389-8600 Fax: 602-389-8801

Three-Five Systems Ltd.
Europe • 44-1793-549100 Fax: 44-1793-549135

Three-Five Systems, Inc.
www.threefive.com email: Display@threefive.com

Circle no. 40

Check what you need in your display analysis system:

- ✓ flat panel tests
- ✓ CRT tests
- ✓ easy upgrades (hardware and software)
- ✓ standard for ISO, NIDL, and VESA testing
- ✓ optimized for fast, accurate, and automatic testing with many packaged test suites


If you checked all of the above, you have chosen the Microvision SS200 Family of Display Analysis Systems

With the SS200 family, you can precisely, automatically, and completely measure display performance—and that includes flat panels.



Microvision. Innovating since 1983.

If you checked all of the above and would like more information, call Microvision at (800) 931-3188.



SS200

Complete turnkey system with computer, 6-axis positioner, monitor, software, and SS200 camera system. Automatically performs spatial and luminance measurements.



SS210

You can easily field upgrade to the more powerful SS210 package, which provides all SS200 functions, plus an integrated spectrometer for spectral analysis and color measurements. Includes response time measurement capability.



SS220

For flat panel testing, a field upgrade to the SS220 is easy. The SS220 provides spectrometer-based off-axis measurement, color analysis, color shift and luminance testing. Coupled with the SS210, this is the most comprehensive test system ever offered—at a fraction of the cost of individual test instruments. All tests are performed at NIST-traceable accuracy.

Circle no. 41

MICROVISION

Dedicated to the Needs of the Display Industry

550 High St., Suite 108 / Auburn, CA 95603
Tel: (530) 888-8344 / Fax: (530) 888-8349
Toll Free: 1 (800) 931-3188
Email: microvsn.com
Web site: <http://www.microvsn.com>

International Reps:

Japan - ARGO CORP., 06 339 3366
Taiwan - SUPERLINK TECH., 02 705 7090
Korea - B & P INT'L, 02 546 1457