


THE OFFICIAL JOURNAL OF THE SOCIETY FOR INFORMATION DISPLAY

INFORMATION DISPLAY

DECEMBER 1985

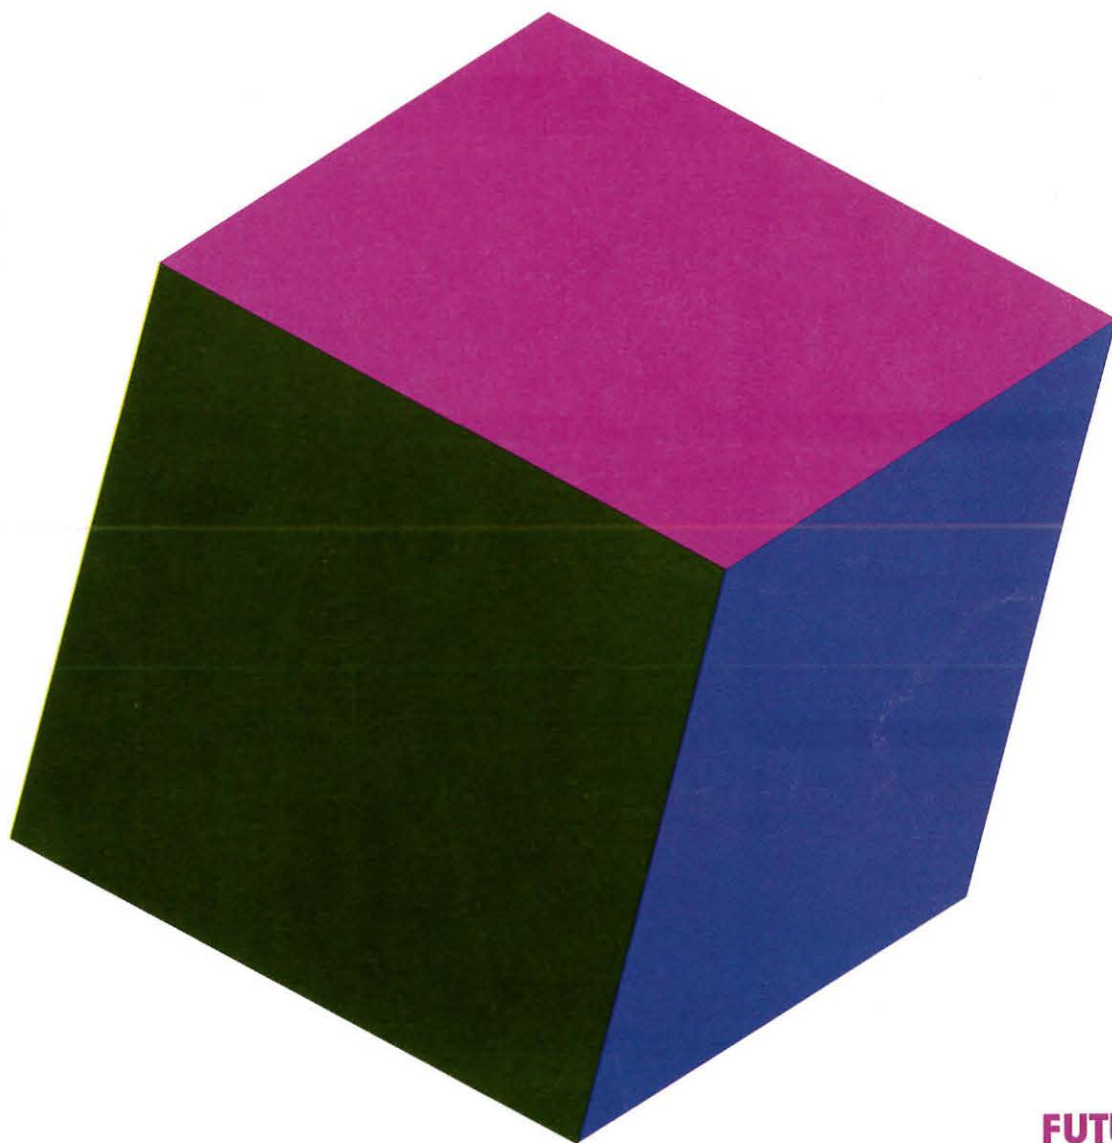

**FUTURE OF
FLAT-PANEL
DISPLAYS**

**HDTV
ON THE
HORIZON**

NON-PROFIT ORG
U.S. Postage
PAID
Permit No. 324
Framingham, MA

Designing or buying 200MHz video monitors? We have a tool made just for you.

Imagine yourself trying to design or evaluate a new color graphics monitor when the logic to drive it is still eight weeks from working!

With OPIX you can not only drive the monitor—you can create a full color graphics image similar to one your end product might produce—today!

YOU have control of the syncs, the scan rate—the video image itself. Construct a test image that will help *YOU* best during the design or evaluation phase of your monitor.

Here's what OPIX gives you:

- 1.6–200 MHz pixel rate.
- Selection of 256 colors from over 16 million.
- Text and graphics in the same image.
- Non-volatile image storage.
- RS-232 & IEEE-488 interfaces.

With all this flexibility, you might think that operating OPIX has to be a nightmare. Actually, it's quite simple. You make changes by simply pointing to values with a button and "tweaking" them with a knob. OPIX "understands" the way a video display works—so it responds as you'd expect.

If you have a project that needs a signal generator, we know you'll like OPIX. Call us. (312) 668-3301



455 E. Kehoe
Carol Stream, IL 60188
(312) 668-3301
TELEX 206 725



EMI PROBLEMS?

Who You Gonna Call?



EAGLE MAGNETIC CO., INC.
Magnetic Shields (CRT-XTM-PM) Sheet & Foil

317-297-1030

P.O. Box 24283 Indianapolis, Indiana 46224

Gun Control.

At Southwest Vacuum Devices we solve gun control problems. Prototypes. Research. Design. Manufacturing.


We sole source guns and gun components for top U.S. OEMs.

Short runs cost you money, time, productivity. That's an area in which we excel.

Use us as an extension of your own engineering and production facilities.

As a domestic supplier we are only overnight, not oceans apart.

For solutions to your gun control problems, call or write us today.

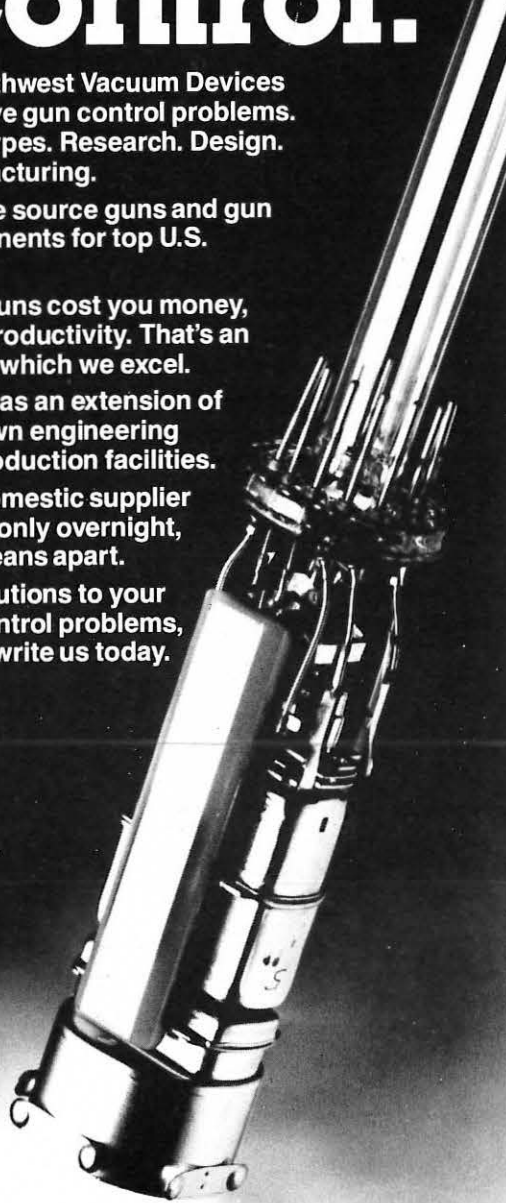

Complete Guns, Stems, Cathodes,
Other Components



SOUTHWEST VACUUM DEVICES, INC.

P.O. Box 50524/Tucson, Arizona 85703
(602) 887-7900 Telex 165-522

NATIONAL

JANUARY 16-20: ICIA '86 COMM-TEX INTL., Las Vegas, NV. Sponsored by the International Communications Industries Association (ICIA). Contact: Bobbie Hunt, International Communications Industries Association, 3150 Spring St., Fairfax, VA 22031-2399 (703/273-7200)

JANUARY 19-24: O-E/LASE '86, Optoelectronics, Laser Applications in Science and Engineering, Los Angeles Marriott & Airport Hilton Hotels, Los Angeles, CA. Sponsored by The International Society for Optical Engineering (SPIE) in cooperation with Center for Laser Studies/Univ. of Southern California, Georgia Institute of Technology, Institute of Optics/Univ. of Rochester, and Optical Sciences Center/Univ. of Arizona. Contact: O-E/LASE '86, SPIE, PO Box 10, Bellingham, WA 98227-0010. (206/676-3290)

JANUARY 21-23: Office Automation Conference, Washington, DC. Contact: AFIPS, 1899 Preston White Dr., Reston, VA, 22091 (703/620-8900)

JANUARY 23-25: 1986 SCS Multiconference, Bahia Hotel, San Diego, CA. Sponsored by Society for Computer Simulation (SCS). Contact: SCS, PO Box 17900, San Diego, CA 92117-7900 (619/277-3888)

FEBRUARY 3-7: ACM Computer Science Conference (CSC '86), Cincinnati, OH. Sponsored by Association for Computing Machinery (ACM). Contact: Lawrence A. Jehn, Computer Science Dept., Univ. of Dayton, Dayton, OH 45469 (513/229-3831)

FEBRUARY 6-8: Workshop on the Foundations of Artificial Intelligence, Las Cruces, NM. Co-sponsored by American Association for Artificial Intelligence and the Computing Research Laboratory of New Mexico State University. Contact: Derek Partridge, Computing Research Laboratory, New Mexico State Univ., Las Cruces, NM 88003.

FEBRUARY 8-15: IEEE 1986 Aerospace Applications Conference, Steamboat, CO. Contact: Dr. Russell A. Gaspari, 6656 West 87th Place, Los Angeles, CA 90045. (213/648-1325)

FEBRUARY 10-14: Short Course—Fundamentals & Applications of Lasers, Greenville, SC. Contact: Laser Institute of America, Education Dir., 5151 Monroe St., Suite 102W, Toledo, OH 43623. (419/882-8706)

FEBRUARY 17-19: Short Course—Modern Radiometric and Photometric Measurements, Orlando, FL. Contact: Laser Institute of America, Education Dir., 5151 Monroe St., Suite 102 W, Toledo, OH 43623. (419/882-8706)

FEBRUARY 24-26: Conference on Optical Fiber Communication (CFC '86), Atlanta Marriott Marquis Hotel, Atlanta, GA. Contact: OSA Meeting Dept. 1816 Jefferson Place NW, Washington, DC 20036. (202/223-8130)

FEBRUARY 24-28: Short Course—Flat-Panel and CRT Display Technologies, UCLA Extension, Dept. of Engineering and Science, Los Angeles, CA. 10995 La Conte Ave., Los Angeles, CA 90024. (213/825-3344 or 825-1295)

FEBRUARY 26-28: 5th Annual Phoenix Conference on Computers and Communications, Phoenix, AZ. Sponsored by IEEE Computer Society (IEEE/CS). Contact: IEEE Computer Society, 1730 Massachusetts Ave., NW, Washington, DC 20036. (202/371-0101)

INTERNATIONAL

JANUARY 16-20: Third Asian Aerospace Exhibition and Conference, Singapore. Contact: Kerry Gumas, CEG, 1 Maritime Square, #72-03, World Trade Center, Singapore 0409. (271-1013)

FEBRUARY 19-21: AUTOMATION TAIWAN '86, CEIDC Exhibition Complex, Sung Shan Airport, Taipei. Sponsored by the China Economic News. Contact: David Wolstenholme, American Communications Group, 8300 Greensboro Dr., Suite 690, McLean, VA 22102. (703/893-4545)

MARCH 12-19: Hannover Fair—CeBIT '86—The World Center for Office Data and Communications Technology, Hannover Fairgrounds, Hannover, West Germany. Contact: Hannover Fairs USA, Inc., PO Box 7066, 103 Carnegie Center, Princeton, NJ 08540. (609/987-1202)

MARCH 17-18: Conference on Sensors—Technology and Applications, Bad Nauheim, Federal Republic of Germany. Contact: German Section of IEEE, The Secretary, Dr. Ing. F. Coers, Stresemannallee 15, VDE Haus, D-6000, Frankfurt 70, Federal Republic of Germany. (069/6308-221)



FUTURE OF
 FLAT-PANEL
 DISPLAYS
 HDTV
 ON THE
 HORIZON

Cover: Graphic image, originally developed on a Spectragraphics workstation and printed on a Seiko video printer, represents 150 dots/inch saturated color copy available with thermal transfer printing technology.

FEATURES

Flat-panel displays poised to displace some CRT applications 11

Regardless of cogent arguments favoring CRTs, flat-panel displays can be expected to infringe on CRTs at an increasing pace, in areas that don't require the unique capabilities offered by shadow-mask CRTs.—*Elliott Schlamm, US Army Electronics R&D Command, Ft. Monmouth, NJ.*

Higher resolution, fewer artifacts are TV technology goals 12

Advances in all aspects of TV technology, and the prospect of new TV transmission media, have led to number of proposals for enhancements to present TV systems—as well as completely new systems employing more lines and wider bandwidths.—*Bernard J. Lechner, Advanced Video Systems Research Lab, RCA Laboratories, Princeton, NJ.*

Drop tests show annealing restores "abused" magnetic shields 16

A series of "drop" tests on five magnetic shield cylinders, under accurately controlled conditions, have proved that dropping a magnetic shield degrades its permeability and lowers the shielding effectiveness. But, re-annealing the degraded shield, restores optimum magnetic shielding properties.—*S.M. Kamens, President, Amuneal Mfg. Corp., Philadelphia, PA.*

Color display growth spurs development of thermal color copiers 18

To meet the growing demand for color hard-copy, generated by increased use of color information systems, a number of color printing technologies have emerged—among them the thermal transfer color process. (Cover.)

afips
 American Federation
 of Information
 Processing Societies

DEPARTMENTS

INFORMATION DISPLAY (The Official Journal of the Society for Information Display) is edited for corporate research and development management; and engineers, designers, scientists, and ergonomists responsible for design and development of input and output display systems used in various applications such as: computers and peripherals, instruments and controls, communications, transportation, navigation and guidance, commercial signage, and consumer electronics.

Editorial covers emerging technologies and state-of-the-art developments in electronic, electromechanical, and hardcopy display devices and equipment; memory; storage media and systems; materials and accessories.

Events	2	President's Message	25
Call for Papers	4	Chapter Notes	26
Industry News	5	Sustaining Members	27
Editorial	7	Advertisers Index	28
Products	21		

Call for Papers

Computer Vision

Submitted and invited papers are now being accepted for the International Conference on Computer Vision and Pattern Recognition, to be held at the Fontainebleau Hotel, Miami Beach, FL, June 22-26, 1986. Invited papers will provide an overview of research in particular areas. Submitted papers may be long, short, or poster presentations. Long papers are reserved for finished high quality work. Short papers are for continuing work with partial results. Poster presentations are for timely presentation of current research where there may be few results at the submitted deadline. All accepted papers will be published in the conference proceedings. Conference topics include, but are not limited to: 3-D vision, image understanding systems, geometrical reasoning systems, robot vision, vision hardware, and pattern analysis, among others.

For full details on submission of papers; Computer Vision and Pattern Recognition IEEE Computer Society 1730 Massachusetts Ave. NW Washington, DC 20036-1903 (202/371-0101)

Deadline for submittal: January 7, 1986.

Information Communications

Authors are invited to submit papers for presentation at the 43rd Congress of the In-

ternational Federation for Documentation (FID) to be held at the Queen Elizabeth Hotel, Montreal, Canada, September 14-18, 1986. English and French are the official languages of the Congress and authors are requested to submit two copies of previously unpublished material in either language. Papers should be limited to 10 double-spaced pages. Topics include: Advances in Communications Technology, Electronic Publishing, Electronic Document Delivery Systems, Advances in Computer Systems, and Technology transfer.

Authors should submit papers to: Mr. Elmer V. Smith, Director Canada Institute for Scientific and Technical Information Ottawa (Ontario) Canada K1A 0S2

Deadline for submittal: January 15, 1986.

Modeling and Simulation

Original papers, not previously published, are being solicited for the 7th Annual Pittsburgh Conference on Modeling and Simulation to be held at the School of Engineering, University of Pittsburgh, April 24-25, 1986. Special emphasis for the Conference will be on microprocessors, personal computer applications and software, artificial intelligence, expert systems, robotics and social, economic, regional science, and global modeling and simulation. Two copies of an abstract (50 words long) should be submitted.

Direct all correspondence to:

William G. Vogt or Marlin H. Mickle Modeling and Simulation Conference 348 Benedum Engineering Hall University of Pittsburgh Pittsburgh, PA 15261

Deadline for submittal: January 31, 1986.

Computing in Research

Participation in ACM-IEEE Computer Society, 1986 Fall Joint Computer Conference, to be held at INFOMART, Dallas, TX, November 2-6, 1986 is open to professionals concerned with computing in research, development, and applications. Original technical papers or surveys; proposals for panel discussions, tutorials, seminars, and short workshops; and poster presentations are being solicited. Papers submitted should be complete and should include an abstract. Proposals should state the subject and purpose, and indicate expected participants.

For further conference information, contact:

Dr. Stanley Winkler Conference Chair, FJCC'86 IEEE Computer Society 1730 Massachusetts Ave. NW Washington, DC 20036-1903 (202/371-0101)

Deadline for submittal: March 15, 1986.




"America's Shielding Source"

- Magnetic Shielding of all types
- Shielding grade alloys
- Total in-house design, testing and manufacturing capabilities.
- Send for our latest product literature.

Magnetic RADIATION LABORATORIES, INC.

92-A North Lively Boulevard • Elk Grove Village, Illinois 60007
Phone: 1-312-437-5200 • TWX 910-222-0225

MAKE CRT MEASUREMENTS FAST!!!! BOTH COLOR & MONOCHROME

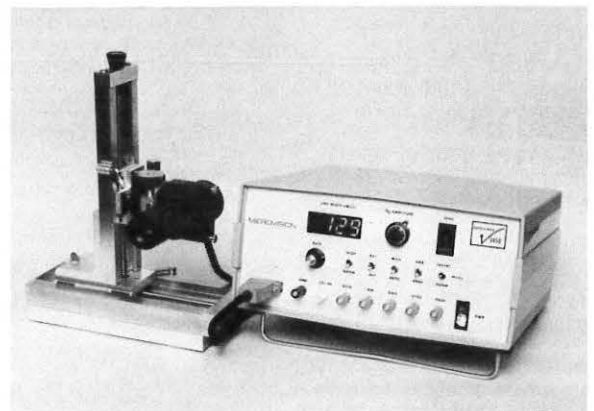

The versatile **SPOTCHEK** system will permit rapid line width measurements on Monochrome or color CRT's and.... provides all those capabilities needed for fast and **accurate** adjustments of CRT system parameters such as: convergence, focus, pincushion, raster line spacing, depth of modulation (mtf), interlace adjustment etc. For further details:

MICROVISION

4855 Atherton Avenue, Suite 201, San Jose, CA 95130
(408) 374-3158 Telex 696191 Att: MICROVISION

AFIPS to sponsor weekly TV computer series

The American Federation of Information Processing Societies (AFIPS) will be an underwriter this season for the popular weekly TV series on computer topics—"The Computer Chronicles." Hosted by computer authority Gary Kildall (designer of CP/M) and public television correspondent Stewart Cheifet, the series is broadcast on 125 public television stations throughout the nation and features discussions with leading computer innovators as well as hardware and software demonstrations. A news segment of the program includes important legislative issues relevant to the computer and information processing industry. Two half-hour shows are also planned for in-depth exploration of particular topics with leading legislators, information processing experts, corporate leaders and industry observers. AFIPS will provide "The Computer Chronicles" consultation on topics to be covered.

Contact: Katherine Jennings, AFIPS, 1899 Preston White Drive, Reston, VA 22091 (703/620-8911)

Penn and AT&T design \$8-million computer network

The University of Pennsylvania will allocate about \$8 million for AT&T to design and implement a campus-wide datacommunications network that would allow communication between any two computers. The project involves 10,000 computer work stations on a campus of 40,000 students, faculty and staff in 117 buildings. All campus computer work stations will be linked into a single optic-fiber network called PENNET. An additional \$11 million will be spent to create internal networks within each building, linking individual offices and work stations together and into the building-to-building network.

Contact: Virgil Renzulli, University of Pennsylvania, 410 Logan Hall/CN, Philadelphia, PA 19104 (215/898-8721)

Transparent metrology concept for digital signals

The National Bureau of Standards has proposed a template method for measuring signal-power to noise-power ra-

tios and distortion of digital signals that is transparent to the user. Measurements can be made without modifying or interfering with the signal and without degrading the usable channel capacity. The technique involves the use of selected patterns from the working digital data stream for analysis of performance parameters. Transparent Metrology of Signal to Noise Ratios of Noisy Band-Limited Digital Signals (TN

1077) discusses the concept. Stock No. 003-003-0Z658-1. Price: \$1.25.

Contact: Dr. Donald Halford, Division 723.05, National Bureau of Standards, Boulder, CO 80303 (303/497-3246)

Booklet outlines fire protection for electronics

Facts About Protecting Electronic Equipment Against Fire, a 24-page


**NO. 2
IN A
SERIES**

Panasonic®

**THE Image
Makers**

**COLOR
YOUR
THINKING.**

WITH PROJECTION TUBES

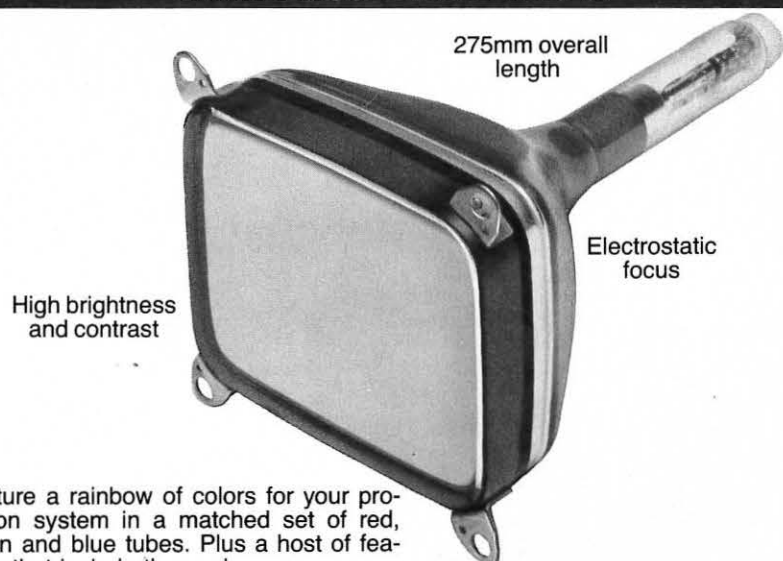

275mm overall
length

Electrostatic
focus

High brightness
and contrast

Capture a rainbow of colors for your projection system in a matched set of red, green and blue tubes. Plus a host of features that include those above.

From Panasonic...the Image Makers. For more information, contact: Panasonic Industrial Company, Computer Components Division, One Panasonic Way, Secaucus, NJ 07094. Mail Stop 4B5. (201) 348-5278.

Panasonic
Industrial Company

booklet published by Ansul Fire Protection, discusses the need for fire protection of delicate electronic equipment. Fire risks in electronic installations are analyzed, and viewpoints of the insurance industry and the National Fire Protection Association (NFPA) are examined. The booklet also includes details on the compatibility of Halon 1301 systems and water sprinkler systems, types of halon systems, fire detection and control, the testing of halon systems and the role of Underwriters Laboratories in the protection of electronics.

Contact: Sara M. Lambrecht, Ansul Fire Protection, One Stanton St., Marinette, WI 54143 (715/735-7411)

AFIPS document focuses on computers in education

The softcover edition of the Proceedings of the 4th World Conference on Computers in Education (WCCE), containing over 200 refereed papers and

summaries of tutorials and panel presentations of the conference held in Norfolk, VA, July 29 to August 2, 1985, is now available from AFIPS. The reference document focuses on computers in college, secondary and elementary education, and is targeted for those who administer, design and implement computer education curricula as well as computer education researchers. It explains how schools plan for, select, implement and evaluate computing systems, courses, curricula and strategies, explores ethical issues and technologies, provides case studies of various computer education techniques and projects. Two volumes; 1,038 pp. Price: \$50. **Contact:** AFIPS Press, 1899 Preston White Drive, Reston, VA 22091, (703/620-8937).

CAST sponsors Congress, supports INTERCOMM 86

The International Congress for Computers and Communications in Science

and Technology will be held September 15-20, 1986, at the Beijing Exposition Center in China. Sponsored by the Chinese Association of Science and Technology (CAST)—a federation of 132 Chinese associations and societies—and the China Computer Society (CCS), the Congress will run concurrently with INTERCOMM 86—The International Communications Exposition & Conference for Science and Technology, supported by CAST.

INTERCOMM's conference will consist of technical seminars offered by exhibiting companies. CAST and CCS officials expect an attendance of 10,000 targeted end users at the exposition and about 500 at the Congress. INTERCOMM incorporates the ChinaComm exposition, which was produced in Beijing in 1982 and 1984.

Contact: Show Manager, INTERCOMM, Cahners Exposition Group, 7315 Wisconsin Avenue, P.O. Box 70007, Washington, D.C. 20088 (301/657-3090)

Westinghouse CRT's have the durability and dependability to explore outer space or inner earth.

Whatever your requirements for display or recording systems, Westinghouse can build a CRT to meet them. For more than 30 years, we've used our design expertise to build durable, dependable CRT's for a wide range of applications including:

- Heads-up display
- Energy exploration

- Air traffic control
- Military monitor displays
- Phototypesetting
- Large screen projection systems
- Microfilm systems

- Medical & X-Ray
- Color recording
- Multi-function heads-down display

For solving your CRT display or recording application problems, look to Westinghouse.

Call or write Westinghouse, Industrial and Government Tube Division, Horseheads, NY 14845. (607) 796-3350.



You can be sure... if it's Westinghouse



EDITORIAL STAFF

Joseph A. MacDonald
Editorial Director

William W. Jacobus, Jr.
Consulting Editor

Lee Harrison
Associate Editor

Lindley R. Higgins, P.E.
Associate Editor

Ted Lucas
Editorial Consultant

Steve Scharf
Assistant Editor

Francine Rosenfeld
Art Consultant

For editorial information
call: 212/687-3836

EDITORIAL ADVISORY BOARD

Dr. Ifay F. Chang
Chairman
Director of Research
Institute of Systems Science
National University of Singapore

Dr. Frederick J. Kahn
Vice President
Greyhawk Systems Inc.

Koh-Ichi Miyaji
Professor
Shibaura Institute
of Technology

Jan Rajchman
Consultant

Aron Vecht
Director
Phosphor Products Co.

For membership information
call: 213/305-1502

INFORMATION DISPLAY (ISSN 0362-0972) is published monthly by MetaData Inc., 310 East 44 Street, New York, NY 10017. Telephone: 212/687-3836

Subscription: US & Canada - \$36 one year, \$64 two years, \$90 three years; Elsewhere - \$72 one year, \$128 two years, \$180 three years. Single copy: US & Canada - \$3.00; Elsewhere - \$6.00.

Permission is granted by the copyright owner for libraries and others registered with the Copyright Clearance Center (CCC) to photocopy any article herein for the flat fee of \$2.00 per copy of each article. This permission to photocopy does not extend to any special reports or lists published in this magazine. Payment should be sent directly to the Copyright Clearance Center, 21 Congress Street, Salem, MA 01970.

Copying done for other than personal or internal reference use—such as copying for general distribution, for advertising or promotional purposes, for creating new collective works, or for resale—without the written permission of The Society for Information Display is prohibited. Requests for special permission or bulk orders should be addressed to The Society for Information Display, 8055 West Manchester Avenue, Suite 615, Playa Del Rey, CA 90293. Serial-free code: 0362-0972/85 \$2.00 + \$0.00.

Copyright © 1985 by The Society for Information Display.

*"The best-laid schemes o' mice an' men
gang aft a-gley..."*

—Robert Burns

For many business (trade) publications, December and July traditionally produce some of the smallest—pagewise—magazines of the year. Although ID is no exception to this rule, size of publication belies the quality of material we've included in this month's issue.

To begin with, SID member Elliott Schlam takes a look at some of the trends in flat-panel display technologies and the potential for their market growth... a subject that we'll explore in greater depth in various issues of your Journal during the coming year (see ID September 1985, p 5).

As Elliott points out, however, ... despite great strides in flat-panel display technologies (especially within the past few years), the single-wire addressing afforded by the horizontal/vertical deflection schemes used to address cathode tube displays still makes the CRT a unique and simple-to-drive display device. Although flat-panel technologies have various inherent complexities in addressing the x-y scheme, in time response and in other characteristics, Schlam projects that flat-panel displays will "infringe on CRTs at an increasing rate—in areas that don't require the unique capabilities offered by shadow-mask CRTs."

SID member Bernard Lechner, in another article, analyzes High-Definition Television (HDTV) potential for reaching the consumer market in the near future. His conclusion: while HDTV technology admittedly is ready, transmission capabilities have yet to catch up with the display technology.

In his article on magnetic shielding, SID member S.M. Kamens examines the effects of mishandling, or abusing, magnetic shields. His article explains an accurately controlled testing program to measure the effectiveness of five magnetic shields that were subjected to controlled repetitive drops from a uniform height and under similar conditions—both with and without annealing between drops. Evaluation of test results clearly shows an obvious reduction in shielding performance based on continuous misuse (or abuse) created by dropping. When samples were re-annealed, degraded shields apparently regained optimum magnetic shielding properties.

* * *

With the January issue of ID, we'll begin our regular monthly coverage of various flat-panel display technologies—starting with an overview of the next generation of LCDs by Allan R. Kmetz, in which he explores such problems as LCD addressing, new LCD effects, active substrates and other characteristics. And, in the same issue, we'll take a look at some applications of LCDs in business and scientific display systems.

Also, in the January issue of ID, we're launching a new section that each month will feature the profile of a newly elected Sustaining Member of your Society, along with a number of short sketches on long-standing Sustaining Members. Our ultimate goal is to provide ID readers with background information on every Sustaining Member of the Society, and then to package this information, for the display community at large, in an Annual Directory of SID Sustaining Members: Services & Products.

We sincerely hope each of you will respond favorably to our efforts.

Joseph A. MacDonald
Editorial Director

Predoctoral fellowship and professional internship offered

Charles Babbage Institute, University of Minnesota, is accepting applications for a Predoctoral Fellowship and a Professional Internship. The fellowship, to be awarded for the 1986-87 academic year, is available to graduate students whose dissertation will address some aspect of the history of computers and information processing. Thesis topics must be chosen from, but are not limited to, the infrastructure of the information processing industry, and specific technological developments in the information sciences, including both hardware and software. The stipend will be \$5,000 plus an amount up to \$2,500 for tuition, fees, travel, and other research expenses. Fellows may reapply for up to two one-year continuations of the Fellowship.

Fellowship applications should include biographical data and a research plan, three letters of reference, certified transcripts of college credits and GRE

scores (or their equivalents abroad) to be sent directly to the Institute. The Professional Internship, to be awarded for a period of three to nine months between June 1, 1986 and May 31, 1987, is available to professional people interested in an introduction to the history of information processing. Applicants may include historians and social scientists, or records managers and archivists. Residence at the Babbage Institute is required. The stipend for the internship is \$1,000 per month.

Internship applications should include biographical data, a statement of interests, a proposal of dates during which the internship would be held, and the names, addresses and telephone numbers of three references.

No special application forms are required. Applicants should send their materials to the Charles Babbage Institute, University of Minnesota, 104 Walter Library, 117 Pleasant St. S.E., Minneapolis, MN 55455.

Deadline for filing applications is January 15, 1986.

Travel grants offered to IFIP's Computer Congress

The American Federation of Information Processing Societies (AFIPS) will offer travel grants to IFIP '86, 10th World Computer Congress on September 1-5, 1986, in Dublin, Ireland. The conference will focus on examining the legal, social, cultural and economic problems related to information applications. Partial travel support for about 75 participants in the Congress will be available under an NSF grant. Applications for these grants are now being accepted. Selection will be based on applicants' contributions to computer and information processing sciences.

Contact: AFIPS Communications Department, 1899 Preston White Drive, Reston, VA 22091, Attention: IFIP Congress '86 Travel Grants. (703/620-8914)

Deadline for submitting application is March 1, 1986.

WHAT'S HAPPENED TO OLD FASHIONED STANDARDS?

SPTC's in-house product durability and reliability tests have always exceeded industry standards.

In the field of special purpose CRT's, our performance meets your design applications for a wide range of display requirements, including:

- Fiber optics for fast hard copies
- Ultra-high resolution displays
- Sub-miniatures for avionics
- Custom geometrics as in CAD/CAM



Call or write: SPTC, Inc.
14746 Raymer Street
Van Nuys, California 91405
(818) 989-4610 (213) 873-5107

SPTC INC.

With special purpose technology standards are always built in.
Ask our customers ... they know.

Flat-panel displays poised to displace some CRT applications

Despite the great strides in flat-panel display technologies within recent years, the Cathode-Ray Tube continues to serve as the primary display mechanism for applications requiring more than a limited amount of alphanumeric characters... such as found in calculators and the like. Not only does the CRT maintain this status, but also its quality and breadth of application are growing.

Flat-panel constraints

Multi-element addressing or multiplexing flat-panel displays, in general, is not a simple task. The basic problem lies in implementing an x-y addressing scheme to select particular picture elements—with the limitations of selecting only one row or column at a time, to avoid redundancy. Complicating the problem are the system's time response, electrical/optical cross-coupling, voltage-current requirements, and voltage output characteristics of the various flat-panel technologies.

Each technology has certain specific requirements for satisfactory multiplexing, thus a number of different techniques have evolved. Plasma and electroluminescent technologies can use simple x-y schemes but require voltages in the 110V-200V range. Liquid crystals, on the other hand, work in a lower voltage range, but cover a much broader range of multiplexing difficulties, depending upon size, resolution and display characteristics required.

Plasma displays

The most advanced flat-panel display

by Elliott Schlam
US Army Electronics R&D Command
Ft. Monmouth, NJ

technologies are the dc, ac, and hybrid ac/dc plasma displays. One reason for this is the relatively straightforward multiplexing characteristics of such displays, with resolution being limited only by system construction.

Plasma displays have been developed that range in size from a single line of alpha-numeric characters to a 60x80-cm, 1200x1600-element panel. Display phenomenon consists of a discharge of light that occurs when a threshold voltage is exceeded in a specific gas mixture. Construction and electro-optical details of plasma displays are specific to the technology and dictate, to a certain degree, their cost and areas of application.

Liquid crystal displays

Liquid crystals completely dominate calculator-like applications; however, advances are now pushing the liquid crystal toward considerably more complex computer and imaging applications. One of the primary problems that has limited the use of liquid crystals in these advance applications has been extreme multiplexing difficulties due to undesirable response-time and electro-optical characteristics.

Advances in construction techniques in various liquid crystal technologies—including twisted nematic and phase-charge phenomena—as well as in intrinsically adding non-linear multiplexing elements such as metal-insulator-metal and thin-film-transistor devices have aided in improving system multiplexing. There are numerous tradeoffs in the operational mode and multiplexing mechanisms that impact producibility, cost, and operational characteristics—all of which have a direct effect on where and how liquid crystal displays will be used.

Electroluminescent displays

The ac-thin-film and dc-powder electroluminescent displays have progressed to the point where they can be used effectively in computer applications. Because they are lighter and less power-hungry than plasma displays, EL devices may fit into a broader range of mid-level computer requirements. The ease of showing live television with currently available integrated drivers adds to the EL's versatility.

In certain respects, the ac-electroluminescent device is a solid state analogue to the ac-plasma panel, although fabrication, multiplexing, and electro-optical characteristics are distinctly different.

Future prospects

Regardless of cogent arguments favoring CRTs, flat-panel displays can be expected to infringe on CRTs at an increasing pace, in areas that don't require the unique capabilities offered by shadow-mask CRTs.

It is reasonable to expect plasma displays to further grow in size, experience some cost reduction and ultimately add color capability. Further progress in multiplexing liquid crystal displays is expected, although the multitude of technological approaches and their impacts makes the ultimate future of liquid crystals somewhat cloudy.

The degree of expected price reductions and further reduction of power consumption in electroluminescent displays will determine how far-reaching their future impact will be.

(Article developed from *Trends in Flat-Panel Display Technologies*, by Elliott Schlam, US Army Electronics Research & Development Command, Ft. Monmouth, NJ—presented at Electronic Imaging '85, Boston, MA, SPSE & IGC.)

Higher resolution, fewer artifacts, TV technology goals

Advances in all aspects of TV technology—from camera optics to kinescope phosphors—and the prospect of new TV transmission media, such as Direct Broadcast Satellites (DBS), have led to a number of proposals for enhancements to present TV systems as well as completely new systems employing more lines and wider band-width.

Although today's systems have served us well, the trend toward larger screen sizes begs for more resolution. At a viewing distance of 9 ft., typical for most home viewing, the limiting resolution of the eye corresponds to about 475 TVL/PH on a 25" diagonal screen and about 760 TVL/PH on a 40" diagonal screen. Also, with larger and brighter pictures, and improved transmission by CATV giving higher signal-to-noise ratio and fewer ghosts, the artifacts in the present systems are more visible and more annoying.

Besides an increase in resolution and elimination of the artifacts resulting from interlaced scan and in-band transmission of the color information, there is another desirable improvement to present television systems—an increase in the aspect ratio from the current 1.33:1 to something on the order of 1.75:1. When television was first introduced in the 1930s, the standard aspect ratio for motion pictures was 1.33:1 and thus it was logical to adopt the same standard for TV. Subsequent

practice in motion pictures led to wider screens, partly in competition with TV, but also in recognition that a better match to the human visual system is achieved at the viewing distances of three to four times picture height that are typical in movie theaters.

Although many different aspect ratios have since been used for motion pictures, in the US today most movies

are projected with an aspect ratio of 1.85:1; in Europe with an aspect ratio of 1.67:1. An aspect ratio of about 1.75:1, therefore, would represent a good compromise with current motion picture practice.

HDTV systems

In its broadest sense, HDTV means higher resolution and wider aspect ratio

TV scan lines

Present NTSC systems employ 525 scan lines in two interlaced fields with a field rate of 59.94 fields per second and a luminance video bandwidth of 4.2 MHz. This results in a limiting resolution both horizontally and vertically of approximately 340 TV Lines/Picture Height (TVL/PH) for static images. The loss in vertical resolution results because the image is sampled in the vertical direction by scanning beams of specific size and shape. When there is motion in the scene, there is a further loss of vertical resolution due to interlace, since in each field there are only 242 active scan lines. The lag in present camera tubes also degrades the resolution both horizontally and vertically when there is motion in the scene.

The 625-line PAL and SECAM systems achieve a resolution of approximately 400 TVL/PH and use 5.0-5.5 MHz of luminance video bandwidth. In all of the present systems no additional bandwidth is required to transmit the color information. Although different encoding algorithms are used, NTSC, PAL, and SECAM

all transmit the color information on a subcarrier that is within the luminance band.

In addition to having limited resolution, pictures produced by present TV systems contain certain artifacts, which arise from two sources: interlaced scanning and in-band transmission of the color information. Interlace scanning produces two artifacts: Loss of vertical resolution with motion (already discussed) and interline flicker.

Whenever there is a horizontal edge in a picture that creates a large amplitude vertical luminance transition, information at the edge is being updated at 29.97 Hz (25 Hz for PAL and SECAM) and the flicker is visible. For this reason, interlaced scan is never used in computer terminal displays.

Artifacts due to in-band transmission of the color signal are crosstalk effects, which result from less than perfect separation of the luminance and chrominance signals. It produces false color in areas of high-frequency luminance (such as an umpire's shirt) and crawling dots on vertical edges that have a chrominance transition (such as titles).

by Bernard J. Lechner
Advanced Video Systems Research Lab
RCA Laboratories, Princeton, NJ

television pictures without artifacts. It is implicit that for HDTV the pictures be large, bright and free from noise and ghosts. Many proposals have been made over the past few years for improvements to our present television systems—variously labelled: improved NTSC, enhanced NTSC, enhanced definition TV, extended definition TV, and HDTV.

The following four examples compare the parameters of the two true HDTV systems proposals with NTSC and PAL.

- **Improved NTSC**—The key word in improved NTSC is compatibility, specifically backward compatibility—meaning either that no change is made in the transmitted signal, or that if any changes are made they will not affect the performance of the installed base of NTSC receivers. The majority of the effort on improved NTSC is based on no change to the transmitted signal, only improvements in the receiver.

These improvements can be considered part of the on-going evolution of TV receiver design and will occur in all parts of the TV receiver from the antenna terminals to the kinescope. A particularly important step in the process will be the introduction of digital baseband video processing to replace the analog

signal processing currently used. The simple replacement of analog processing with digital processing will, in a theoretical sense, accomplish no performance improvement; but practically, it will lead to significant improvements. With digital processing, performance will be determined solely by the design of the system, not by the specific implementation or precise factory setup.

The first truly significant improvement will come when field- and frame-store memories are introduced into TV receivers. There are three important uses for a frame store in a TV receiver: first, a frame comb filter can be used to separate the luminance and chrominance signals; second, a frame store can be used to convert the interlaced NTSC signal to progressive scan for display; and third, a frame store can be used as a recursive filter to improve the signal-to-noise ratio.

Improvements are dramatic in all three cases, but there is a problem when there is motion in the scene. Because the pixel values will differ from frame to frame when there is motion, the frame processing fails and artifacts, such as double images, are introduced. It is, therefore, necessary to make the processing adaptive to motion in the scene and revert to intra-frame processing where there is motion. This can be done

on a pixel-by-pixel basis. Future receivers will achieve perfect separation of luminance and chrominance and complete elimination of raster artifacts for static portions of images and performance at least as good as we have at present for the portions of the image that move.

Additional improvements to NTSC are possible if the signal is preprocessed before transmission. Currently, researchers are developing techniques for adding additional horizontal or vertical resolution, or both, to the transmitted signal without increasing the bandwidth required for transmission and without affecting compatibility with existing receivers.

- **Multiplexed Analog Components**—A non-compatible signal format, called Multiplexed Analog Components (MAC), has been proposed to eliminate the problem of separating luminance and chrominance. Instead of using a subcarrier to transmit the color information, the luminance signal is time-compressed on a line-by-line basis, making some time available on each line to transmit the chrominance signal, which is also compressed.

With this approach, the luminance signal is compressed to occupy $\frac{2}{3}$ of the active line time and the remaining $\frac{1}{3}$ is used for the chrominance signal. Each of the two color-difference signals is transmitted alternately line-by-line. The resulting chrominance bandwidth is one-half of the luminance bandwidth, both horizontally and vertically. Total signal bandwidth, however, has been increased by the factor $\frac{3}{2}$.

Thus, for NTSC luminance bandwidth of 4.2 MHz, the resulting MAC signal will have a baseband-width of 6.3 MHz; for 5-MHz PAL the resulting MAC bandwidth is 7.5 MHz. These bandwidths can be easily accommodated by DBS transponders—and it is primarily for this service that MAC has been proposed.

Although the MAC format eliminates the artifacts due to crosstalk between luminance and chrominance and only requires line stores—rather than frame stores—for receiver processing, it does not provide improved resolution or elimination of raster artifacts. It has been proposed that some additional horizontal resolution can be provided

PARAMETER	SYSTEM			
	NTSC	PAL	NHK	RCA/NBC
Aspect Ratio	4.3	4.3	5.33:3	5.33:3
Total Scan Lines	525	625	1125	750
Active Scan Lines	484	576	1035	726
Scanning Format	2:1	2:1	2:1	2:1
	Interlace	Interlace	Interlace	Progressive
Temporal Rate	59.94 Hz	50 Hz	60 Hz	60 Hz
Luminance Video Bandwidth	4.2 MHz	5.0 MHz	27 MHz	29 MHz
Luminance Horizontal Resolution	340 TVL/PH	400 TVL/PH	785 TVL/PH	580 TVL/PH
Luminance Vertical Resolution*	340 TVL/PH	400 TVL/PH	725 TVL/PH	508 TVL/PH
Color Difference Format	I and Q	U and V	C _R and C _B	C _R and C _B
Color Difference Bandwidth	Simultaneous 5 and 1.5 MHz	Simultaneous 1.5 MHz	Simultaneous 13.5 MHz	Line Sequential 14.5 MHz
Total Studio Bandwidth	6.2 MHz	8.0 MHz	54 MHz	43.5 MHz

*Kell factor of 0.7 is assumed.
For NTSC and PAL, it is assumed that the signals are not encoded.

Table compares parameters of the two true HDTV system proposals with NTSC and PAL.

by increasing the luminance bandwidth to 5.3 MHz resulting in a MAC bandwidth of 8 MHz that will fit in a DBS transponder.

Another proposal would use two DBS transponders to provide an HDTV service. The first transponder would provide a basic MAC signal (as previously described), while the second transponder would contain additional horizontal and vertical information as well as the side panels to provide a wide aspect ratio picture.

● **NHK system**—The Japanese Broadcasting Co. (NHK) has developed a system that essentially achieves all of the requirements for HDTV except the elimination of raster artifacts. The system is based on 1125 lines, 60 interlaced fields, an aspect ratio of 5:3 and 20-MHz luminance bandwidth. The resulting resolution is about 620 TVL/PH horizontally and 725 TVL/PH vertically. The NHK system proposes two-color

difference signals C_W and C_N having bandwidths of 7.5 MHz and 5 MHz respectively, resulting in a total bandwidth of 32.5 MHz. Substantial hardware for this system has been developed by a number of Japanese manufacturers and the system has been extensively demonstrated worldwide.

To fit the NHK signal into a transmission channel such as DBS requires bandwidth compression—and NHK has proposed a multiple sub-Nyquist encoding system called MUSE that achieves a 4:1 bandwidth reduction to 8 MHz. The encoding system requires multiple frame stores in the receiver and, although full resolution is achieved for static images, there is degradation with motion in the scene. A motion vector is computed before transmission and sent with the signal to help the receiver decoder adapt to unidirectional motion such as camera panning.


Recently, a modified version of the NHK system has been proposed for stu-

dio use. It has a slightly wider aspect ratio of 5.33:3 and increased luminance and chrominance bandwidths of 27 MHz and 13.5 MHz respectively, resulting in a total studio bandwidth of 54 MHz. The luminance horizontal resolution is increased to 785 TVL/PH.

● **Progressively-scanned system**—

Increased interest in using progressive scan in TV receivers has also increased interest in using progressive scan in the production process. This led RCA and NBC to propose a production system based on progressive scan.

The system uses 750 lines (726 active lines), 60 pictures/second, an aspect ratio of 5.33:3, and requires 29 MHz of luminance bandwidth. The resulting resolution is 580 TVL/PH horizontally and 508 TVL/PH vertically. Two color-difference signals of 14.5-MHz bandwidth are proposed with line-alternate color encoding, resulting in a total studio bandwidth of 43.5 MHz.

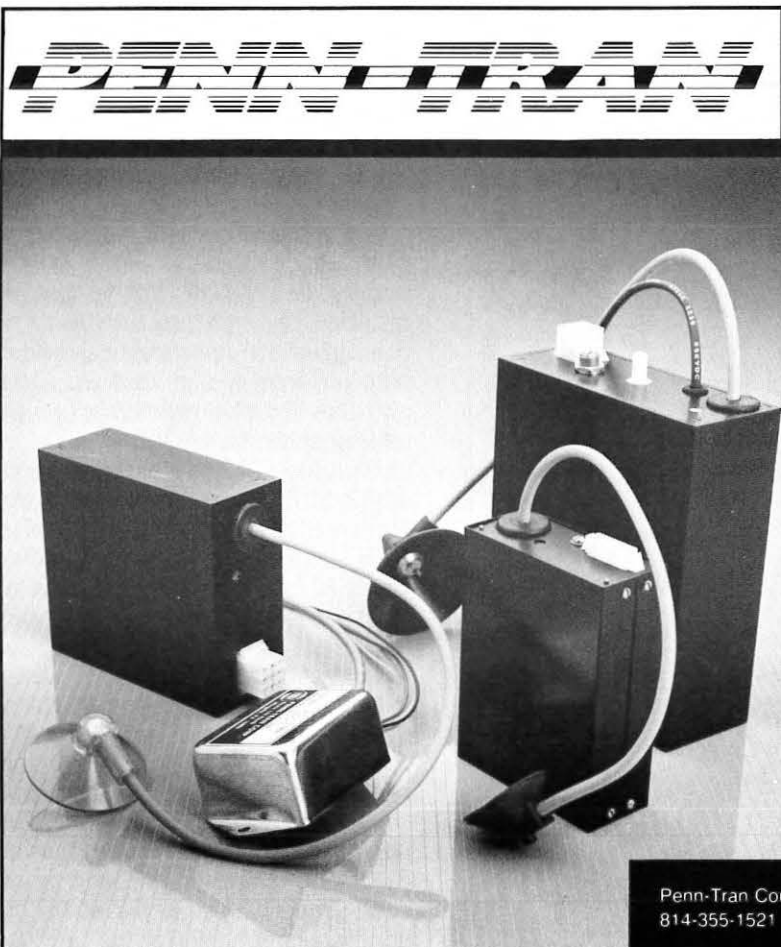

High Voltage Power Supplies to 30KV

Our engineering department designs supplies to full MIL SPECS, as well as high-reliability supplies to commercial standards.

These samples of power supplies are suitable for multiple customer-specified applications, or we will design a prototype to suit your application.

For prompt attention to your requirements, write or phone Bill Holt or Don Hill.

Penn-Tran Corporation, Route 144 North, P.O. Box 1321, Wingate, PA 16880
814-355-1521 Telex 706473

Although the system requires slightly more luminance bandwidth than the modified NHK system and has somewhat less resolution, it requires less total studio bandwidth and it has significantly improved temporal resolution that is believed to be important with future CCD cameras. Despite the static vertical resolution in such a system being about 30% less than that of the NHK system, the vertical resolution is not degraded with motion in the scene—and under these conditions is actually about 40% greater than that of the NHK system.

Another advantage of progressive scan in a production system is that pixels adjacent in space are also adjacent in time. This makes the image processing and manipulation required for special effects easier to accomplish without degradation. It also aids in frame-rate conversion as required for program exchange with 50-MHz coun-

tries and for producing 24-frame-per-second motion picture film.

Although HDTV in the near future will be used for production, delivering it to the home is another matter. Until fiber optic networks are in place, it is difficult to find enough spectrum space to accommodate the needs of HDTV. Thus, we are likely to see compromises including both bandwidth-reduced HDTV and extended-definition NTSC and PAL, possibly in MAC format, transmitted through channels of 8- to 10-MHz.

The one thing that can be said with certainty is that improved NTSC and PAL will occur. The large installed base of receivers provides an opportunity to introduce improvements to all parts of the system as advances in technology make such improvements technically and economically feasible.

(Developed from *High Definition TV*, by Bernard J. Lechner, Advanced Video Systems Research Laboratory, RCA Laboratories, Princeton, NJ—Keynote Address, SID '85, Orlando, FL.)

HDTV requirements

The key parameter of HDTV is bandwidth—every improvement made increases the required signal bandwidth. Doubling the resolution, for example, increases bandwidth by a factor of 4; increasing the aspect ratio to 1.75 increases bandwidth by a factor of $1.75/1.33 = 1.32$; eliminating the artifacts due to interlaced scan, by using progressive scan, leads to another factor of 2; and eliminating the crosstalk between luminance and chrominance, by keeping the signals separate spectrally, increases bandwidth by a factor of 1.5*. To achieve all of these improvements for NTSC would require a total bandwidth of $4.2 (4 \times 1.32 \times 2 \times 1.5) = 66.5$ MHz. The luminance bandwidth requirement is 44.4 MHz.

**(The ability of the eye to resolve detail in color is less than half of that in luminance. Hence, it is not necessary to reproduce chrominance with the same resolution as luminance. Present TV systems limit chrominance bandwidth to less than one-third that of luminance.)*

For information circle Reader Service #32

CALL MAGNAVOX/GENERAL ATRONICS CORPORATION

Manufacturers/
Designers
Of Standard &
Custom CRT's for
the Military and
OEM Market.



Please send
Requirements to
Magnavox/GAC
1200 E. Mermaid Lane
Philadelphia PA 19118
(215) 233-4100

IT'S LIKE MONEY IN THE BANK!

Drop tests show annealing restores "abused" mag shields

How much does dropping affect a Magnetic Shield: Its permeability? Its attenuation factor? Its workability? Its shielding effectiveness?

Estimated percentages, educated guesses, and theories abound. But there have been no conclusive answers available—based on statistics developed from results of an accurately controlled testing program, that is,—until now.

Engineers at Amuneal Mfg. Corp. (Philadelphia, PA) recently ran a series of "drop" tests on five magnetic shield cylinders—from a uniform height and under uniform conditions. Control parameters limited the sampling to one material thickness, one diameter, one length, and three drop heights. Cylinders were 2.4" ID, 10" long, 0.020" thick, and 80% nickel-iron alloy with the following chemical composition:

C	MN	SI	P	S	NI	MO
.018	.52	.32	.002	.001	80.1	4.33

Permeability potentials, resulting from ring test samples from induced current (ASTM Test #A-753), provided the following:

*by S.M. Kamens, President
Amuneal Mfg. Corp.
Philadelphia, PA*

B	PERMEABILITY
40	95,000

Attenuation tests performed immediately after fabrication (ASTM Test 698-74, the Helmholtz method) produced these results:

Shield	#1	#2	#3	#4	#5
	14	13	14	14	13
Attenuation	1	1	1	1	1

This was followed by a full hydrogen anneal in a furnace. Annealing consists of first soaking the cylinders in anhydrous ammonia (cracked at 1750F to make pure dry hydrogen at a dew point of minus 60F) for three hours at 2150F, then cooling them at an average rate of 370F per hour.

Test results (ASTM Test 698-74-2, Ostered field 60 Hertz) provided the following attenuation ratios:

Shield	#1	#2	#3	#4	#5
	526	500	500	487	500
Attenuation	1	1	1	1	1

To provide uniform height and drop conditions, a simple fixture was assembled that allowed controlled, repetitive horizontal drops—so cylinder sides would receive the impact of the drop.

During the test, each cylinder was

first dropped from a 1-ft height to a linoleum covered wooden floor, and the resultant attenuation was read and recorded. The procedure was repeated three times: dropping, then measuring (ASTM), and recording attenuation readings. Table #1 provides the results.

Shield	#1	#2	#3	#4	#5
After H₂ Anneal	526	500	500	487	500
	1	1	1	1	1
After 1st drop	400	393	400	444	476
	1	1	1	1	1
After 2nd drop	363	370	357	370	350
	1	1	1	1	1
After 3rd drop	357	303	333	303	338
	1	1	1	1	1

TABLE 1: 1-ft "Drop"

At this point in the test, a preliminary evaluation clearly shows an obvious reduction in shielding performance based on the continuous "misuse", or "abuse", created by dropping the cylinders.

Because shield #5 had the highest attenuation after the first drop, but subsequently the lowest after the second drop, it was assumed that possibly multiple bounces of this cylinder or maximum distortion of the material occurred.

Those results made it impossible to determine degradation of shield #5 after misuse.

Upon completion of the first set of tests, the cylinders were rerolled and sized, returning them to their original shapes. They were then annealed again in the same furnace, same heat, same H_2 flow, same cooling rate, and tested in the original manner.

Shield	#1	#2	#3	#4	#5
	625	625	714	625	625
Attenuation	1	1	1	1	1

Test results indicated higher attenuation was achieved on the second anneal. It was assumed that starting with an attenuation of 14/1 the initial H_2 anneal would increase permeability. But after three drops, with a resultant attenuation of 333/1, a second H_2 annealing not only increased permeability, but also provided a higher attenuation.


After the second anneal, cylinders were then subjected to three additional "drop" tests, at a new drop height of 2 ft—but in the same location as the first drop. Table #2 lists the results.

Shield	#1	#2	#3	#4	#5
After Re-Anneal	625	625	714	625	625
	1	1	1	1	1
After 1st drop	298	322	333	377	350
	1	1	1	1	1
After 2nd drop	250	265	285	277	277
	1	1	1	1	1
After 3rd drop	215	215	229	222	232
	1	1	1	1	1

TABLE 2: 2-ft "Drop"

Once again, upon completion of the tests the cylinders were rerolled and sized, returning them to their original shape, and again annealed for optimum shielding effectiveness. Testing (ASTM 698-74 Test) was again performed yielding the following results:

Shield	#1	#2	#3	#4	#5
	544	588	588	625	645
Attenuation	1	1	1	1	1

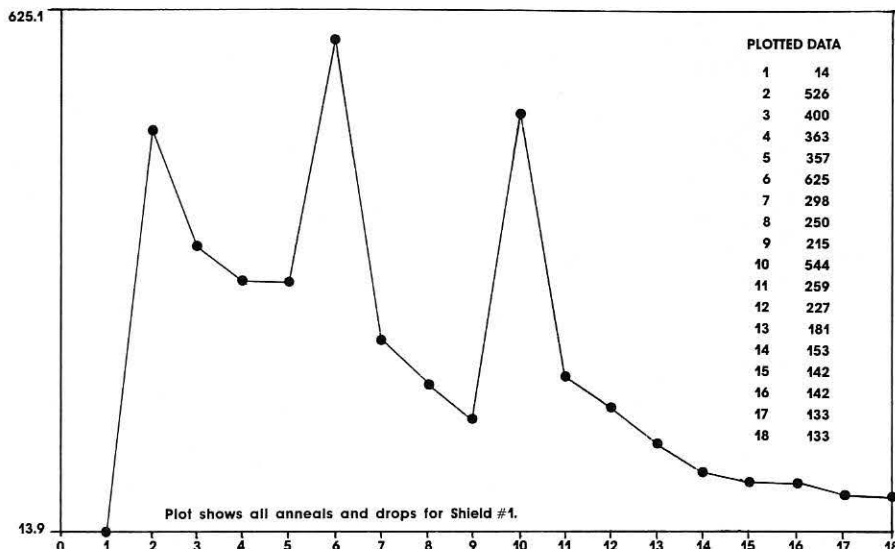

The results clearly indicate that after three 1-ft drops, rolling, sizing and annealing, followed by three additional 2-ft drops, attenuation is higher than provided by the first annealing. At this stage of the tests, it is evident that dropping and, naturally, continued dropping will reduce the permeability.

Continuing the drop test, this time from a 3-ft height provided the data in Table #3. At this point, it also becomes obvious that the greater the height of the drop, the greater will be the deterioration of permeability.

Shield	#1	#2	#3	#4	#5
After Re-Anneal	544	588	588	625	645
	1	1	1	1	1
After 1st drop	259	277	277	270	277
	1	1	1	1	1
After 2nd drop	227	212	215	202	238
	1	1	1	1	1
After 3rd drop	181	181	142	181	166
	1	1	1	1	1

TABLE 3: 3-ft "Drop"

If Shield #1 is examined, the 1-ft-drop reduced original attenuation of 526 to 400; the 2-ft-drop reduced it from 625 to 298; and the 3-ft-drop reduced a 544 initial attenuation to 259. From this, it can be concluded that the higher a magnetic shield is dropped, the more degradation that shield will show; and a reduction of approximately 50%

can be observed as the result of any significant drop.

Upon conclusion of the 3-ft drop test, cylinders were not annealed, but instead were dropped from a 3-ft height an additional five times. Attenuation was monitored after each drop as shown in Table #4.

Shield	#1	#2	#3	#4	#5
After 1st drop	153	153	133	142	166
	1	1	1	1	1
After 2nd drop	142	133	125	142	133
	1	1	1	1	1
After 3rd drop	142	133	117	133	133
	1	1	1	1	1
After 4th drop	133	133	117	133	117
	1	1	1	1	1
After 5th drop	133	133	111	125	117
	1	1	1	1	1

TABLE 4: Cumulative results

The results of these accurately controlled tests allows the following assumptions:

- Dropping a magnetic shield degrades the permeability and lowers the shielding effectiveness.
- Once a shield is degraded, it can be reannealed to achieve optimum magnetic shielding properties.
- Full hydrogen anneal is mandatory for maximum attenuation.
- Shields should always be handled with care.

Color display growth spurs development of thermal color copiers


Increased use of color information systems has created a demand for color hard-copy to supplement and implement color computer applications. To meet this growing demand, a number of color printing technologies have emerged within recent years—among them the thermal transfer*— process.

Unlike direct thermal printing methods (first introduced in the mid 1950s) that required specially coated thermal sensitive papers, today's thermal transfer systems use lower cost plain paper and produce hard copy images having longer shelf life. Additionally, thermal transfer processes permit half-tone and color printing, as well as the application of saturated colors in copies.

When configured with local intelligence, such printing systems can off-load CRT image information in fractions of a second—without need for special software to create the hard-copy. And, when a video frame store is added, the system can freeze an image during the copy cycle, thus allowing the operator to continue working with the display terminal without interruption to generate hard-copy. Without a frame store, the only requirement is that the display image remain static long enough to prevent blurring during copy time.

Video printers

Among a handful of such systems introduced within the past year or so is the Seiko D-Scan CH 5201B, which can generate prints having up to eight saturated colors at a resolution of 150 dots

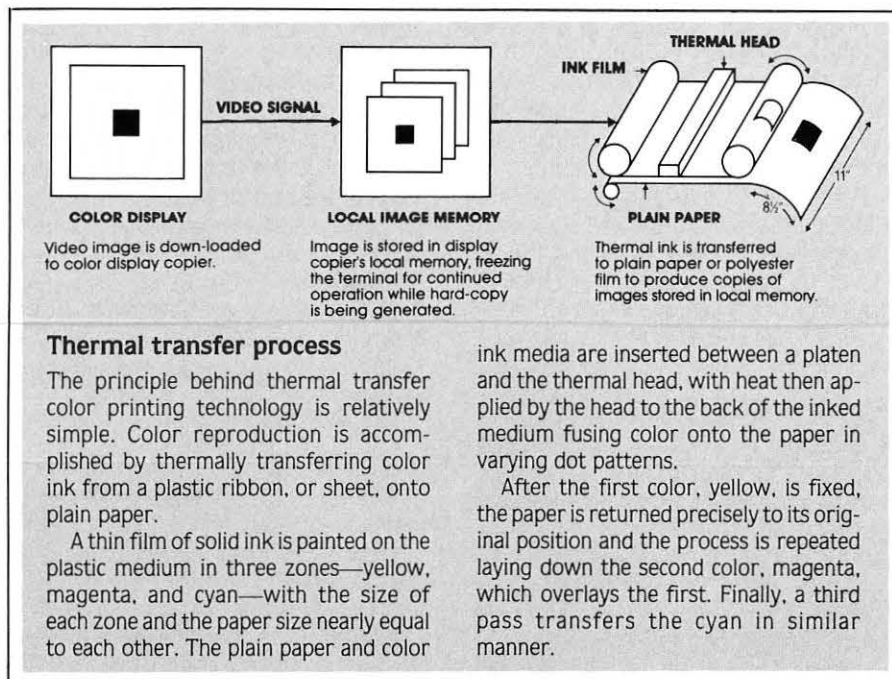

per inch. Once a file is captured by this system, repeat copies (up to 99) can be produced without further interaction with the terminal or the system.

Color for image transfer in the Seiko printer is contained on an ink sheet in three consecutive page-sized bands of yellow, magenta, or cyan. This color pigment can be transferred to plain paper or polyester film to produce color hard-copy.

Sensors built into the copier monitor critical copy parameters such as paper skew, thermal head temperature, and ink sheet conditions. The information derived is then used by a built-in microprocessor to dynamically adjust writing

parameters, thereby assuring optimum copy quality.

Structurally, the Seiko unit is divided into two command sections: one to control critical ink, sheet, and paper movements—using stepper motors; and the other to manage such electronic duties as control of input, formatting, storage, and output of graphic data to the thermal printing head. The system interfaces with either video or digital data, accepting most current RGB video signals.

(*Thermal Transfer Printing, Session IX, SID'85 International Symposium Digest of Technical Papers. For information circle Reader Service #35.)

Illuminance meter

Illuminance meter features a sensitive silicon photo cell, sophisticated microprocessor, and easy-to-read liquid crystal display. The hand-held meter calculates integrated illuminance over a period of time, measures illuminance deviation between sources, and checks the deviation of single source illumination at different meter positions. The LCD automatically signals when calibration is needed and when the operation is completed. The meter weighs 7¾ oz.; measures 1-5/16 x 13/16 x 6-11/16 in. Price: \$495. MINOLTA CORP., Ramsey, N.J. (201/825-4000)

For information circle Reader Service # 51

Copyboard

The Oki copyboard, consisting of a white writing surface connected electronically to a thermal printer, combines a blackboard with a photocopier. The copyboard is 58-in. wide, 75-in. high and weighs 172 pounds. The printer produces 8½x11-in. copies of whatever appears on the board. The board's writing surface scrolls to four separate 51x36-in. sections, all of which can be copied. While reproducing a section, the

copyboard can be erased. A memory unit enables additional copies to be made even if the original printing is interrupted. A smaller board 34-in. by 25-in. is also available.

OKIDATA, Mt. Laurel, N.J. (609/235-2600)

For information circle Reader Service # 53

High temperature elastomer

CONSIL-R (HT), a silicone based elastomer filled with pure-silver particles, is designed to meet high temperature requirements of military and aerospace applications. The conductive device is available in sheets, die-cut flat gaskets and cross-sectional strips.

TECKNIT, Cranford, NJ (201/272-5500)

For information circle Reader Service # 69

Channel intensifier tube

Proximity focused channel intensifier tube features a 75-mm diaphragm, provides a brightness intensification of low level input signals of 1.5×10^4 fL/fc, and utilizes a 25-m bore size microchannel plate for a limiting highlight resolution of 18 line pairs/mm, constant across the entire aperture. Model F4156 achieves less than 10% variation in output uniformity and equivalent back-

ground levels of less than 2×10^{-11} lm/cm². The device can be supplied with bi-alkali, tri-alkali or UV responsive photocathodes. The encapsulated tube has a 114 mm dia, is 25 mm long and can be customized for observation and amplification of fast events, in which case it would be gated on within 100 nanoseconds after application of the gate pulse.

ITT CORP., Fort Wayne, IN (219/423-4341)

For information circle Reader Service # 72

Arsenide emitters

Series of Gallium Aluminium Arsenide (GaAlAs) infrared-emitting diodes emit 880 nm peak emission, non-coherent infrared radiant energy when forward biased. Power output is three times greater than GaAs emitters at the same drive current. Models are OD-880W-Flat window, OD-880L-Lens Cap and OD-880F-Narrow Beam. Price: \$4.50 each (1-99).


OPTO DIODE CORP., Newbury Park, CA (805/499-0335)

For information circle Reader Service # 70

Pocket inspection microscope

Self-illuminated pocket microscope weighs

PENN-TRAN

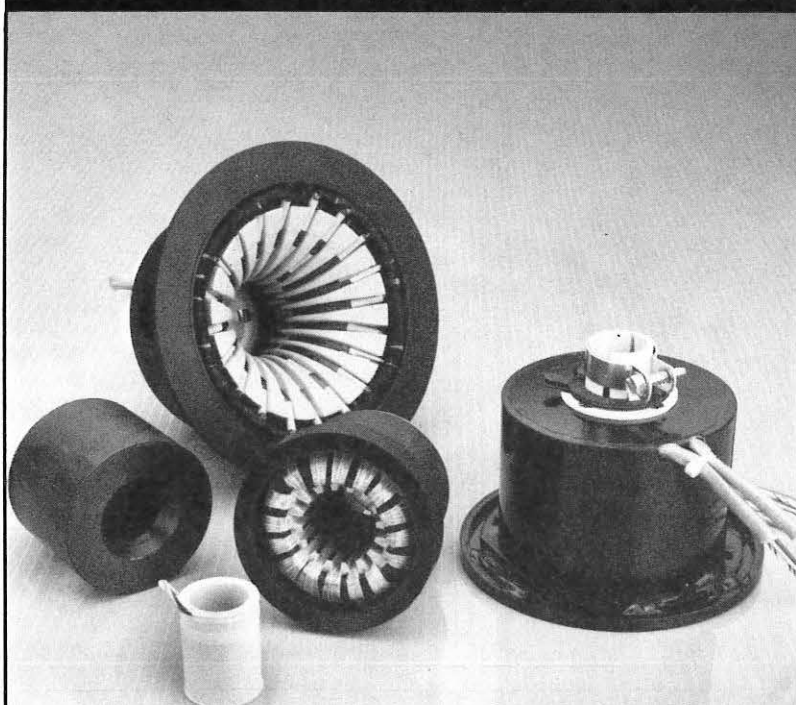

Stator Yokes

Penn-Tran yokes are custom-designed to either exact MIL requirements, or to high quality commercial standards. Our units are available for monochrome or color, and are used in military, avionics, projection television, medical and computer displays.

Write or phone Bill Holt or Don Alexander for prompt technical, price and delivery information.

Penn-Tran Corporation, Route 144 North, P.O. Box 1321, Wingate, PA 16880
814-355-1521 Telex 706473

Products

4-1/2 oz and provides 30-power magnification (Spirig-30); or 100-power magnification (Spirig-100). Price: \$19.50; \$34.50) SOLDER ABSORBING TECHNOLOGY INC., Springfield, MA (800/628-8862)

For information circle Reader Service # 71

Multi-user PC

PC/IT Personal Computer, utilizing the Intel 80286 processor and the IBM PC/AT 16-bit open architecture standard, operates as a stand-alone, supporting up to nine users, or links to Sperry or IBM mainframes. MS-DOS and XENIX-compatible software applications and hardware add-ons are available.

The system has a basic 512-kB memory that can be expanded to 1 MB without using expansion slots. Adding two boards increases memory to 5 MB. Additionally, the system can be configured with two 44.6-MB non-removable hard disk drives for a total mass storage capacity of 89.2 MB. A backup 60-MB tape storage device can be added.

The system's high-resolution monitor displays 16 different colors at one time from a total palette of 256 colors in either 640x200 or 640x400-dot resolution. Two built-in RS-232-C communications ports in-

tegrate into Sperry and IBM central processors. Price: \$4,340.

SPERRY CORP., Blue Bell, PA. (215/542-4213)

For information circle Reader Service # 50

Cartridge drive

HCD-134 data cartridge drive, a quarter-inch device in a 5 1/4-in. form factor, provides 134 MB data storage and has an average file access time of 14 sec. Random track access and bi-directional search is used with the drive providing data transfer at more than four megabytes per minute (70kB/sec). Streaming and random file/block access, operating modes and continuous or start/stop tape motion are featured. Price: Less than \$1,000 (OEM quantities).

3M, St. Paul, MN (612/736-2355)

For information circle Reader Service # 57

Laser printer

Facit's Opus 1 laser printer, for word processing and correspondence printing applications, prints up to 12 pages per minute. The laser combines the print quality of a typewriter with the high speed of a dot matrix printer. Other time-saving features in-

clude an ability to duplicate the text at copier speed, and a print resolution of 300x300 dots per in².

In the set-up mode, Opus 1 can create customized fonts by changing the height, width or slant on one of four basic fonts stored inside. In type mode, any one of four stored forms can be recalled. The draw mode offers graphics and line-drawing capability. Price: \$9,500.

FACIT INC., Merrimack, NH (617/894-3100)

For information circle Reader Service # 55

Xerox laser printer

A line of low-cost, desktop printers, 4045 Laser CP, can be shared by four personal computers and stores up to 128 different type fonts in various sizes and styles with text, graphics and data printed at 10 pages per minute. The printer can also be used as a copier. Standard interfaces available include Centronics, Dataproducts parallel ports or an RS232C serial port for asynchronous communications. The printer's memory capacity is 128 kB with optional memory expansion of 384 kB. Laser CP includes two resident standard fonts for horizontal and vertical character positioning. Also offered are four optional plug-in Read-Only-Memory cartridges that allow up to 36 different fonts to be loaded and accessed. Up to 90 fonts can be sent from the host computer and stored in the CP memory. Price: \$4,995. XEROX CORP., Stamford, CT (203/329-8711)

For information circle Reader Service # 56

AC coupler

IL250 is designed for applications that require AC or bi-directional optocouplers with very high current transfer ratios. The coupler has a minimum CTR rating of 50% at $I_F = 10$ mA and a typical CTR at 150%. IL250 consists of two inverse parallel GaAs infrared emitters coupled to an NPN phototransistor. Back-to-back input diodes detect signals of polarity and AC monitoring. Price: \$1.55 (Quantities of 1K).

SIEMENS, Iselin, NJ (201/321-4842)


For information circle Reader Service # 58

Test pattern generators


The 2500-Series, video test pattern generators designed for evaluation of all types of video displays is completely programmable and provides test capability at virtually any scan rate. Models 2501A, 2502A and 2503A, feature memory for 69 rasters, including different scan rates. Keypad code entries store, recall, edit or delete rates. A16 segment alpha-numeric display indicates timing and parameters. Software "lockout" prevents unauthorized editing without proper password. Model 2501A includes

SPECIAL OFFER LCD MATRIX

128 X 276 PIXEL 46 COLUMN X 16 LINES

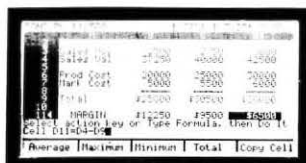

Item	Unit Price	Quantity	Total
128 X 276 PIXEL 46 COLUMN X 16 LINES	\$1.55	1000	\$1550.00
14-MSM5839GS	\$1.55	1000	\$1550.00
2-M5238GS	\$1.55	1000	\$1550.00
1-C324G	\$1.55	1000	\$1550.00
Total			\$6100.00



As low as \$30 per set in large quantity

- * Toshiba and Hitachi Alpha/Graphic display panels
- * 80.0 x 160.0 mm viewing area
- * High contrast reflective - variable viewing angles
- * OKidata Refresh Driver Board populated with:
 - 14-MSM5839GS
 - 2-M5238GS
 - 1-C324G

Computer Parts Mart

3200 Park Blvd. Palo Alto, CA 94306

415-493-5930


PHOTONICS TECHNOLOGY, INC.

PIONEERS AND LEADERS IN THE Design, Development, and Production of AC Gas Discharge Displays

**PHOTONICS
TECHNOLOGY
PRESENTS**

**THE WORLD'S FIRST
METER-SIZE,
HIGH RESOLUTION
FLAT DISPLAY TERMINAL**

**DEVELOPED FOR
MILITARY PROGRAMS
INCLUDING U.S. ARMY
AFATDS**

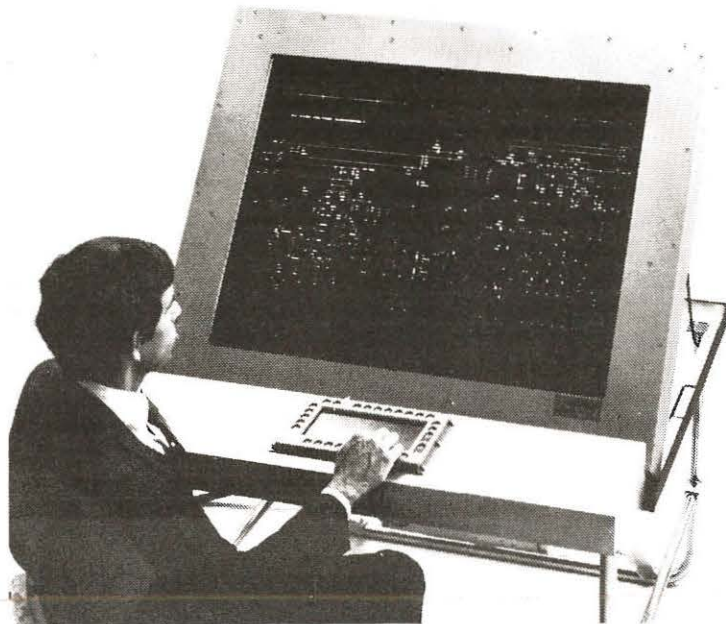

This is the world's first large area, high resolution, non-projected, flat display terminal. Utilizing AC gas discharge plasma display technology, the terminal has an active display matrix of 1600 by 1200 pixels measuring over 39 inches (one meter) diagonally with 5.3 square feet of viewing area and a resolution of 2500 pixels per square inch. All drive electronics are mounted in a 4 inch thick picture frame package around the perimeter of the transparent, thin (0.5 inch) display screen allowing for rear-projected and see-through applications.

Jointly developed by Photonics Technology, Inc., Luckey, Ohio and Magnavox Electronic Systems Co., Ft. Wayne, Indiana.

Photonics and Magnavox are presently completing the development of AC gas discharge flat panel displays ranging in size up to 3 meters with active display matrices up to 4096 by 4096 pixels. Multicolor displays are also being developed.

Photonics is the world's leading developer and manufacturer of sophisticated, high technology AC gas discharge displays. We are able to design and manufacture flat display panels, monitors, and/or terminals in a variety of sizes at relatively low costs. Our flat displays range in size from a few centimeters up to one meter. Some of our standard and custom displays include the following:

Panel Size, Pixels	Resolution, Pixels Per Linear Inch
128 x 256	40, 60
128 x 512	60
256 x 256	60
256 x 512	64
512 x 512	60, 64, 73, 83
512 x 1024	60
1024 x 1024	60, 73, 83
1200 x 1600	50.8, 101

Our standard display resolution ranges from 30 to 100 pixels per linear inch (900 to 10,000 pixels per square inch). Display resolutions up to 200 pixels per linear inch are available.

For Further Information, Contact:

Donald K. Wedding Sr., VP Marketing Photonics Technology, Inc., P.O. Box 432, Luckey, Ohio 43443, 419-666-0033.
Research, Development, and Manufacturing facilities located at 6967 Wales Road, Northwood, Ohio 43619.

Products

test pattern functions of bars, dots, flat field, window, V Stripe, color bars, resolution, character Cx, gray scale, video and combination. Model 2502A is virtually identical, and Model 2503A is configured for monochrome medical imaging systems. Its gray scale pattern includes 5% and 95% reference contrast flags. Price: \$4,950. VII, Xenia, Ohio (513/376-4361)

For information circle Reader Service # 75

Sealed bezels

Atlas 2, a line of pre-assembled sealed bezel/filter systems designed for most vacuum fluorescent displays, can be used for prototypes or full-scale production runs. Optionally correct color filter material is bonded to the bezel to improve the contrast ratio and reduce glare. Fourteen color filters are available. Price: \$12.15 to \$20.30 (100 piece quantities).

INDUSTRIAL ELECTRONIC ENGINEERS (IEE), Van Nuys, CA (818/787-0311)

For information circle Reader Service # 61

Design environment

Plessey MEGACELL design environment enables engineers with little or no semiconduc-

tor experience to create complete digital systems in silicon. Previously, system designers had to rely on a vendor's integrated circuit experts to interpret their ideas.

The original designer can create, lay out, test, and approve VLSI circuits from a video display terminal. The Plessey concept enables the user to tailor the size of such devices as RAM's and ROM's and create proprietary "standard" cells. The software, which can be applied to circuits of up to 100,000 transistors, constructs a model of the user-defined components for simulation and verification of design rules. It also creates test patterns and routing of the interconnects between cells. The software runs on Digital Equipment Corporation VAX systems.

PLESSEY, Irvine, CA (714/951-4212)

For information circle Reader Service # 54

Surge suppressor

SMOOTHLINE CP-220 AC surge suppressor protects peripheral equipment from power fluctuations. The four-outlet device includes an exterior, glowing switch to indicate operation. CP-220 features include a clamping time of less than one nanosecond after surge

detection of up to six kilovolts, a noise suppression filter network to protect against data corruption and equipment malfunction due to electromagnetic interference or radio frequency interference, and a 15-A circuit breaker. Price: \$69.95.

GTE, Teterboro, NJ (201/288-9487)

For information circle Reader Service # 62

Plasma display tube



Line of Bar Graph Plasma Display Tubes indicates the analog value of a measured parameter by the length of a bright orange neon-discharge column. The tubes are made of a flat glass panel construction, less than 0.250-in. thick and operate on DC voltage. A segmented cathode structure for high resolution is automatically scanned with a multi-phase driver. A 100-segment tube gives basically 1% resolution; 200- and 300-segment tubes are also available. MB-202-3P is a two-bar, 200-segments-per-bar display in a 4.75-x1.365-x0.210-in.-thick tube format.

MITSUBISHI INTERNATIONAL CORP., New York, NY (212/605-2607)

For information circle Reader Service # 73


LCD

CUSTOM/STANDARD BEST QUALITY/SERVICE U. S. MANUFACTURING

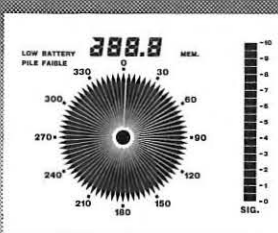- -40°C TO 95°C STORAGE/OPERATION TEMPERATURE
- LOW POWER/HIGH CONTRAST/WIDE VIEWING
- DICHROIC/PHASE CHANGE TYPES
- PLASTIC PROTOTYPE/GLASS PRODUCTION/DOT MATRIX
- COMMERCIAL/MILITARY STANDARDS
- CUSTOM MODULES
- 2 TO 4 WEEKS DELIVERY

POLYTRONIX, INC.
P. O. BOX 833024, RICHARDSON, TX 75083
(214) 238-7045





NEW

WORLD'S BRIGHTEST FLAT PANEL DISPLAY

1460FL.

VFD
Vacuum Fluorescent

- Absolutely Sunlight Readable
- Custom Design to your Spec.
- Dot Matrix or Segment displays.
- Panel Size: 0.5" x 1.0" to 20 ft x 40 ft.
- Pixel size: .005" to 1.0 inch.
- Color: Blue green to Full Color.
- Built-In Driver, Controller.
- Power: 5.0 Volt DC, (most models)

President's Message



SOCIETY OFFICERS

President: I.F. Chang
Vice President: J.A. van Raalte
Treasurer: L.E. Tannas, Jr.
Secretary: W.F. Goede

PRESIDENT'S ADVISORY COUNCIL

T.V. Curran, A. Kmetz, J. Simonds,
W. Good, B. Lechner, H.G. Slottow,
P. Pleshko

DIRECTORS

Minneapolis/St. Paul: R. Jamieson
Midwest: J. Markin
Delaware Valley: S. Filarsky
New England: T. Cheek
Mid-Atlantic: P. Pleshko
Bay Area: H. Sherman
Los Angeles: R.C. Knepper
San Diego: R.E. Thoman
Japan: M. Ashikawa
Past President: G.F. Carroll

COMMITTEE CHAIRMEN

Academic: L. Todd, L. Weber
Archives/Historian: R.C. Knepper
Bylaws: A. Silzars
Chapter Formation: A. Lakatos, C.J. Gerritsma
Definitions & Standards: Fred Oess
Group Formation: A. Penz, E. Lean
Honors & Awards: T.C. Maloney
Intersociety: H.L. Funk
Memberships: D. Baldauf
Nominations: G.F. Carroll
Proceedings: S. Sherr, C. Land, J.E. Bigelow
Publications: L. Maldoon, L. Gerding
Publicity: D. Pinsky
Symposium Advisory Committee:
J.A. van Raalte, T. Credelle, R. Durbeck

CHAPTER CHAIRMEN

Bay Area: G. Carroll
Delaware Valley: J. Parker
Japan: S. Kobayashi
Los Angeles: K. Kilcoyne
Mid-Atlantic: J. Stapleton
Midwest: J. Markin
Minneapolis/St. Paul: G. White
New England: M. Silverstein
San Diego: A. Dolle
UK & Ireland: M. Green

OFFICE ADMINISTRATION

National Office Mgr: Bettye Burdett

SOCIETY FOR INFORMATION DISPLAY

8055 West Manchester Avenue-Suite 615
Playa Del Rey, CA 90293 - 213/305-1502

This past year has proved to be one of the best for your Society—in terms of membership growth, conference attendance, and chapter participation.

More than 230 attendees at SID'85 last May signed up as new members. Another 150 have used the cards in ID to become members. At present, total SID membership stands at 2300 + —the highest enrollment in our Society's history.

But, the success of this recruitment effort can only be measured by the results of our current membership *RENEWAL* drive. You've already received a notice from our national office manager, Bettye Burdett, requesting prompt payment of dues. It's the best bargain you can get this year, or any year, for just \$25:

- Membership in *THE* professional society in your field of interest.
- *FREE* subscription to 12 issues of ID, the professional journal of the information display industry.
- Copies of the official Society Proceedings.
- Invitations to both annual Society conferences—SID'86 in San Diego, and IDRC'86 in Tokyo, Japan.
- Participation in local Chapter meetings.

... and, of course, exposure to new ideas, new contacts, new friends in the Information Display community.

* * *

There were more than 1000 attendees registered at SID'85, with over 60 vendors presenting demonstrations of their newest products ... in both cases, the largest number yet to participate in an SID conference. We anticipate 1200 next Spring at SID'86 in San Diego.

Likewise, the 505 participants in IDRC'85 this past Fall, in San Diego, also set an attendance record.

* * *

Some 80 + Chapter meetings throughout the US, Japan, and the UK drew an estimated 4000 members and guests during the year to hear specialists in display technologies discuss the newest developments and advances in the industry. The increasing number of meetings over previous years is also a welcome sign of a vigorous and healthy organization.

* * *

And finally, the growth of our Society's new Journal from a 9 times frequency to 12 times a year; from 141.25 pages of editorial material to 242 pages; from 44 advertisers to 72; from 2000 member-subscribers to more than 10,000 circulation at last count—further substantiates the preeminent position SID enjoys in the professional community.

Subscription cards in ID to date have added more than 1000 request subscribers to our circulation; while the combined distribution of ID at SID'85 and EI'85 (the Electronic Imaging Show in Boston) spread our word to some 3,000 new interested readers. Next year, we anticipate expanding this direct contact with potential new members through distribution at two additional national industry shows: NCC and Siggraph.

From my vantage point, 1985 was a good year for the Society. Let's maintain the momentum and make 1986 even more successful.

I.F. Chang

Chapter Notes

UK & Ireland: November 25, 1985

Program: General Meeting

Topic: Display Applications

Speakers: Charles Cooke, Plessey (Plasma Displays in Rugged Environments); Alan Knapp, Philips (Consumer Displays of the Future); Richard Davis, EFD (Getting the Most from Limited Display Capability); Ian Andrew, IBM (Don't Forget Human Factors).

Minneapolis-St. Paul: October 25, 1985

Program: Annual election of Chapter officers—

Vern Born, Pres.

Charles Ring, VP

Russ Inveldsen, Treas.

George Huard, Sec.

Richard Jamieson, Dir.

Topic: Leitzscope Precision X/Y Positioning

Speaker: Bill Dubbel

BMC

St. Paul, MN

Bay Area: October 22, 1985

Program: General Meeting

Topic: The Processes and Challenges of Manufacturing Cathode-Ray Tubes for a Growing Military Market

Speaker: Ron Johnson

Exec. VP and

Chief Operating Officer

Rank Electronic Tubes

Delaware Valley: October 17, 1985

Program: General meeting, followed by a guided tour of the Combat Information Center (CIC) of Ticonderoga-class cruisers, US Navy CSED Site, RCA, Moorestown, NJ

Topic: Aegis Display System—An overview of the US Navy AEGIS Combat Display System, the world's most advanced ship-board decision-making instrument.

Speaker: Reid R. Benton

AEGIS/CIC Design Mgr.

RCA Corp.

Design manager for both AEGIS cruisers and destroyers, Benton is also RCA Display Manager for designs including the new Navy Standard AN/UYO-21. Reid joined RCA in 1978, having previously served 18 years as a US Naval Aviator. During his Navy career, he worked in Command & Control for the Pacific Fleet and became Computer Program Project Manager of the Fleet Combat Systems Support Activity, San Diego, CA.

Los Angeles: October 2, 1985

Program: 85/86 kick-off meeting at which new chapter officers were introduced—

Pete Baron, Pres.

Don McMichael, Treas.

Ken Miller, Co-program Chair

Leon Steven, Co-program Chair

John Kossey, Sec.

Topic: Night Vision Helmet Visor Display

Speaker: Dick Winner

Hughes Radar Systems Group

El Segundo

Dick described an IR system for helicopters that allows a pilot to navigate the night-time terrain almost as though it were daylight. The system features a pod-mounted IR sensor served to the pilot's line-of-sight; a helmet incorporating mechanical (soon to be magnetic) sensors for detecting head position; a high resolution 1" CRT; a diffraction optics visor that allows the pilot to simultaneously watch the visual and IR scene; and a signal processor that converts the very wide dynamic range IR sensor signal into a nicely grey scale-rendered image. After his talk, Dick showed a short video tape recording of the image displayed to the pilot and demonstrated an operational binocular helmet.

UK & Ireland: September 17, 1985

Program: Annual general meeting at which Chapter officers were elected—

Prof. Mino Green, Chair

Neil Bartlett, Vice Chair

Derek Washington, Sec.

Dr. Barbara Needham, Treas.

Topic: Liquid Crystal Displays—a one-day conference held at Standard Telecommunication Laboratories (STL), Harlow, Essex.

Speakers: Mike Clark, RSRE (Overview of Liquid Crystal Materials, Multiplexing, In-cell Addressing, and Bistable Electro-Optic Effects); Bill Crossland, STL (Smectic-A Panel Intended for Use As a Datagraphic CRT Replacement); Matthew Bone, STL (Ferroelectric LC Materials and Devices); P. Migliarato, GEC (Review of Active Matrix Addressing, Including State-of-the-Art Examples from Japan and the US).

Mid-Atlantic: Schedule of Meetings

January 8, 1986: High Content Display (4 Mpels)

Nate Caswell, IBM

February 11, 1986: Meeting at Thompson-CFS/Dumont, Dover, NJ

Andre Martin


March 13, 1986: Image Processing

A.N. Netravalli, ATT-BTL

**QUALITY
GLASS PARTS**
**Laser scanning
computer peripherals**

- Average Modulus of Rupture 31000 PSI
- NO Loss In Dimensional Accuracy

ag
®

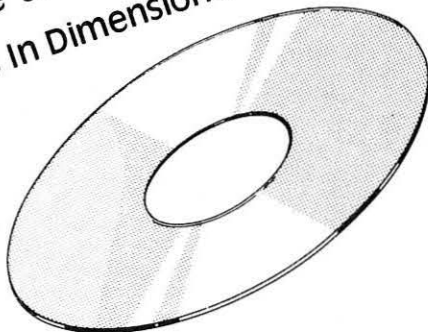

Artistic Glass Products Company
215-536-0333 • TELEX 211089 (AGP UR)

Trumbauersville, PA 18970-0051

Sustaining Members

Ad-Vance Magnetics Inc.
625 Monroe St.
Rochester, IN 46975
219/223-3158

AEG-Telefunken Corp.
Rt.22-Orr Dr.
Somerville, NJ 08876
201/722-9800

Amuneal Mfg. Corp.
4737 Darrah St.
Philadelphia, PA 19124
215/535-3000

Asea AB, Dept. YLKHM
S-72183
Vasteras, Sweden
021/10-0000

Audiotronics Corp.
7428 Bellaire Ave.
P.O. Box 3997
No.Hollywood, CA 91609
818/735-2645

Babcock Display Products
1051 S. East St.
Anaheim, CA 92805
714/491-5110

Ball Electronic Systems Div.
P.O. Box 589
Broomfield, CO 80020
303/469-5511

BDH Chemicals Ltd.
Broom Rd., Poole
Dorset BH12 4NN, UK
0202-745520

Bendix Corp.
Flight Systems Div.
Teterboro, NJ 07608
201/288-2000

Bidco Inc.
8 Commercial St.
Hicksville, NY 11801
516/433-0740

Canon, Inc.
7-1, Nishi-Shinjuku 2
Shinjuku-ku, Tokyo 160
Japan
714/556-1036 (California)

Cardion Electronics
Div. of General Signal Corp.
Long Island Expressway
Woodbury, NY 11797
516/921-7300

CESCA
Sistemas Electronics S.A.
APD036, 189
Madrid, Spain
91/675-4300

CELCO
(Constantine Engrg. Labs Co.)
70 Constantine Dr.
Mahwah, NJ 07430
201/327-1123

Cherry Electrical Prod. Corp.
3600 Sunset Ave.
Waukegan, IL 60085
312/662-9200

Chomerics Inc.
8 Commonwealth Ave.
Woburn, MA 01888
1-800/225-1936

**Clifton Precision/
Special Devices**
5100 State Rd.
Drexel Hill, PA 19026
215/622-1718

Clinton Electronics Corp.
6701 Clinton Rd.
Loves Park, IL 61111
815/633-1444

Conrac Corp.
3 Landmark Sq.
Stamford, CT 06901
203/348-2100

Control Interface Co. Ltd.
Optoelectronics Div.
21 Rt. 10
East Hanover, NJ 07936
201/887-3222

Corning Glass Works
Electronic Materials Dept.
MP21-3
Corning, NY 14830
607/974-7451

C.W. Cameron Ltd.
Burnfield Rd.
Giffnock
Glasgow, Scotland
UKG46-7TH

Dale Electronics
P.O. Box 609
Columbus, NE 68601
402/564-3131

Data Images
1283 Algoma Road
Ottawa, Ontario
Canada, K1B3W7

Display Components Inc.
334 Littleton Rd.
Westford, MA 01886
617/692-6000

Dontech Inc.
601 Airport Industrial Blvd.
P.O. Box 889
Doylestown, PA 18901
215/348-5010

Eagle Magnetic Co. Inc.
P.O. Box 24283
Indianapolis, IN 46224
317/297-1030

EG&G Gamma Scientific
3777 Ruffin Rd.
San Diego, CA 92123
619/279-8034

Electro-Plasma Inc.
4400 Martin-Moline Rd.
Millbury, OH 43447
419/255-5197

EM Industries
Advanced Chem. Div.
5 Skyline Dr.
Hawthorne, NY 10532
914/592-4660

Endicott Research Grp. Inc.
2601 Wayne St.
Endicott, NY 13760
607/754-9187

Futaba Corp.
629 Oshiba
Mobara, Chiba 297, Japan
0475-24-1111

Garrett Mfg. Ltd.
255 Attwell Dr.
Rexdale, Ontario
Canada M9W 5B8
416/675-1411

GEC Avionics
(Affil. General Electric Co.
p.l.c. of England)
4500 N. Shallowford Rd.
Atlanta, GA 30338
404/394-7800

General Atronics Corp.
Sub. of Magnavox Govt. & Ind.
Electronics Co.
1200 E. Mermaid Lane
Philadelphia, PA 19118
215/233-4100

General Electric Co.
Aircraft Instrument Dept.
50 Fordham Rd.
Wilmington, MA 01887

GML Information Services
594 Marrett Rd.
Lexington, MA 02173
617/861-0515

Grid Systems Corp.
2535 Garcia Ave.
Mt.View, CA 94043
415/961-4800

GTE
100 Endicott St.
Danvers, MA 01923
617/777-1900

Hartman Systems
A Figgie International Co.
360 Wolf Hill Rd.
Huntington Station, NY 11746
516/427-7500

Hazeltine Corp.
Cuba Hill Rd.
Greenlawn, NY 11740
516/261-7000

Hewlett-Packard Co.
Optoelectronics Div.
370 W Trimble Rd.
San Jose, CA 95131
408/263-7500 (x6450)

Hoya Optics Inc.
3400 Edison Way
Fremont, CA 94538-6138
415/490-1880

Hughes Aircraft Co.
P.O. Box 1042
El Segundo, CA 90245
818/391-0711

Hycom Inc.
16841 Armstrong Ave.
Irvine, CA 92714
714/261-6224

IBM Corp.
Armonk, NY 10504
914/765-1900

Imapro, Inc.
West Royalty Industrial Park
Charlottetown, Prince Edward Is.
Canada C1E 1B0
902/892-8594

**Industrial Electronic
Engineers Inc.**
7740 Lemona Ave.
Van Nuys, CA 91405
818/787-0311

Interstate Electronics Corp.
Display Product Operations
1001 E. Ball Rd.
Anaheim, CA 92803
714/635-7210

ISE Electronics Corp.
P.O. Box 46
Ise, Mie, Japan
0596/39-1111

K & R Engrg. Sales Corp.
354 Route 206
Flanders, N.J. 07836
201/584-5235

Litton Systems Canada Ltd.
25 Cityview Dr.
Rexdale, Ontario, Canada M9W 5A7

LXD Inc.
24500 Highpoint Rd.
Cleveland, OH 44122
216/292-3300

**Magnavox Govt. &
Ind. Elec. Co.**
1313 Production Rd.
Fort Wayne, IN 46808
219/429-5263

Magnetic Radiation Inc.
92 N. Lively Blvd.
Elk Grove Village, IL 60007
312/437-5200

**Micro-Curl
Display Technology Inc.**
61 Wilton Rd.
Westport, CT 06880
203/226-0222

**Mitsubishi Electronics
America, Inc.**
991 Knox St.
Torrance, CA 90502
213/515-3993

NEC Electronics Inc.
401 Ellis St., PO BOX 7241
Mountain View, CA 94039
415/960-6041

**Nederlandse
Philips Bedrijven B.V.**
PO Box 218
5600MD Eindhoven
The Netherlands
31-40-791111

**Norden Division
United Technologies Corp.**
100 Helen St.
Norwalk, CT 06856
203/852-4905

OKI Electric Industry Co., Ltd.
550-5 Higashiasakawa-cho
Hachioji-shi
Toyko, 193, Japan
0426/63-1111

Optical Coating Lab. Inc.
2789 North Point Pkwy.
Santa Rosa, CA 95407-7397
707/545-6440

Optical Radiation Corp.
1300 Optical Dr.
Azusa, CA 91702
818/969-3344

Orwin Associates Inc.
88 Seabro Ave.
Amityville, NY 11701
516/842-7177

Ovonic Display System Inc.
1896 Barrett St.
Troy, MI 48084
313/28C-1900

Panelvision Corp.
265 Kappa Dr.
Pittsburgh, PA 15238
412/963-9635

Philips Electronics Ltd.
601 Milner Ave.
Scarborough, Ontario,
Canada M1B 1M8
416/292-5161 Ext.2567

Phosphor Products Co. Ltd.
27 Dawkins Rd., Hamworthy
Poole, Dorset BH154JB, UK
0202-677220

**Photo Research Div.
Kollmorgen Corp.**
3000 N. Hollywood Way
Burbank, CA 91505
818/843-6100

Photonics Technology
6967 Wales Rd.
Northwood, OH 43619
419/666-0033

Planar Systems Inc.
1400 NW Compton Drive
Beaverton, OR 97006
503/625-2006

Plessey Displays
Station Rd.
Addlestone, Weybridge
Surrey KT15 2PW, UK
0932-47282

**Plessey Optoelectronics
and Microwave Ltd.**
Wood Burcote Way
Towcester, Northants,
England NN127JN
0327-51871

**PTK
Div. Emerson Electric Co.**
1173 Los Olivos Ave.
P.O. Box 6128
Los Osos, CA 93402
805/528-5858

Quantum Data Inc.
455 E. Kehoe, Suite 104
Carol Stream, IL 60188
312/668-3301

**Racal Microelectronic
Systems**
Worton Grange Ind. Estate
Reading RG2 0SB, UK
0734-864611

Rank Electronic Tubes Ltd.
Sidcup-By-Pass
Sidcup Kent DA14 6LZ, UK
01/302-0271

Raytheon Co.
Ind. Components Operation
465 Center St.
Quincy, MA 02169
617/899-8400

RCA Laboratories
David Sarnoff Research Center
Princeton, NJ 08540
609/734-2000

SAI Technology Co.
4060 Sorrento Valley Blvd.
San Diego, CA 92121
619/452-9150

Sanders Associates Inc.
MER15-1222
C.S. 2035
Nashua, NH 03061
603/885-3522

Sigmatron Nova Inc.
1901 Oak Terrace Lane
Thousand Oaks, CA 91320
805/498-4504

Singer-Librascope
Aerospace & Marine Systems Grp.
833 Sonora Ave.
Glendale, CA 91201
818/245-8711

Sony Corp.
7-35 Kitashinagawa 6-chome
Shinagawa-ku Tokyo, 141 Japan
03/493-3406

Stanford Resources Inc.
P.O. Box 20324
San Jose, CA 95160
408/448-4440

Syntonic Instruments Inc.
100 Industrial Rd.
Addison, IL 60101
312/543-6444

Tecknit
129 Dermody St.
Cranford, NJ 07016
201/272-5500

Tektronix Inc.
Information Display Products
P.O. Box 500
Beaverton, OR 97007
503/644-0161

Telmos Inc.
740 Kifer Rd.
Sunnyvale, CA 94086
408/732-4882

Texas Instruments Inc.
P.O. Box 225936, MS105
Dallas, TX 75265
214/238-4533

Thomas Electronics Inc.
100 Riverview Dr.
Wayne, NJ 07470
201/696-5200

Thomson-CSF Components
Dumont Div.
550 Mount Pleasant Ave.
Dover, NJ 07801
201/328-1400

Thorn-Emi Brimar Ltd.
Greenside Way Middleton,
Manchester M24 1SN UK
061/681-7072

Triumph-Adler AG
Further Str. 212
8500 Nurnberg, W. Germany
0911/322-0

UCE Liquid Crystal Displays
24 Fitch St.
Norwalk, CT 06855
203/838-7509

Venus Scientific Inc.
399 Smith St.
Farmingdale, NY 11735
516/293-4100

Visual Information Institute Inc.
P.O. Box 33
719 Lower Bellbrook Rd.
Xenia, OH 45385
513/376-4361

Westinghouse Electric Corp.
Industrial & Government Tube Div.
Westinghouse Circle,
Horseheads, NY 14845
607/796-3350

Zenith Electronics Corp.
1000 Milwaukee Ave.
Glenview, IL 60025
312/391-7657

Advertisers Index

RS #		
16	Artistic Glass Products Co	26
18	CELCO (Constantine Engineering Labs, Co.)	Cover IV
	Stano Advertising	
14	Computer Parts Mart	22
2	Eagle Magnetic Co. Inc.	1
	Owen & Owen Inc.	
11	IEC Company	24
12	Magnavox/General Atronics Corp.....	15
4	Magnetic Radiation Laboratories, Inc.....	4
	Harrison Advertising Inc.	
5	Microvision.....	4
6	Panasonic Industrial Co.....	5
	Sommer Inc.	
9,13	Penn-Tran Corp.....	14,21
	Snaveley Vidmar and Associates	
15	Photonics Technology Inc.....	23
10	Polytronix, Inc.	24
1	Quantum Data	Cover II
3	Southwest Vacuum Devices Inc.....	2
	Owens & Associates	
8	Special Purpose Technology Corp.	8
17	Tecknit	Cover III
7	Westinghouse Electric Corp.....	6
	Ketchum Advertising	

Editorial Calendar

Issue	Application Article	Product Feature
JANUARY	Business & Scientific Displays	LCDs
FEBRUARY	Commercial Signage/Displays	CRTs
MARCH	Information Storage Technology	VFDs
APRIL	Automotive Electronic Displays and Information Systems	Graphics
MAY	SID '86 Annual Symposium-Exhibition	
JUNE	Medical Imaging/Instrumentation and Documentation	Machine Vision
JULY	Printing Technologies	ELDs
AUGUST	Communication Systems	Electronic Imaging
SEPTEMBER	Avionics Display Systems	Gas-Plasma Displays
OCTOBER	Electronic Imaging	Storage Devices
NOVEMBER	Human-Machine Interface	Input Devices
DECEMBER	Today's Technology—Tomorrow's Systems (Annual Review & Forecast)	

BUSINESS STAFF

Eugenie L. Gray
Publishing Director

Leslie A. Saunders
Marketing Manager

Harriet Sherman
Art Consultant

Business Office: 212/687-3836

REGIONAL SALES OFFICES

New England

The Boston Man
PO Box 207
Hingham, MA 02043
617/848-9306
N. Wood

New York, New Jersey

C. Lynn Coy & Associates
55 Forest Street
Stamford, CT 06902
203/327-4626
Ted Taylor

Mid Atlantic

C. Lynn Coy & Associates
336 King of Prussia Road
Radnor, PA 19087
215/687-9811
Nancy Hunter

Southeast

C. Lynn Coy & Associates
55 Forest Street
Stamford, CT 06902
203/327-4626
Al Junge

Midwest

C. Lynn Coy & Associates
3412 Main Street
Skokie, IL 60076
312/673-8899
Al Riefenberg

West Coast

Ted Lucas
P.O. Box 852
Cedar Glen, CA 92321
714/337-8889

RECRUITMENT ADVERTISING

MetaData Inc.
310 East 44th Street
New York, NY 10017
212/687-3836
Leslie A. Saunders

EDITORIAL

Joseph A. MacDonald
Editorial Director

WHEN THERE CAN'T BE A MARGIN FOR ERROR

...rely on the EMI experts you always wanted on your staff.

Where performance must meet design, results can't be "almost as good." With over 25 years experience in the development and manufacture of EMI Shielding products, TECKNIT engineering understands your requirements and provides "center line" quality.

TECKNIT patented TECKSHIELD-F[®] high performance EMI shielding flat glass or acrylic windows were developed for TEMPEST Visual Display Unit (VDU) applications. Ruggedly constructed, TECKSHIELD-F[®] Windows provide protection against moisture intrusion or entrapment with its fully laminated design feature.

Various design options

for contrast enhancement including anti-reflection coatings permit flexibility in matching optical and shielding requirements to specific designs.

Write for your copy of the new TECKNIT Design Guidelines for EMI Shielding Windows.



TECKNIT[®] a TWP company

129 Dermody St., Cranford, NJ, 07016

320 N. Nopal St., Santa Barbara, CA, 93103

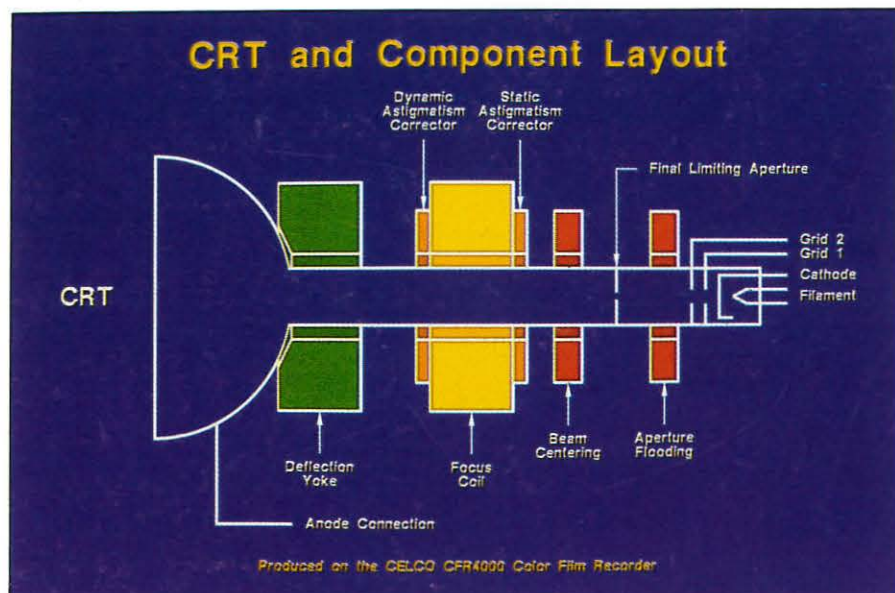


Figure 1 All graphics shown here are produced on The CELCO Machine (CFR4000 CRT Color Film Recording System) at CELCO in Mahwah, NJ.

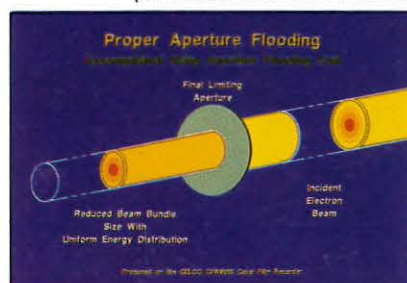


Figure 2



Figure 3

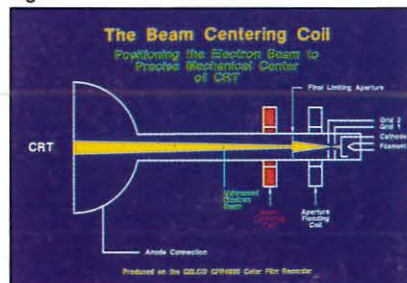


Figure 4

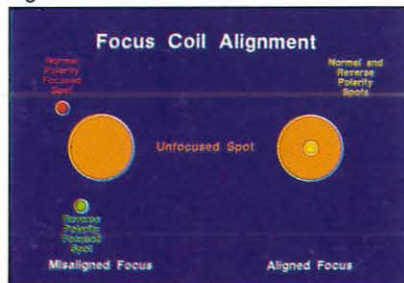


Figure 5

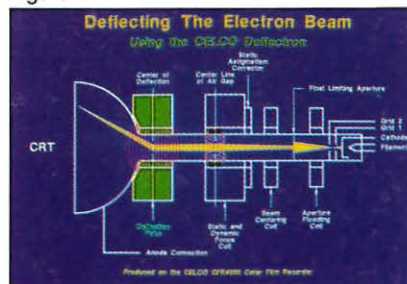


Figure 6

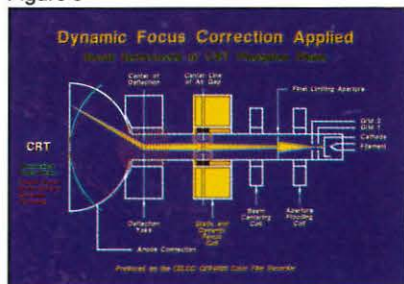


Figure 7

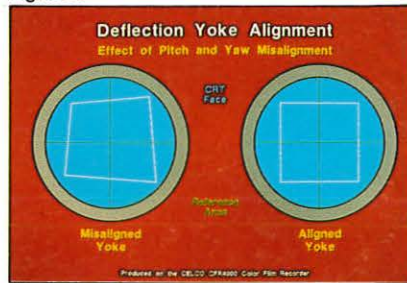


Figure 8

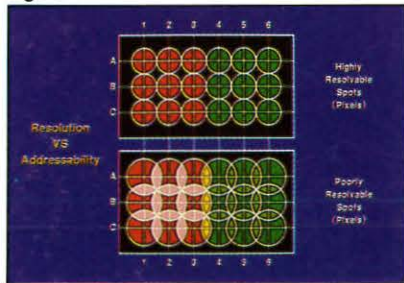


Figure 9

CELCO's Electron-optical techniques produce ultra- high-resolution CRT displays.

Absolute control over the size, shape and position of the scanning electron beam spot is necessary to produce an ultra-high-resolution CRT display. For example, the CELCO CFR4000 CRT Color Film Recording System yields over 7500 resolvable points across the CRT face with resulting image content in excess of 31 million picture elements per field. This system is presently providing theatre-quality imagery to the rapidly growing computer graphics industry for computer animation and other computer image generation techniques of recent development. Other applications include imagery for oil exploration and analysis and other geological interpretations and LANDSAT.

Proper selection and use of cathode-ray tube, deflection yoke, magnetic focus lens, astigmatism correction, centering and aperture flooding coils is the foundation of your high resolution CRT display. Figure 1 indicates the proper position of the magnetic components on the CRT neck.

Figures 2-8 depict uniform aperture flooding, focusing of the divergent beam, astigmatism correction and deflection from center to the 63 million other positions of addressability (on the CELCO Machine) without distorting spot shape or size. Figure 9 illustrates the difference between resolution and addressability.

For a more detailed discussion, please circle reader service number below to reserve your free copy of "Electron-optical techniques for an ultra-high resolution color film recorder", (delivered before SPIE, January 1984) by John Constantine, Jr., CELCO Vice-President and Yoke Designer. Or call CELCO today with your display requirements: 201-327-1123. Ask for Doc Christaldi, Engineering Sales Manager.

