


Official Monthly Publication of the Society for Information Display

INFORMATION DISPLAY

June 1988
Vol. 4, No. 6

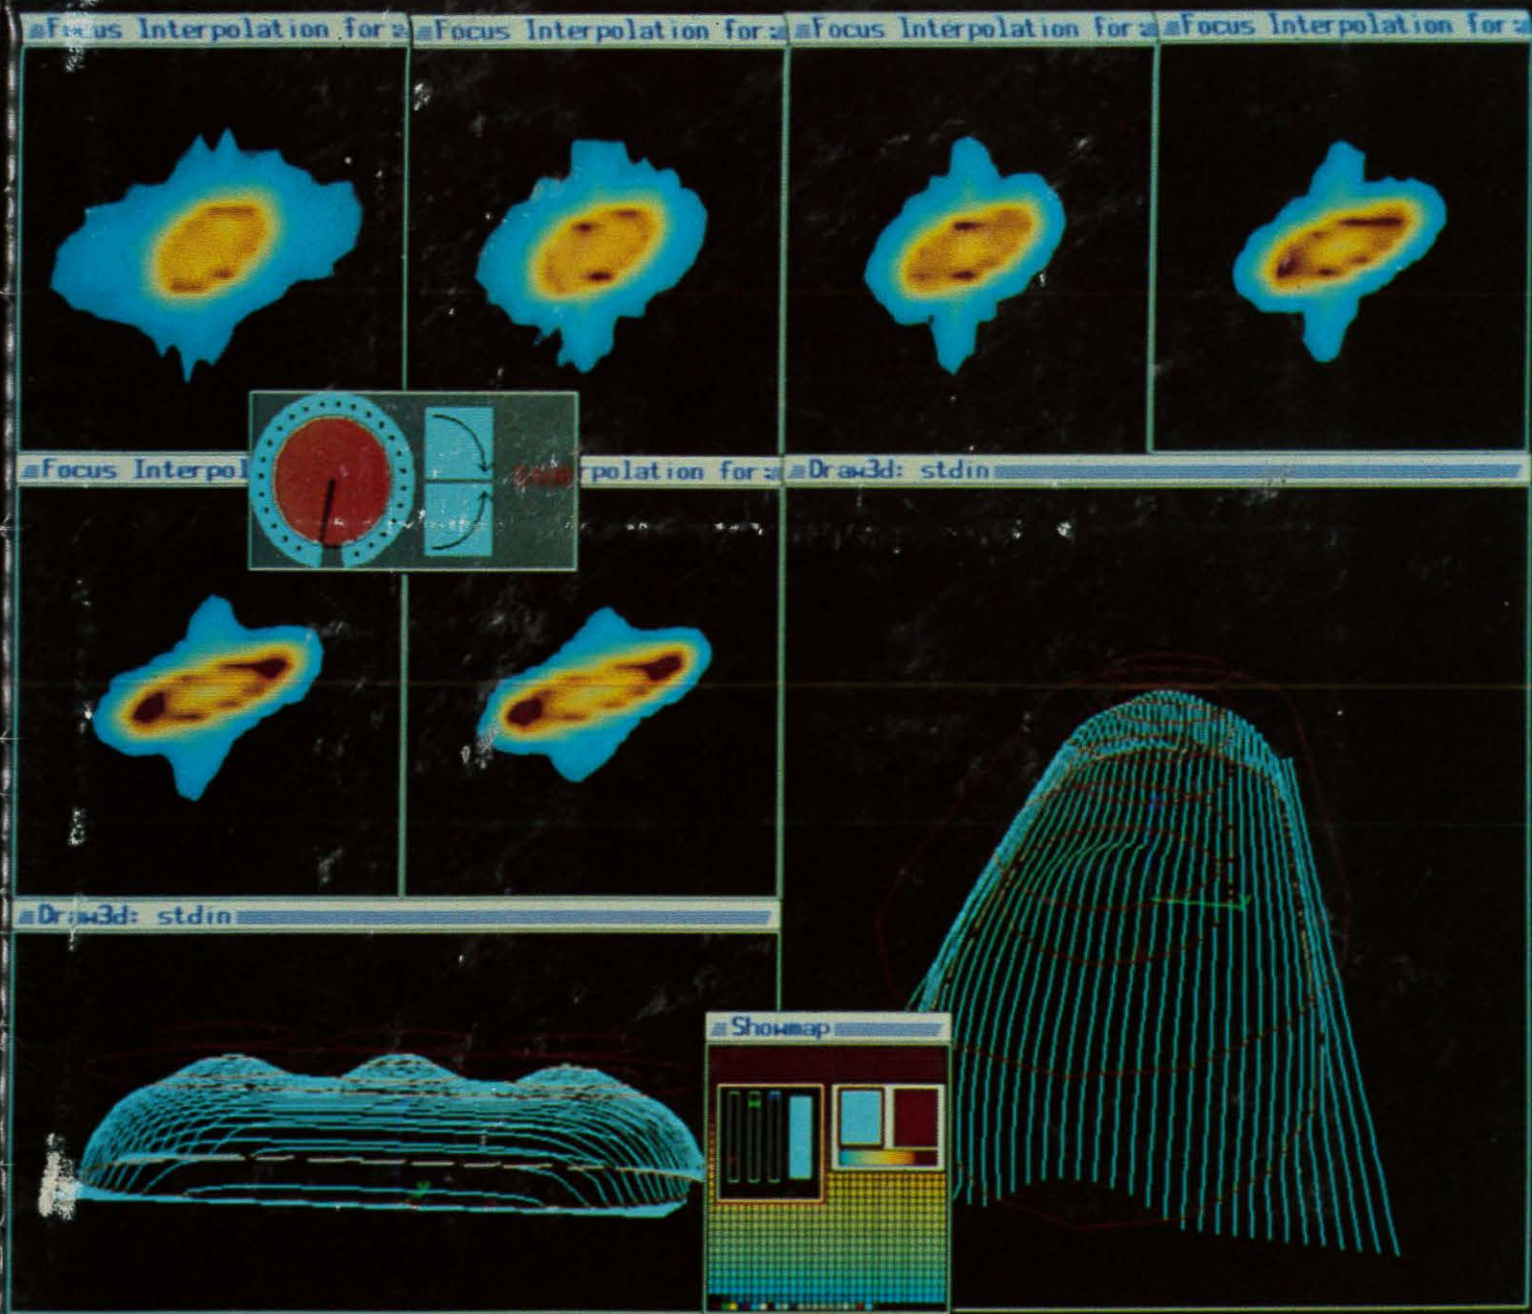

CRT technology issue
Guns and yokes
Bulb design
Automated CRT testing

Non-Profit Organization
U. S. Postage
PAID
Phillipsburg, N. J.
Permit No. 187



**High
resolution,
rugged CRT's
for avionics
... a brighter
idea from
AEG!**

The new color display tube from AEG, the M18-E851, is specifically designed to meet the needs found in avionics applications.

This new rugged assembly is quite at home in the relatively harsh environmental confines of a high performance aircraft cockpit.

The CRT achieves its high resolution via the use of a fine 0.2mm pitch shadow mask and a very rugged in-line electron gun.

Assembly technology for the very bright 5" x 5" display includes a self-converging deflection system, static color purity with convergence correction and an effective contrast enhancement filter. All of these innovations result from the many years of AEG leadership and experience in tube technology for avionics.



AEG is a world wide source for technological innovation in areas which include not only technical tubes for avionics but information systems, electronic packaging, power semiconductors, robotics and office systems, to name a few.

For more information on our high resolution color CRT's or on any of our other high technology products, contact:


AEG Corporation
Route 22-Orr Drive
PO Box 3800
Somerville, NJ 08876-1269
or call (201) 231-8300.

AEG


13 REASONS WHY THIS OPIX™ VIDEO SIGNAL GENERATOR BELONGS ON YOUR BENCH

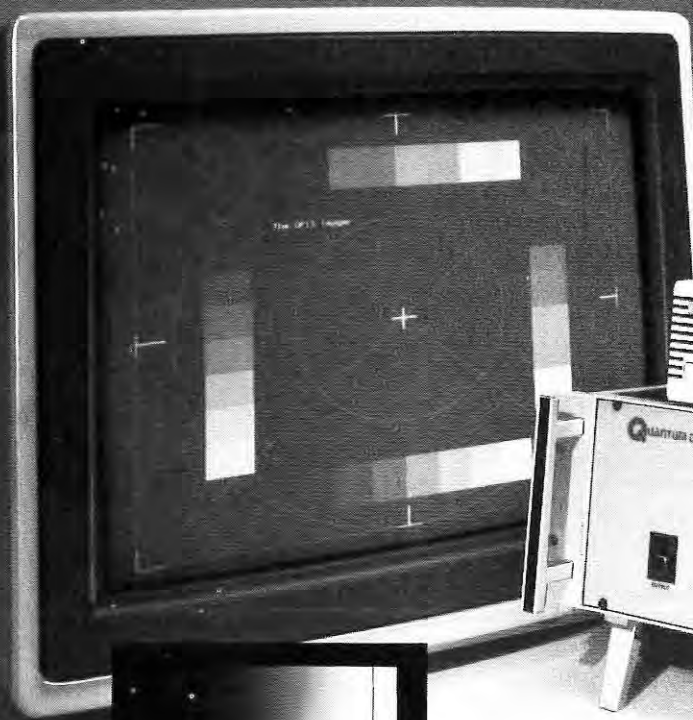


256 Level Gamma Pattern



SMPTE RP-133



Cross Talk



RGB Delay

- ① Full color graphics with programmable frequencies.
- ② A disk full of "Instant Expert™" test patterns that put the power of OPIX in your hands "right now" and cut hours off the learning curve.
- ③ A user interface designed for monitor testing.
- ④ Full text capability with fixed and proportional spacing.
- ⑤ 1.56–200 MHz pixel rate in monochrome and color.
- ⑥ Ultra fast precision analog outputs—256 levels.
- ⑦ Multiple outputs—differential TTL, ECL & analog.
- ⑧ An palette of 16 million colors to choose from.
- ⑨ Custom images you can design, use and store.
- ⑩ Terminal and system interfaces—RS232 & IEEE488.
- ⑪ Mass storage on floppy disks.
- ⑫ Four sync channels with programmable pixel time.
- ⑬ Flexible units—pixels, frequency and time.

CALL US FOR A FREE VIDEO TAPE ON OPIX.

We have an exciting video tape that demonstrates OPIX capabilities. Call for your copy and see how user-friendly a signal generator can be. You won't find a better signal generator anywhere! QUANTUM DATA, 2111 Big Timber Road, Elgin, IL 60123. Phone: (312) 888-0450 FAX: 888-2802 Telex 206725

QUANTUM DATA®

**MAKE FAST, COMPREHENSIVE, AUTOMATIC CRT MEASUREMENTS
WITH THE SUPERSPOT 100 FROM MICROVISION**

CRT MEASUREMENT SYSTEM FROM MICROVISION

The **SUPERSPOT 100** System coupled with the **SPOTSEEKER II** Positioning System (with Automatic Focus) allows fully automatic characterization of Color and Monochrome CRT Displays without operator intervention.



Measures:

- Luminance (Footlamberts & Nits) • Line Width, Including Color Line Width (Gaussian Fit) (1 Second)
- Color Misconvergence (2 Seconds) • Linearity, Pincushion and Focus • Line Jitter, Swim and Drift
- Contour Maps of Spots, Lines or Characters (10 Seconds) • Beam Landing & Crowding
- FFT for Discrete Frequency Spectra (1024 points in one second) • High Voltage Regulation Tests
- Real Time Display of Beam Intensity Profile (20 Frames/Second Display) • Disk Data Logging • MTF

Provides:

- Pattern Generation for Tests • Adjustable Cursors for Feature Analysis

MICROVISION • 591 West Hamilton Avenue, Suite 250, Campbell, CA 95008 • Tel: 408/374-3158 • FAX: 408/374-9394

Circle no. 3

UPDATE YOUR IMAGE

**... with the uncompromising quality of products manufactured
by CRT Displays—A Division of Teltron, Inc.**

**At CRT Displays, we stand by the quality of our products,
and just as important, we stand ready to serve all our
customers' CRT needs.**

Make CRT Displays your supplier for super reliable monochrome tubes.

**For more information and competitive prices, call our
technical representative today at 1-800-TELTRON.**



**2 Riga Lane, Baltic Mews Corporate Center
Birdsboro, PA 19508 1-800-TELTRON • 215-582-2711
TELEX: 4990805 • FAX: 215-582-0851**

Circle no. 4

Official Monthly Publication of the Society for Information Display

INFORMATION DISPLAY

JUNE 1988
VOL. 4, NO. 6

*Cover: A multiwindow graphics workstation shows corner spots at different settings of the focus voltage and two views of an equipotential surface in the XL lens. Data was generated by David Sarnoff Research Center's BEAM3D software program for CRT design.
(page 10)*

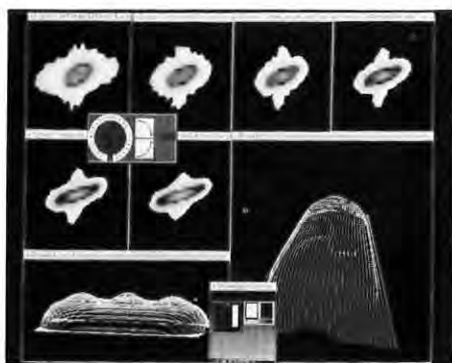


Photo: David Sarnoff Research Center

Next Month in Information Display

Emissive Flat Panels

- Plasma displays
- Electroluminescent displays
- Large masks for flat panels

- 5 Editorial
- 9 President's Message
- 10 Guns and yokes—computer aid for modern designs
Computer modeling keeps the color CRT young and dynamic, even at the age of 40.
Dennis J. Bechis
- 16 Automated CRT inspection and alignment
Machine vision and interactive graphics speed CRT testing and calibration.
Robert Lin, Jr.
- 18 Without glass, it's not a tube
New CRT designs challenge the glassmaker's art.
R. L. Mathew
- 24 Call for Awards Nominations: 1989
- 27 ID Classified
- 28 Sustaining Members
- 28 Index to Advertisers


The Convergence Factor.

Convergence: the single most critical factor in color CRT performance.

Until now, Delta-gun tubes were the best way to achieve near perfect convergence, but only with costly adjustment electronics. Meanwhile, many in-line tubes are plagued by perceptible misconvergence. Which can lead to poor picture quality. A poor quality image for your product. And poor, bleary-eyed operators.

The Panasonic achievement: low cost in-line color CRTs with better-than-Delta convergence performance.

Without complex adjustment electronics . . . and none of the convergence drift inherent in active correction systems. At last, high resolution in-line tubes with stable performance that stands up to the ravages of time and tough office/industrial environments.

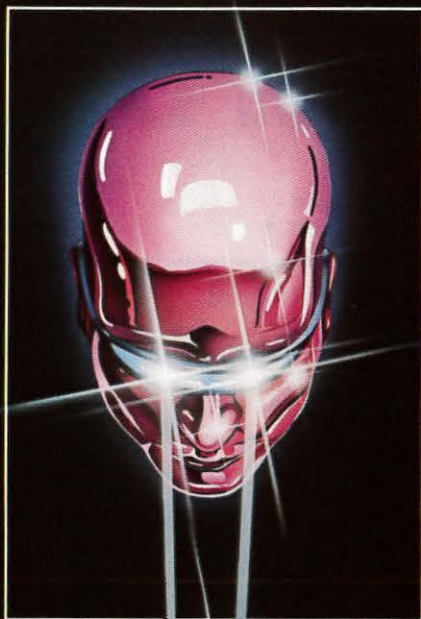

**The
achievement of
Panasonic
high resolution
in-line
color CRTs.**

How did we do it? With a preconverged in-line tube/yoke combination unlike any other. Our precision S/ST (saddle/saddle toroidal) deflection yoke is ideally matched to each tube, for near perfect convergence, high repeatability and stability over a wide range of operating conditions.

We combine it with a specially-designed OLF (overlapping field lens) gun and unitized grid construction, providing spot uniformity across the entire screen and near-Delta resolution.

The result: a triumph over the convergence factor. Find out what it can do for your next color terminal or monitor, and ask about our full line of quality color and monochrome CRTs. Write or call: Panasonic Industrial Company, Computer Components Division, One Panasonic Way, Secaucus, N.J. 07094; (201) 348-5278.

**Panasonic
Industrial Company**

Circle no. 5

Editor: Kenneth I. Werner
Managing Editor: Hildegard Hammond
Contributing Editor: Ronald Cohen
Departments Editor: Lynne A. Henderson
Art Director: Hildegard Hammond
Advertising Manager: Jay Morreale
District Sales Managers: Ted Lucas (West), Stephen Steeves (Midwest), Becky Akers (East)

Editorial Advisory Board

Dr. Ifay F. Chang, Chairman
Director of Research
Institute of Systems Science
National University of Singapore

Dr. Frederic J. Kahn
Vice President
Greyhawk Systems, Inc.

Koh-Ichi Miyaji
Professor
Shibaura Institute of Technology

Jan Rajchman
Consultant

Aron Vecht
Director
Phosphor Consultants

INFORMATION DISPLAY (ISSN 0362-0972) is published monthly for the Society for Information Display by Palisades Institute for Research Services, Inc., 201 Varick Street, New York, NY 10014; David Slater, Chief Executive Officer; Leonard H. Klein, President; Harold R. Summer, Vice President; Hildegard Hammond, Secretary; Laura Mangone, Treasurer.

EDITORIAL AND BUSINESS OFFICES: Palisades Institute for Research Services, Inc., 201 Varick Street, New York, NY 10014; telephone 212/620-3371. Send manuscripts to the attention of the Editor, ID.

DISTRICT SALES OFFICES: WEST—Ted Lucas, P.O. Box 852, Cedar Glen, CA 92321; telephone 714/337-6627. MIDWEST—Stephen Steeves, Patis/3M, 4761 West Touhy Avenue, Lincolnwood, IL 60466; telephone 312/679-1100. EAST—Becky Akers, Patis/3M, 310 Madison Avenue, Suite 1804, New York, NY 10017; telephone 212/953-2121.

SID HEADQUARTERS, for correspondence on subscriptions and membership: Society for Information Display, 8055 West Manchester Avenue, Suite 615, Playa del Rey, CA 90293; telephone 213/305-1502.

SUBSCRIPTIONS: Information Display is distributed without charge to those qualified and to SID members as a benefit of membership (annual dues \$35.00 U.S. & Canada; \$50 elsewhere). Subscriptions to others: U.S. & Canada: \$36.00 one year, \$64.00 two years, \$90.00 three years, \$3.00 single copy; elsewhere: \$72.00 one year, \$128.00 two years, \$180.00 three years, \$6.00 single copy.

PRINTED by Sheridan Printing Company, 1425 Third Avenue, Alpha, NJ 08865. Third-class postage paid at Alpha, NJ.

POSTMASTER: Send address changes to Society for Information Display, 8055 West Manchester Avenue, Suite 615, Playa del Rey, CA 90293.

PERMISSIONS: Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limits of the U.S. copyright law for private use of patrons, providing a fee of \$2.00 per article is paid to the Copyright Clearance Center, 21 Congress Street, Salem, MA 01970 (reference serial code 0362-0972/88/\$2.00+\$0.00). Instructors are permitted to photocopy isolated articles for noncommercial classroom use without fee. This permission does not apply to any special reports or lists published in this magazine. For other copying, reprint or republication permission, write to Society for Information Display, 8055 West Manchester Avenue, Suite 615, Playa del Rey, CA 90293.

Copyright © 1988 Society for Information Display. All rights reserved.



Bulls in the glass shop

"The news of my death," said Mark Twain, "has been greatly exaggerated." Much the same can be said of the cathode-ray tube; but at the age of 91 (counting from Karl Ferdinand Braun's invention of a "cathode-ray indicator tube" in 1897), the CRT not only refuses to die, it refuses to get old.

With remarkable grace, the CRT has confronted the challenges placed before it: color, increasing resolution, increasing (and variable) scan rate, squarer and flatter screens, dramatically larger sizes, and (on a developmental basis) wider aspect ratios. Except for very small and very large displays, or where volume, weight, or power consumption are overriding factors, CRTs provide the highest level of performance and the lowest cost of all available technologies.

This remarkable record stems from the basic nature of the device and a great deal of creative science and engineering that has gone into CRT development. The most recent advances would have been impossible without advanced computer-aided engineering tools that incorporate a sophisticated understanding of electron physics, electromagnetics, materials, finite-element analysis, mathematical programming, and computer graphics.

In this issue, Dennis Bechis discusses modern gun, lens, and yoke design, and how these now depend on computer models. Bob Mathew looks at the problems new CRT applications and market directions present to bulb designers and manufacturers. And Bob Lin discusses the increasing use of automated testing and calibration in CRT manufacturing.

The CRT's mastery of new applications results in projections of a remarkably stable share of the information-display market, despite the impressive technical advances of flat displays. In a panel discussion on the future of displays held at the March meeting of the National Computer Graphics Association in Anaheim, chairman Carl Machover noted that the CRT market share today is 85%, with flat panels having 15%. He then challenged panel members Tom Maloney, Alan Sobel, Larry Tannas, and Jim Wurtz to present their projections of CRT market share in 1998. There was some variation, but Jim Wurtz's estimate of 75% seemed to be the median response. Larry Tannas diplomatically refused to make a projection but did say that, in light of the typical 10:1 price differential, "for any task, flat panels will be used only where CRTs won't fit."

With good reason, CRT manufacturers and system integrators can bullishly look forward to their immediate technical and commercial futures.

—Kenneth I. Werner




Highlight your Displays with HOYA's imaging.

The Hoya tradition of excellence continues with engineering for the emerging fields of flat panel Display, Information Processing and Electro-Optics. Our extensive new quality line of glass and thin-film materials incorporates the latest imaging and process technology services.

Integral to these new materials is Hoya's exclusive transparent and electro-conductive *ITO thin-film* on precision glass substrates. Major quality, yield and cost advantages include:

- Low defect Indium Tin Oxide: extreme surface cleanliness
- Optimized film uniformity: purity and stability
- Specialized film structure: precision etchability
- Flexible film character: resistivity vs. thickness
- Special SiO_2 undercoat and/or SnO_2 over coating
- To 14" x 14" size: volume thin-film deposition

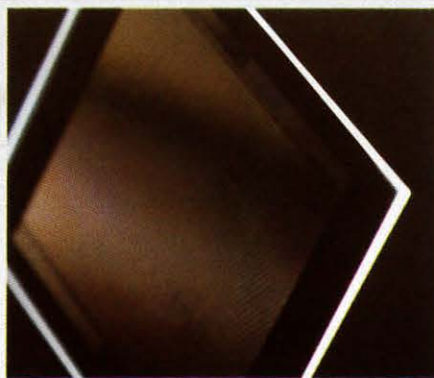


Optimum product quality is ensured by virtue of Hoya's precision glass polishing and cleaning process, and our unique multicarrier packaging.

In precision glass, thin-film blanks, imaged panels, and large blanks/masks, Hoya's diversity meets the demanding requirements of; flat panel displays, electro-optic devices, large area electronic circuits, anti-reflection/polarizing films, and sensor/solar cell technology.

Look to Hoya as your complete source for all flat panel component design and imaging needs. We have the material and process know-how to support your end product success.

Contact us, we'll make it work for you. In CA: (408) 435-1450; in NJ: (201) 307-0003, in TX: (214) 450-4410.

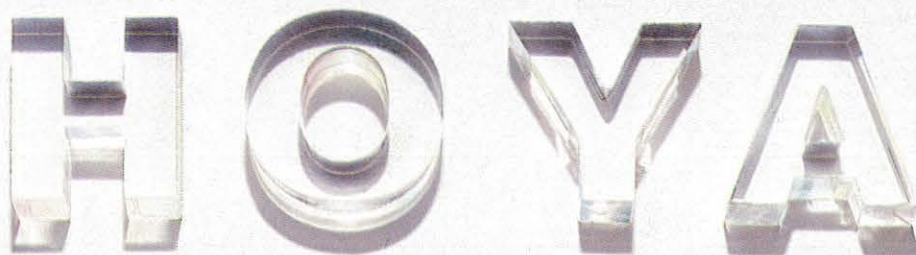

The image of tomorrow.

Circle no. 6

A Measure of Reality



Spatial Convergence Measurement for CAD/CAM and Graphic Art Displays. Until now, measuring the alignment of a CRT's three color beams under dynamic conditions was an impossibility. EG&G Gamma Scientific has made this demanding measurement a reality. The CII-CNV Spatial Radiometer system measures the three electron beam landings independently, yet simultaneously. Errors introduced by measuring each beam with the remaining two turned off are completely eliminated. The result? Measurements that reflect *actual operating conditions*. And a true measure of convergence reality.

Entire Display Characterization — With No Moving Parts. Another EG&G exclusive. Without moving the measurement system or the display under test, the GS-1000 measures luminance, spot size, color and deflection *over an entire display*. And because it relies solely on display beam motion, under the control of your computer, the system can be used by an operator with minimum training.

Budget Sensitive? EG&G's complete line of spatial systems starts off with our low priced DR-2550M Scanning Microphotometer. With its internal microprocessor, the DR-2550M delivers uncompromised measurement accuracy. Regardless of the application or budget, EG&G continues to set the industry standards. For solutions to your light measurement needs, contact your EG&G representative today.

Light,
Intelligently
Measured



EG&G GAMMA SCIENTIFIC
Intelligent Solutions for Today's Light Measurement Needs

3777 Ruffin Road • San Diego, California 92123 • (619) 279-8034 • Telex: 69-7938 • Fax: (619) 576-9286 • Cable: GAMSISDG

ENGLAND: Metax Limited • Tel: (44) 892-46533

FRANCE: RMP • Tel: (01) 47.00.28.00

GERMANY: Polytec GMBH • Tel: (49) 07243-6040

ITALY: DB Electronic Instruments S.R.L. • Tel: (02) 6469341

JAPAN: Midoriya Electric Company Ltd. • Tel: (03) 561-8851

NETHERLANDS: Koning en Hartman Elektrotechniek B.V. • Tel: 015-609906

SWEDEN: C. R. Hintze Trade AB • Tel: 08-767 90 40

SWITZERLAND: GMP S. A. • Tel: 021-33 33 28

The CRT is the User's First Impression of Your System.



Make it a Good One with Clinton CRTs

Let's face it, all the dramatic data processing innovations in a new product are worthless to your customer if the CRT screen doesn't perform.

That is why leading manufacturers have trusted Clinton CRTs for years. They know Clinton CRTs deliver reliability and performance every time.

Plus, Clinton's range of monochrome CRTs and phosphor types allow you to choose the most ergonomic end-user interface.

Clinton Responds to Market Demands.

Clinton is prepared to meet the ever changing demands of the computer and workstation industry. That means you'll get the high quality CRTs you need, and in the latest configurations that will give your product increased appeal.

Innovations like Flat Profile CRTs and Spectrum Segmented

Phosphor CRTs have contributed to Clinton's reputation as an industry leader.

And now Clinton has added a 17" and 20" CRT to their Flat Profile CRT Series. These new tubes are specially designed to meet the need for increased display area in workstation applications.



*Clinton's 17" & 20"
Flat Profile CRTs are ideal
for Workstation Applications.*

Team Up With Clinton.

Clinton is more than a CRT supplier. We are ready to team up with your company to provide a CRT that will enhance your new product design.

And with engineering and extensive manufacturing capabilities based in the United States, Clinton can accommodate the most stringent "Just-in-Time" delivery schedules with competitively priced CRTs.

When you are looking for a monochrome CRT and you want to ensure your new product's success, Clinton's the *only* choice.

Clinton Electronics Corporation
6701 Clinton Rd. • Rockford, IL 61111
815/633-1444
Telex: 687 1504 CECRK
Telefax: 815/633-8712



**CLINTON
ELECTRONICS
CORPORATION**

SID Executive Committee

President: L. E. Tannas, Jr.
Vice President: W. F. Goede
Treasurer: P. M. Heyman
Secretary: A. I. Lakatos
Past President: J. A. van Raalte

Regional Directors

Bay Area: H. Sherman
Canada: J. Wright
Dayton: R. Holmes
Delaware Valley: S. Filarsky
Detroit: Z. Yaniv
Europe: C.J. Gerritsma
Japan: M. Ashikawa
Los Angeles: P. Baron
Mid-Atlantic: H. Funk
Minneapolis/St. Paul: T. Werner
New England: D. Heller
San Diego: R.E. Thoman
U.K. & Ireland: A. Woodhead

Committee Chairmen

Academic: L. Weber, L. Todd, Jr.
Archives/Historian: R.C. Knepper
Bylaws: A. Silzars
Chapter Formation: J. Erskine
Conferences
IDRC—R. Durbeck
Symposium—T. Credelle
Definitions & Standards: P. Keller
Honors & Awards: W. Howard
Intersociety: W. Hamilton
Memberships: T. Nelson
Nominations: J. A. van Raalte
Publications: T. Curran
Proceedings Editor: S. Sherr
Information Display Editor: K. I. Werner
Publicity: J. Price
Group Formation
Workstations—R. Schmah
Hard Copy—W. Lloyd

Chapter Chairmen

Bay Area: C. Infante
Canada: A. Moffat
Dayton: W. Watkins
Delaware Valley: R. Seifert
Detroit: J. Erskine
Japan: C. Suzuki
Los Angeles: P. Baron
Mid-Atlantic: T. Nelson
Minneapolis/St. Paul: V. Born
New England: W. Hamilton
San Diego: J. Lipscombe
U.K. & Ireland: N. Bartlett

Office Administration

Headquarters Office Manager: Bettye Burdett

Society for Information Display

8055 W. Manchester Ave., Suite 615
Playa Del Rey, CA 90293
213/305-1502

president's message



I am very pleased and honored to have been elected president of the Society for Information Display. I have some ideas that I believe will further strengthen our society.

First is strengthening the chapters. On the morning before the May meeting of SID's board, I scheduled a seminar for organizing good chapter meetings. Peter Baron (Los Angeles Chapter chairman) and William Hamilton (New England Chapter chairman) shared some tricks with all who came. Additionally, we proposed having the chapters host

the January and September SID board/symposium meetings with a one-day technical session like the one held in New England last year. We also inaugurated at the SID Symposium the first annual off-shore chapter luncheon. I see this as a very important event at future symposia.

The second item is our national office. I dare say that for our size we have the finest headquarters of any professional organization. Mrs. Bettye Burdett has done an excellent job in managing it. I believe, however, that the board has understaffed the office and has grown accustomed to not asking for the services that a national office could provide. But one doesn't miss the services one never had. Our need for growth is more subtle, and exists primarily in the need for more directories, more mailings, more promotion and sales of our publications, and more support to the society's executives.

The third item is to strengthen the role of the board itself. This is more in spirit than in deed. The society's bylaws clearly define the role of the board. I am implementing them to the fullest extent. A specific point that requires attention is that a board member and, therefore, the whole chapter he represents, loses his vote when he can not come to a meeting. I have initiated a change in our bylaws to enable the board member's chapter chairman to exercise his proxy vote when appropriate.

The fourth issue is the most critical. If you have been watching the SID budget, you are aware that the SID journal's financial situation has been unacceptable. I don't believe the solution is to throw in the towel, but to find remedies—and promising new remedies are in place. I had previously thought we could not afford a journal of the scope to which we had become accustomed. Our experience level is now much higher and I believe substantial progress toward solving the affordability problem was made by our previous publications chairman Phil Heyman. Our new publications chairman Tom Curran will bring new ideas and experience to the task of ensuring we meet our budget and publication objectives.

I have given each of the committees new goals and am looking forward to a vigorous year. I need your support and advice. Tell me what the society needs and/or how you would like to help. SID has been an exciting and vital organization. Together we can enhance its vitality even further.

—Larry E. Tannas, Jr.

Guns and yokes—computer aid for modern designs

BY DENNIS J. BECHIS

THE DEVELOPMENT of sophisticated computer tools is keeping the standard direct-view shadow-mask color CRT young and dynamic, even at nearly 40 years of age. Driven by rapidly expanding markets for high-resolution color graphics, computer monitors, and giant-screen consumer televisions, and by the realization that higher definition television systems are coming, a number of companies have recently used computer modeling to design electron guns and deflection yokes that yield greatly improved resolution with designs that are more manufacturable and cost effective.

Computer potentials

Every CRT engineer has wished, after viewing a poorly performing CRT, that he had used a different grid in the electron gun. With the advent of computer programs that accurately simulate electron optics in three dimensions, a gun designer can calculate in less than 20 min the effect of a new grid on the high-current corner spot. If he has already simulated a large number of different gun geometries, he

can rapidly view the corner spots that result from different grid thicknesses or shapes, and change from one gun design to another as if the stainless-steel grid were as malleable as putty.

The advent of three-dimensional electron-optical computer codes in the late 1970s and early 1980s led to startling innovations in electron gun designs for CRTs. The software called POT3D, for

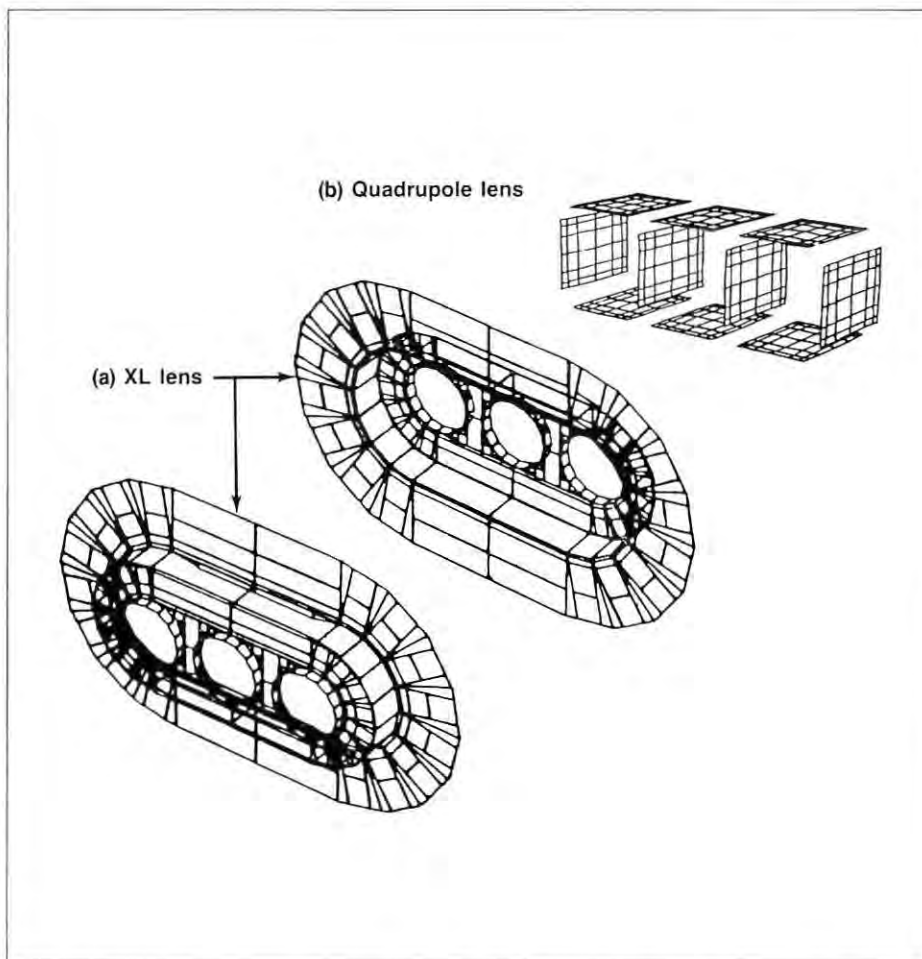


Fig. 1: Computer models of (a) RCA's XL lens, and (b) a three-beam quadrupole lens.

Dennis J. Bechis is a member of the technical staff at the David Sarnoff Research Center, a Subsidiary of SRI International, Princeton, New Jersey. In the early 1980s, he was a member of the team that designed and developed the COTY family of electron guns and yokes for RCA's color picture tubes. He has an undergraduate degree in astronomy from Harvard College and a doctorate in high-energy physics from the University of Maryland.

Relative Trajectories in Vertical Plane and Resulting Corner Spots

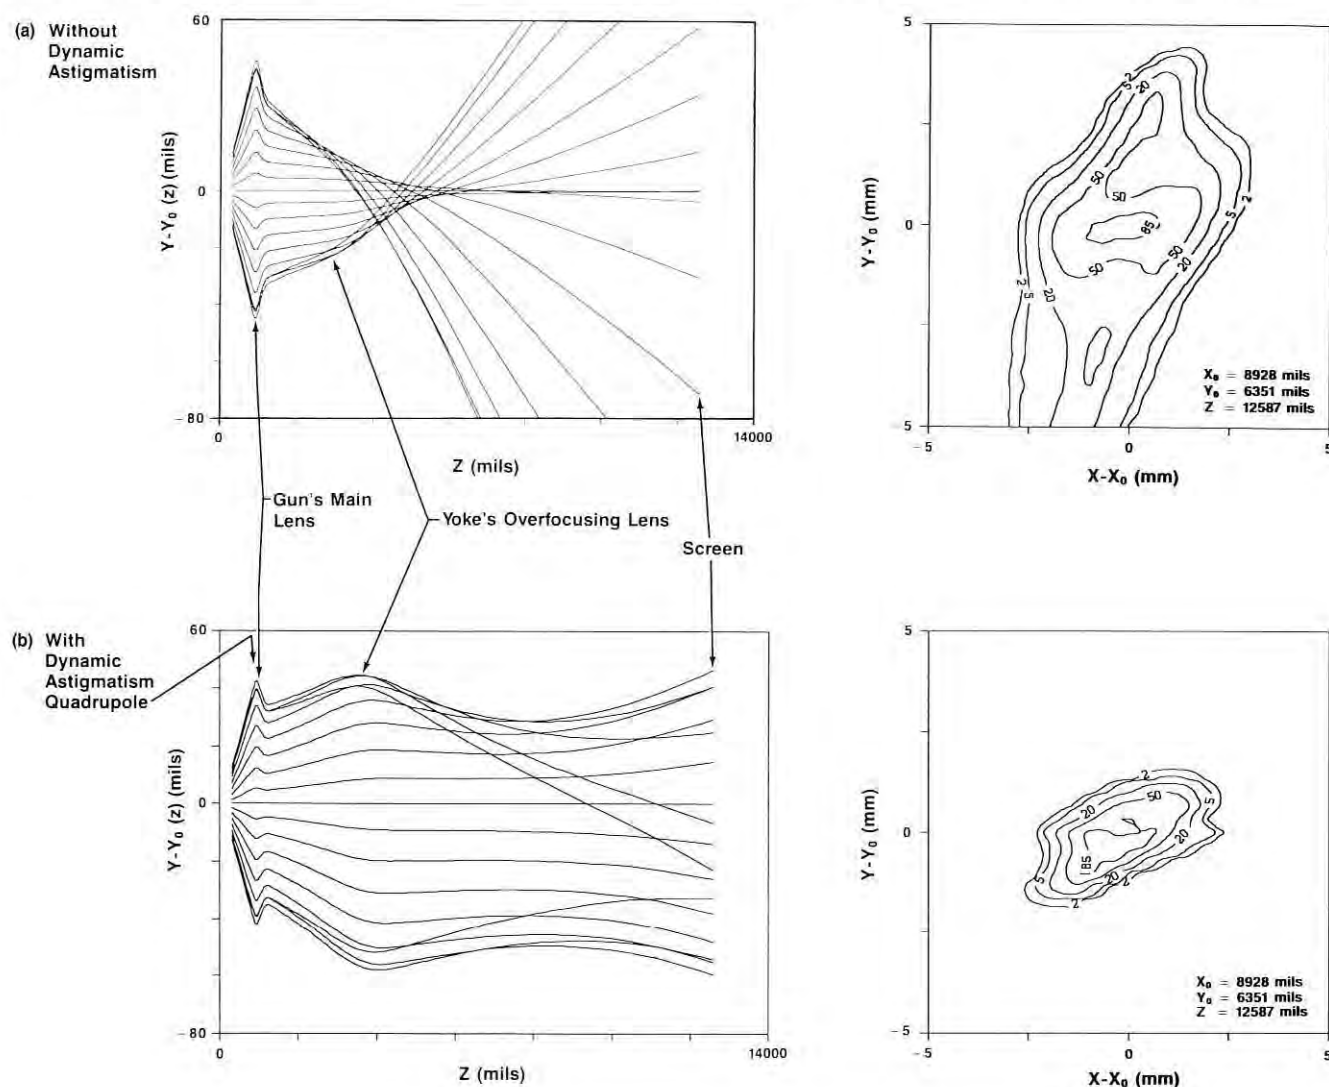


Fig. 2: BEAM3D simulations of 4-mA beams deflected to the 2 o'clock screen corner of a 25V 110° self-converged CRT for two cases: (a) without dynamic astigmatism correction, which results in vertical overfocusing, and (b) with correction by a dynamic quadrupole lens. The trajectories of electrons in the vertical plane are presented relative to the trajectory of the beam's center.

example, which was developed in 1979 at what is now the David Sarnoff Research Center, solves in three dimensions for the electric potential and field in a region surrounded by conductors. POT3D was a major tool in the design of the noncylindrically symmetric XL lens for RCA's COTY guns. In the XL (for "expanded lens"), the three electron beams are focused and converged by the electric field in an open, bathtub-shaped region that lies between two planes of round apertures [Fig. 1a]. Without POT3D, enormous time and effort would have been re-

quired to achieve an anastigmatic focus at the same voltage for all three beams and to simultaneously ensure the center-screen convergence of the beams. The XL lens was revolutionary because it realized two goals that common wisdom held could not be achieved simultaneously. First, it reduced convergence errors at the screen by decreasing the beam-to-beam spacing in the gun and, second, it reduced the best-focus spot size by lowering the spherical aberration of the main lens.

Many of the nonsymmetric lenses that have been developed—the overlapping

field (OLF) lens of Matsushita, the conical field focus (CFF) lens of Philips, and the elliptical aperture (EA) and elliptical aperture, concave surface (ES) lenses of Hitachi—were designed with the assistance of three-dimensional electrostatic field- and potential-solving codes.

But the early computer programs used to design these lenses could not accurately predict the size of deflected spots at the screen because they could not perform the complicated three-dimensional computation of space-charge forces arising from the mutual repulsion of electrons. Pro-

grams that ignore space charge predict spots that may be 2 or 3 times smaller than measured spots. So, although many of these codes were (and still are) powerful tools, detailed design optimization of CRTs still required the construction and evaluation of many CRT prototypes.

Dynamic quadrupole lenses

Recently, a number of companies have developed electron guns that employ dynamic electrostatic quadrupole lenses to greatly improve resolution along the sides of the screen [Fig. 1b]. These lenses dynamically correct the severe vertical astigmatic overfocusing suffered by electrons in a beam as the beam is deflected horizontally by a self-converged yoke [Fig. 2a]. If uncorrected, the overfocusing leads to a very tall spot at the screen's corner and a significant loss in vertical resolution. In many of today's CRTs, this major drawback of self-converged yokes is alleviated by putting slots in the gun's triode, and/or "stigmators" into the gun's main lens. But these fixes have the

undesirable side effect of increasing the height of spots at the center of the screen.

Dynamic quadrupole lenses, on the other hand, make it possible to achieve excellent resolution at the corner and sides of the screen without sacrificing resolution at the screen center. By applying a voltage to the six horizontal plates [Fig. 1b] that is higher than that on the four vertical plates, beams passing through the quadrupole on their way to the main lens are made to diverge in the vertical plane with sufficient speed to compensate for the yoke's strong overfocusing [Fig. 2b]. Because the amount of overfocusing depends on the beam's landing position on the screen, the voltages on the correcting quadrupole and on the neighboring grids must be modulated dynamically at both horizontal line and vertical field frequencies by special circuitry.

Computer modeling has led the way to electron-gun designs that require only a single dynamic voltage waveform, that reduce the necessary voltage modulation, that do not dynamically upset the center-

screen convergence, and/or that reduce the likelihood of damage from arcing.

Improved triodes

Significant improvements in resolution have also been achieved through the development of higher performance triodes. The split G2 triode of Thomson Consumer Electronics and the aberration-reducing triode (ART) of Philips and Matsushita both employ strong focusing lenses in the triode to improve the focusing quality of a beam [Fig. 3]. These lenses reduce the effective source size by shortening the region along the z-axis in which the electrons cross. In turn, the smaller source is imaged to a smaller spot at the CRT's screen.


Another way these novel triodes improve resolution is by fanning the electron trajectories apart. When the beam reaches the main lens, the current distribution along the beam's diameter is nearly uniform, without the "hot core" of beams created by conventional triodes. These hot core electrons are very close

PENN-TRAN

Stator Yokes



High Voltage Power Supplies to 30KV

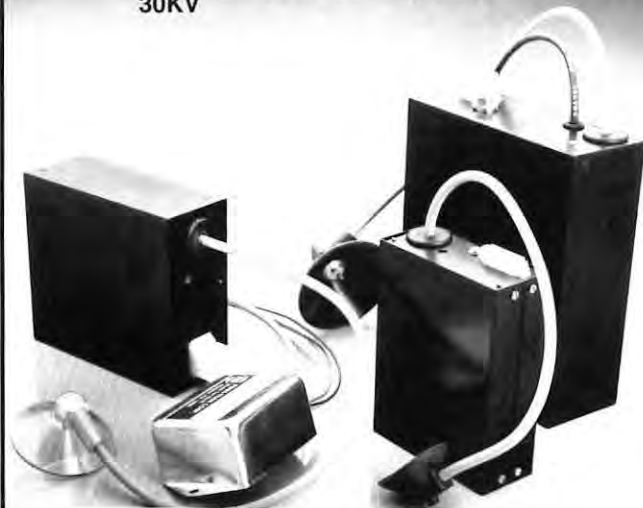

Penn-Tran Corporation, Route 144 North, P.O. Box 1321, Wingate, PA 16880
814-355-1521 Telex 706473 FAX 814-355-1524

Circle no. 9

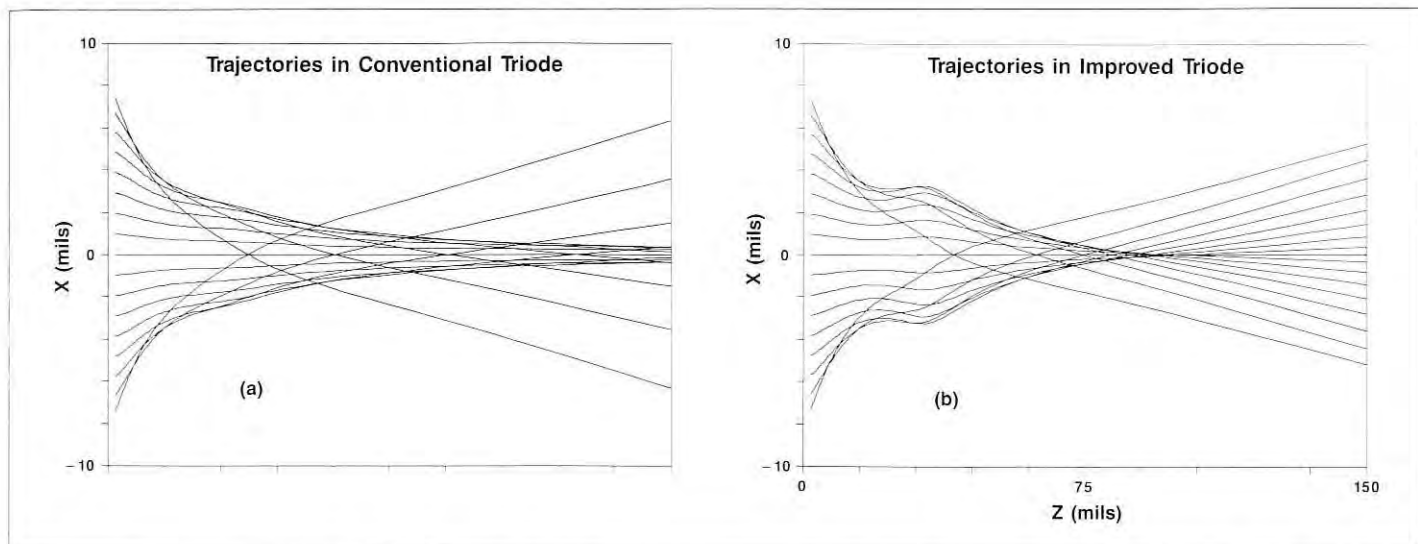


Fig. 3: BEAM3D simulations of 4-mA beams in (a) a conventional triode, and (b) an improved triode, showing the more concentrated z-axis electron crossings.

together, so space-charge forces are high and the beam spreads severely as it drifts from the main lens to the screen. At beam currents over 2 mA, the novel triodes

yield spots 30–50% smaller than those generated by conventional triodes.

Reduced space-charge spreading is a very important issue for giant-screen tubes

because the spreading's contribution to spot size scales as the square of the gun-to-screen distance. Moreover, to make giant-screen tubes as bright as smaller

MINOLTA METERS THE MEASURE OF EXCELLENCE

© 1987 Minolta Corporation

FOR ACCURATE NON-CONTACT COLOR MEASUREMENT, NO OTHER METER COMES CLOSE.

Minolta's new CS-100 Chroma Meter achieves precision and comes close to everything else. Everything else, that is, in the way of light sources or surface colors that you might otherwise find difficult to measure.

Just point it and instantaneously read the luminance value of light sources or objects which are either too hot, too distant, too small, too inaccessible or for any reason simply not to be touched. Our spot colorimeter's built-in memory will also give you the difference between any two such sources or objects automatically.

And the CS-100 is just one of Minolta's full line of light and color measurement instruments. For more information, including our 21 page booklet "Precise Color Communications," please call (201) 825-4000 or write: Minolta Corporation Industrial Meter Division, 101 Williams Dr., Ramsey, New Jersey 07446.

When you need precise measurements, you just can't touch it. **ONLY FROM THE MIND OF MINOLTA.**



MINOLTA

Circle no. 10



CRTs, higher beam currents are used. This increases the space-charge spreading even more and, in addition, overloads conventional cathodes. In response to these issues, Matsushita, for instance, is introducing into its 45-in. tube an ART triode and a dispenser cathode, which can provide the higher current required without shortening cathode life.

Computer simulation has aided the design of high-performance triodes. With their computer tools, Philips designed a vertical slit in the G1 electrode of the 45AX gun to provide a static partial compensation for deflection defocusing; the design was optimized to achieve simultaneous ART behavior in both the horizontal and vertical planes. Using the BEAM3D program created at the Sarnoff Center, Thomson Consumer Electronics learned that the improved performance of a split G2 triode is lost with only very small misalignments of the grids. Since then, BEAM3D has helped to find designs whose performance is much less sensitive to grid misalignment.

Yoke developments

Sophisticated programs to calculate the magnetic field generated by a deflection yoke have also had a major impact on CRT development. YOKE, software developed in the early 1970s at the Sarnoff Center, calculates the magnetic potential created by a cylindrically symmetric ferrite core with windings lying in planes. Since RCA's yokes were then mostly "planar-wound" toroidal, YOKE successfully analyzed them and corrected their deflection problems. A new YOKE program was completed in 1979 that could model fully three-dimensional windings adjacent to the ferrite core. This program is now the mainstay of yoke design activity at Thomson Consumer Electronics, where engineers also use it to design the arbors for winding saddle yokes.

Computer-aided field fudging

A number of companies have written computer programs to design magnetically permeable pieces of metal that shape the yoke's magnetic field in a specific way. The Sarnoff Center's COMA program greatly speeded up the process of designing the small field-forming permeable parts called shunts and enhancers, which are positioned at the end of the gun to correct vertical coma—a deflection error in which the green beam does not land vertically on the centroid of the red and

blue beams at the 6 and 12 o'clock positions on the CRT's screen.

Shunts and enhancers correct coma well in consumer picture tubes of conventional size, but they face severe limitations in giant-screen CRTs and computer monitors. The very long gun-to-screen distance in giant CRTs magnifies any residual coma error from slight misalignments between shunts, enhancers, and the yoke field. At the high horizontal scan rates used in computer monitors, shunts and enhancers can no longer correct coma because of the long recovery time of eddy currents. So, in these applications, shunts and enhancers are being replaced by coma-correcting field-formers that attach to the rear of the yoke and couple only to the slowly varying vertical magnetic field. Using computer simulation, Matsushita designed coma-free deflection yokes of this type for their 26-33-in. picture tubes.

Large permeable pieces on the front of the yoke can shape the vertical deflection field to correct east-west raster distortion, which is aggravated by the flatter faceplates of today's CRTs. Computer programs that model permeable pieces in magnetic fields promise to streamline this work.

Design optimization by computer simulation

BEAM3D, a software system produced by Sarnoff physicists and mathematicians in 1983, simulates the motion of an electron beam from the cathode to the screen and incorporates a rigorous three-dimensional treatment of space-charge forces. Comparing hundreds of simulations with measurements of real picture tubes has convinced BEAM3D's developers and users of the program's accuracy and ease of use.

Engineers at Thomson Consumer Electronics use BEAM3D predictions with confidence. Because corner spot simulations take less than 20 CPU min on an IBM 3090, engineers use the program to develop and evaluate novel designs—and to quickly traverse the optimization path of a particular design before building an expensive prototype. By assembling simulated guns in the computer with misaligned, tilted, or incorrectly spaced grids, engineers can determine how these errors degrade a design's performance. This information is used to find less sensitive designs and to specify part and alignment tolerances. Both approaches minimize factory scrap rates.

The future


Engineers, scientists, and mathematicians have successfully developed a wide range of computer tools and demonstrated their basic capabilities. As these design tools become more fully integrated, facilitating the exchange of information among them and their users, they will lead to more sophisticated CRT systems. The 1990s will bring CRT system designs in which the capabilities of guns, yokes, shadow masks, bulbs, and circuitry are more thoroughly utilized, and in which the components are designed to perform together in more optimal ways. To speed the handling, comparison, and visual interpretation of this data, convenient interfaces are being developed for use on multiwindow graphics workstations. Such an interface enables the user to create and arrange windows showing color-coded images of BEAM3D-simulated corner spots at different settings of the focus voltage, for example, while examining two views of an equipotential surface in the XL lens in other windows [see cover photo]. Workstations with rapid updating would allow a designer to use a "mouse" to slide up and down scales of voltage and grid thickness and see the corresponding spot in real time. At the David Sarnoff Research Center, our goal is to develop an integrated easy-to-use system of design software that will be useful for many years to come. We feel the time and effort is well worthwhile because color CRT technology still has a long and technically interesting future ahead of it.

Acknowledgments

My thanks to Walter Paul, Roger Alig, Joanna Alexander, and Nurit Binenbaum of the David Sarnoff Research Center for the computer graphics; to David Laur and Kirk Alexander of the Princeton University Graphics Laboratory for the use of their equipment in generating the cover photograph; and to Robert Barbin of Thomson Consumer Electronics for steering our software to usability by his cooperation, encouragement, and support.

Notes

More information on these topics can be found in the following paper and its references: D. Bechis et al., "BEAM3D: Computer Simulation of CRT Electron Beams with Full Three-Dimensional Space Charge, Thermal Spread, and Electrostatic/Magnetic Fields," *Digest of Technical Papers, 1988 SID International Symposium* (May 1988), paper 8.1. ■

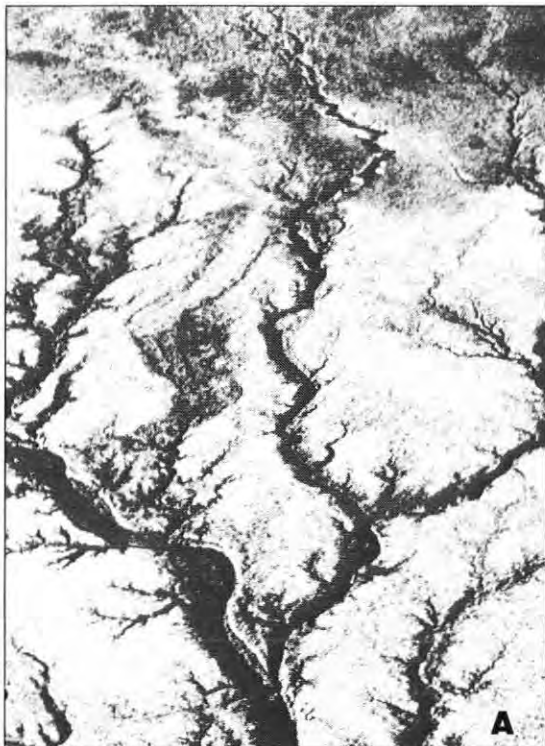

Delta or Aorta? Which is Which?

No problem here because both of these images were processed on Raytheon's new TDU-850 Thermal Display Unit.

The TDU-850 is the only thermal recorder to display true grey levels (not mere halftone representations) at such high speeds and resolutions. Utilizing 203 dots per inch, the unit offers 64 grey levels and can provide 256 grey levels through the use of super pixels. The TDU-850 is your assurance of high quality images. Standard units about \$5,000. (Slightly higher overseas). RS-170 video and IEEE-488 computer interfaces are available.



When you must know what you're looking at, look for equipment that knows what to look for. For details call or write **Marketing Manager, Recorder Products, Raytheon Company, Submarine Signal Division, 1847 West Main Road, Portsmouth, RI 02871-1087.** Phone: (401) 847-8000.

Raytheon

A. Satellite view of river delta. **B.** Arterial angiogram.

Note: These began as continuous tone images which were processed in black and grey by a TDU-850. The TDU-850 images, however, had to be converted to conventional halftones in order to be shown in this magazine. Thus the high quality of the original TDU-850 images have been obscured. For true results ask to see a demonstration.

Automated CRT inspection and alignment

BY ROBERT LIN, JR.

AS CRT MANUFACTURERS strive for higher standards of product quality, they are finding traditional testing and calibration procedures to be too slow, too inconsistent, and too resistant to statistical analysis. One approach to these problems, now being used by some companies, is advanced automated test systems incorporating machine vision.

The machine-vision portion of such a system typically incorporates one or more CCD cameras, a video monitor so the operator can see the test images, and a vision processor (probably integrated with the system controller) for digitizing and manipulating captured or live images. Special software packages can program the system to perform image analysis, gray-scale processing, image enhancement, frame testing, character recognition, brightness readings, and color determination, as appropriate for various applications.

In the systems built by CR Technology, we have found PC-AT compatible microcomputers to be effective programmable system controllers that perform the needed functions well. Communications and network software are readily available, making it easy to implement communication and interface functions. Existing statistical packages can work with the system software for documentation, data logging, and failure analysis right on the controller.

Robert Lin, Jr., is an applications engineer at CR Technology, Inc., Laguna Hills, California.

In the old-fashioned way

Manual CRT adjustments to the yoke, magnets, and various potentiometers are still widely used on CRT manufacturing lines. Here, operators visually inspect images on the CRT under test and adjust the test image so it conforms to a template that is laid over the screen. This process is used to regulate raster height, width, rotation, and centering, and both pincushion and barrel distortion. In addition, the monitor is generally inspected for alignment, focus, linearity, brightness, color purity, and convergence. Because of control location, the inspector must often make the adjustments while viewing the CRT image in a mirror. In many cases the inspection and adjustment criteria depend heavily upon the operator's judgement, which varies with fatigue, experience, discretion, and eyesight.

Manual adjustment and inspection is a bottleneck in automated production environments and presents other difficulties as well. First among these is that the template/overlay approach does not easily give quantitative data on the pass-fail results of a given CRT. Second, operator fatigue and variations between operators make it impossible to guarantee adjustment repeatability. Third, throughput and quality of adjustment are directly related to the operators' individual experience and judgement.

Automated solutions

The limitations of manual CRT alignment systems are obvious, but fully automated systems are often too costly because of current CRT designs. The locations of the

magnets and yoke do not usually allow easy robotic access; most existing CRTs were designed for manual adjustment and require the dexterity of a human operator. (It is only recently that manufacturers have begun incorporating electronic adjustments in their new CRTs to permit fully automated adjustment).

A semiautomated approach seems to offer the most generally applicable solution at this time [Fig. 1]. It addresses the drawbacks of overlay/template CRT adjustment and inspection by enhancing the capabilities of the operator rather than by replacing him. In addition, it can provide a powerful engineering tool by accurately recording quantitative data for product evaluation and failure analysis. Though semiautomated for adjustment and calibration, such a system can function as a fully automated accept-reject inspection system.

Our system—one example

CR Technology's CRT-480 is a semiautomated adjustment and calibration system built along these lines. In this system, interactive graphics and menus guide an operator through systematic procedures that bring the CRT's various adjustments within predetermined tolerances. Systems already installed have succeeded in helping their operators obtain consistently precise adjustments, quantitative data, higher throughput, and better operator learning curves. Total adjustment time is generally less than 2 min, with test tolerances between 0.5 and 2.0 mm. Comparable figures for manual systems are 3-7 min and 2 or more mm. In its automated inspection mode, the



Fig. 1: Semiautomated CRT adjustment uses machine vision and a graphic interface to enhance the operator's performance. In this adjustment for image height, the screen of the CRT under test is imaged by CCD cameras and sent to an image processor and an Intel 80386-based microcomputer. When the operator has set the height to within the programmed tolerance, the test system provides visual and audio confirmations. In a manufacturing environment, such a test system would be placed on the production line.

semiautomated system can usually verify all test criteria and log the data in less than 15 sec.

Making semiautomated adjustments

One key to enhanced productivity is a graphic interface that clearly correlates different visual prompts with specific adjustments [Fig. 2]. These visual indicators are displayed on the system's monitor. When the CRT under test is in proper adjustment, the operator receives both visual and audio confirmation. A typical adjustment sequence brings up visual prompts for the operator to adjust the CRT for brightness, rotation, tilt, centering, vertical height, horizontal width, pincushion and barrel distortion, linearity, and focus, in that order.

The first parameter, brightness, is adjusted to the factory's setting for the CRT. Rotation/tilt and centering are adjusted by the centering rings of the yoke, so that the center of the raster is centered

with respect to the monitor bezel. The yoke is also rotated to assure that the CRT image is not tilted, which can be determined to $\pm 0.5^\circ$. Vertical height and horizontal width are usually adjusted with potentiometers that control the appropriate electronic circuitry. These measurements are taken with respect to the monitor's bezel.

Pincushion and barrel distortion require adjustments to the magnets of the yoke in order to correct distortion seen at the corners and sides of the raster, which can be kept under 1.5%. This, also, is measured with respect to the monitor bezel. Focus is generally corrected by a potentiometer adjustment. The final prompt is for a linearity check, which examines relative image size over different areas of the CRT's face.

Go, no-go

In the inspection mode, the system determines whether the selected parameters fall

within allowable tolerances. For color monitors, these parameters include color purity and convergence. The color purity test assures that the colors produced by the CRT are correct for hue, intensity, and saturation. Optionally, the location of any impurity can be included in the test data.

The convergence test determines whether the beams from all three electron guns are, at any instant, striking the same location on the CRT shadow mask to within 0.05 mm. Failures are generally due to defects in the shadow mask, the electron gun, or the associated electronics.

Directions

Manufacturers of both moderate-volume computer monitors and high-volume television sets are using semiautomated adjustment and testing systems, and are expressing satisfaction with the productivity and flexibility of the approach. Electronic adjustments will eventually make fully automated systems the preferred choice for high-volume manufacturers who are not required to do very many different combinations of functional tests or to test to different tolerances by their various customers. But for moderate-volume manufacturers with customers who desire special testing sequences, semiautomated systems should remain the most effective solution. ■

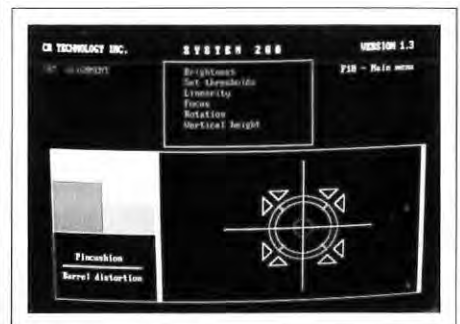


Fig. 2: The graphic interface for adjusting pincushion and barrel distortion speeds one of the more time-consuming CRT adjustments. When the raster outline is completely within the programmed tolerances, as it is here, the adjustment is complete. Occasional CRT units resist adjustment—bringing one corner within tolerance throws out another corner. An appropriately programmed test system can record the time taken to complete each adjustment, providing early warning of developing production difficulties.

Without glass, it's not a tube

BY R. L. MATHEW

THE GLASS BULB of a color cathode-ray tube (CRT) is much more than a "bottle" for containing the electronics and screen. Rather, it is a carefully designed pressure vessel consisting of three parts: the panel (face), the funnel (main body), and the neck (electron gun enclosure).

Each of these parts is engineered from a different glass composition to meet specific requirements [Fig. 1]. The different glasses must closely match each others' physical properties over the wide temperature range they must withstand during the transition from glass bulb to TV tube [Table 1]. The parts will be frit sealed at a temperature of 445°C for 35 min and reheated to almost 400°C during the exhaust (or evacuation) process.

And these are precision parts. The face, in addition to being a window for viewing the phosphor screen, is a carefully designed member of the pressure vessel that must withstand impact and serve as the structural support for the aperture mask and frame. The inside curvature is specified to a tolerance of 0.012 in. for a 27V screen, and the roughness of the inside surface is held to $\pm 3 \times 10^{-6}$ in.

Modeling the bulb

The customer's dimensional requirements for a bulb drive the physical

design. These requirements stem from such tube attributes as deflection angle, face contour, yoke contour, and overall size. The bulb designer must incorporate these into a vessel that meets the criteria for bulb strength, ease of manufacture, and processability.

The variables that control bulb strength are shape and thickness. Areas commonly left unspecified by the customer's basic requirements are panel thickness distribution and funnel-body shape and thickness. These constitute "degrees of freedom" for the glass designer.

Computer programs created at Corning can produce a three-dimensional representation of virtually any bulb configuration, including the polynomial face-contour descriptions that characterize many of the new-generation designs. Funnel shapes and thicknesses can be easily manipulated, as can the size, height, and thickness of the panel. For any given geometry, the stress at every location on the bulb can be evaluated using the finite-element method. The designer can adjust shape and thickness through an interactive process until he achieves a satisfactory design [Fig. 2a and b].

At this stage, the customer approves the analysis and the resulting design. Sometimes a viable design can not be generated within the scope of the initial specification. In that case, the glass designer and the customer must work together to arrive at a satisfactory alternative, which was the case in the early stages of bulb development for Zenith's flat tension-mask tube.

After design approval, the same data used to describe the bulb for analysis is

used to generate the detailed shape information needed by the customer for chassis and cabinet design. Simultaneously, the information required for the final-product drawing, dimensional specification, and gauge design is extracted from this data. The same data generate the mold shape. The mold size is determined by adjusting the glass dimensions by the appropriate shrinkage factors.

Using the desired glass shape and thickness, as well as the metal thickness profiles required for optimum mold performance, the programs generate detailed three-dimensional descriptions of all the mold parts. This data is used to define the numerical-control machining and inspection of the molds and is transferred to the computer-aided design (CAD) system for inclusion in the mold drawings.

New products—new challenges

New products featuring flatter faces, squarer corners, larger sizes, different mask-frame suspension systems, different surface coatings, higher voltages, varying tints, and differently shaped yokes are forcing glass design into uncharted waters; far more radical demands are being placed upon the glass parts than ever before.

The glass manufacturer has a responsibility to provide a CRT envelope that is unquestionably safe to use, can be converted into a tube at profitable processing rates, has the requisite electrical and optical characteristics, and gives the set-maker a tube shape with consumer appeal. This is a tall order, but not an impossible one.

R. L. Mathew is manager of market development for video products at Corning Glass Works, Corning, New York. P. J. Goldman, D. J. Lopata, and G. D. Wightman made significant contributions to the article.

Strength and safety

Bulbs must withstand a nearly perfect vacuum for several years, which means they must have sufficient mechanical strength. Bulb strength is tested by applying hydrostatic pressure of at least 3 times atmospheric pressure to a bulb whose surface has been abraded to simulate long-term aging.

The bulb must, of course, be hermetic and not become "gassy" after a period of time. This is evaluated by testing the glass and the fired sealing glass with a high-voltage breakdown and other tests that exceed operational levels.

In addition to sufficient mechanical strength, the tube must have a design that

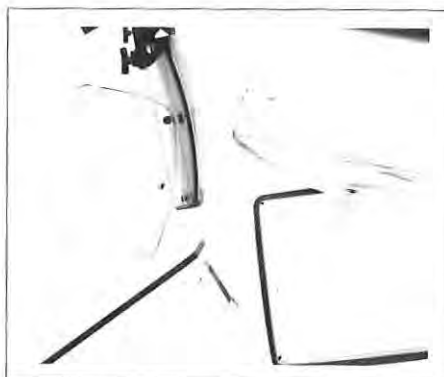


Fig. 1: CRT funnels and faceplates are carefully engineered parts that must perform a variety of mechanical, optical, and electronic functions.

allows the tubemaker to place a safety device, such as a tension strap, on the tube. Should the tube break through contact with an errant baseball bat, for instance, the safety device would prevent the glass from injuring someone in front of the set. Underwriters Laboratories and the Canadian Standards Association insure that these safety devices work.

Photons, glass, and electrons

Color CRTs operate at accelerating voltages in excess of 25 kV. With the iron aperture mask and barium-getter materials as targets, x-radiation is produced inside the tube. X-ray leakage beyond the TV set must not exceed U.S. government

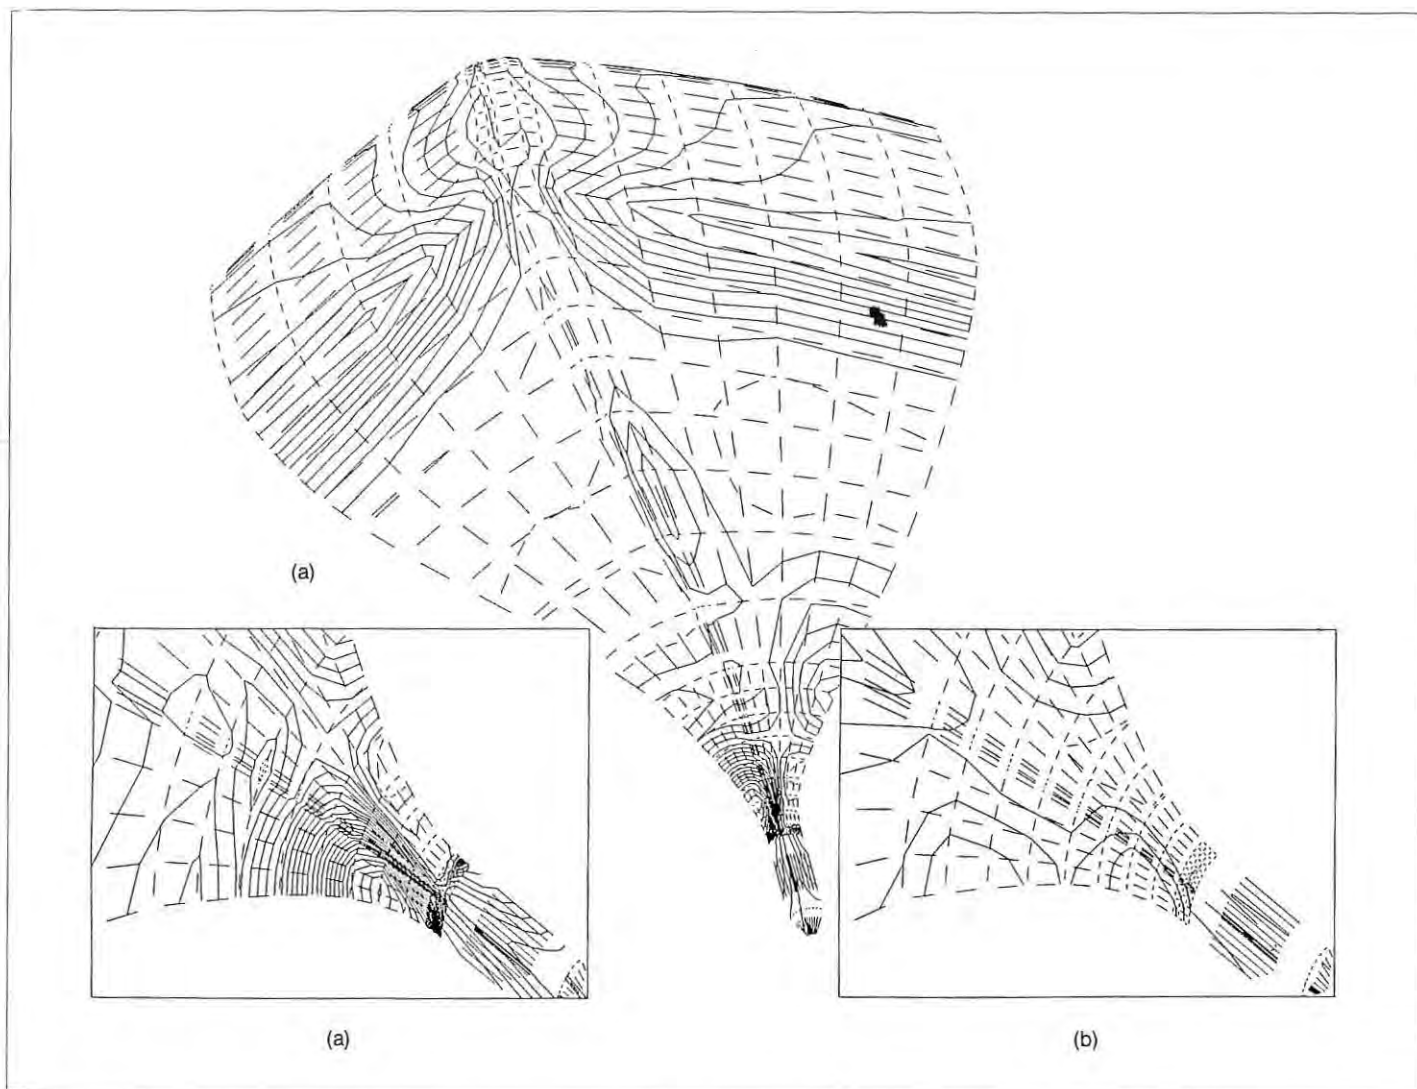


Fig. 2: (a) The surface stress contours for the first analysis of a new 31V bulb design showed that redesign was necessary. The high density of the stress contour lines indicates a stress of greater than 2300 psi in the yoke area [see inset], which exceeded the design criteria. (b) In the final design, bulb maximum stress was reduced by 50% and is now below the design stress limit. The high stress in the yoke area was eliminated by a change in the funnel shape.

Approaching ZERO DEFECTS



PEG CRT BULBS

- Continuous Process Control
- More Uniform Wall Thickness
- 1/2" to 7" Diameter Range
- Low Tooling Cost
- Prototype Design Work
- Better than Machine Made Round CRT Bulbs

The Leader in Hand-Crafted CRT Bulb Blanks

For details call 609/691-2234.

PEG

**PRECISION ELECTRONIC
GLASS, INC.**

1013 Hendee Road
Vineland, NJ 08360
FAX: 609/691-3090

Circle no. 12

Table 1: Properties of Video Glasses in Current Use

	Glass/Coating Code				
	Panel 9061	Funnel 0138	Neck 0137	Projection Panel 9039	Monochrome 9008
Thermal expansion coefficient $\times 10^{-7}$ cm/cm/ at 0°C to 300°C	99.0	97.0	97.0	96.4	89.0
Viscosity data					
Strain point, °C	460	435	436	458	406
Annealing point, °C	501	474	478	500	444
Softening point, °C	688	654	661	680	646
Linear absorption coefficient at 0.6 Å min (cm ⁻¹)	28.0	62.0	90.0	35.0	21.5
Density, gm/cc	2.695	2.980	3.180	2.900	2.640
Poisson's ratio	0.23	0.24	0.23	0.24	0.24
Refractive index Na D line (0.5893 μm)	1.518	1.565	1.550	1.553	1.506
Log ₁₀ of dc volume resistivity					
25°C	17+	17+	17+	18+	17+
250°C	9.2	9.7	10.1	9.59	9.4
350°C	7.5	7.6	8.3	7.67	7.4
Dielectric properties at 1 MHz and 20°C					
Dielectric constant	6.97	7.92	8.60	5.44	6.3
Loss tangent	0.0013	0.0011	0.0011	0.0007	0.0017

maximum-radiation levels, which are 0.5 mR/hour at failure-mode conditions. The glass composition is designed to absorb the x-rays, and the glass's absorption coefficient is routinely tested. The glass must also not discolor as a result of being bombarded by the electrons and x-rays.

Glass composition also determines color, transmissivity, and dielectric strength. Color is important because it affects the color of light transmitted from the tube's phosphor screen. Together with transmissivity, it determines contrast ratio. Dielectric strength must be high because the CRT acts much like a capacitor and must withstand high operating voltages without breaking down.

Surviving production

The glass parts of the bulb must be able to endure the tubemaker's manufacturing

processes without breaking. The most demanding operations are the rapid high-temperature thermal processes, such as the one in which the faceplate is joined to the funnel by melting a layer of glass frit that has been deposited between them. Another is the exhaust bakeout process, which heats the bulb to a high temperature while simultaneously imposing high-vacuum stresses upon it. As tubes become larger, flatter, thicker, and more square, developing glass envelopes that will survive at standard production rates is becoming more difficult.

Another process that can not be neglected is the take-apart, in which defective tubes are disassembled to salvage good components. By simulating the process under laboratory conditions, the designer can often modify the disassembly steps to salvage the newer, more radical designs.

Looking into the crystal bulb

Future CRT enclosure designs will certainly offer challenges to glass system designers and manufacturers. Three new directions currently in developmental or early commercial phases are: very large sizes of over 40V; high-definition television (HDTV), which will require a 3:5 aspect ratio and tighter specifications; and thin flat CRTs.

Large sizes and flat faces each require greater strength. The simple solution—increasing glass thickness—is not always the cost-effective one because increased thickness causes increased thermal-processing time, not to mention increased weight. When these considerations are combined with others, it is clear that more sophisticated designs will be required. The physical constraints of current technology may limit the manufacturability and cost-effectiveness of some of these new designs, making new glass systems and manufacturing processes necessary. ■

40 years of Corning CRTs

Corning Glass Works has worked with the technology and manufacturing of glass for CRTs for 40 years and has made many contributions to the technology, such as non-browning x-ray absorbing glass compositions; solder glass (frit) for color CRT sealing; multiform parts for electron guns; and many glass melting, forming, and finishing processes. Development projects included radar bulbs in the early 1940s, monochrome television in the late 1940s and 1950s, and color CRTs in the 1960s.

Corning began making parts for black-and-white picture tubes in 1948 in Corning, New York. It currently operates CRT glass-manufacturing operations in the United States, North and South America, and Korea, and

has built turn-key plants in Eastern Europe and Asia.

During the past few years, great efforts have been made to improve image appearance by flattening the faces of CRTs. These attempts range from the flatter squarer shapes first introduced by the Japanese in 1983 and 1984 to RCA's development of the square-planar tube and, most recently, to Zenith's development of the flat tension-mask (FTM) tube. Corning was heavily involved in the development of the Zenith tube. With its absolutely flat face, skirtless (rimless) panel design, and thicker glass sections, it is the most significant change to have taken place in CRT construction in the past 30 years.

—R.L.M.

Draw from a full line

Corning now offers more than 120 types of small special-purpose CRT bulbs, ranging in size from .5" to 17", in round, rectangular, and fiber optic designs.

Non-browning bulbs are also available for optimum performance displays in high-voltage applications.



And the superior light transmission of Corning bulbs offers the brightness required for military applications, such as cockpit displays.

We can also deliver small bulbs with precision tolerances for high-resolution applications. Neck

diameters are consistently held to within 0.005", and alignment of centerface to neck varies no more than 0.040".

Call on Corning for all your bulb needs. You can order off-the-shelf, or we can custom design bulbs to your specs.

To get free technical information about Corning's CRT bulbs, circle the reader service number.

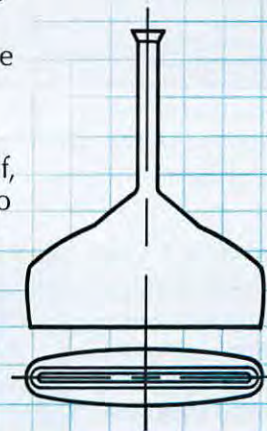

CORNING



Materials Business
Corning Glass Works
MP 21-3-4
Corning, NY 14831
(607) 974-4305



Our smallest performer gives a brilliant display.

Among special purpose cathode ray tubes, the Hughes Model H-1401 one-half inch tube for helmet-mounted displays outclasses and outsells any similar tube in the industry. Its high brightness and fine resolution characterize our entire line. Hughes is the leader in the design and production of special purpose CRTs—a leadership position maintained by ongoing research and development that sets industry standards for innovation and refinement in CRT technology.

Hughes special-purpose CRTs range in size from one-half-inch diameter to thirteen inch diagonals. They serve avionics, ground vehicles, manportable displays, helmet-mounted displays and high-performance commercial applications such as phototypesetting and medical research.



Model 1401, actual size.

Hughes has one of the world's finest engineering and technical facilities devoted to CRT production. High manufacturing and testing standards result in the production of tubes of consistent performance, outstanding brightness and resolution factors, low power consumption and high reliability.


For total CRT capability—off the shelf or custom—look to Hughes. You are invited to examine our facilities and

discuss your exact requirements. Call (619) 931-3587 or write: Hughes Aircraft Company, 6155 El Camino Real Carlsbad, CA 92009

HUGHES
AIRCRAFT COMPANY

ONE DESIGN ENGINEER CHOSE SYNTRONIC AS THE YOKE SUPPLIER...

THE OTHER IS STILL WAITING.

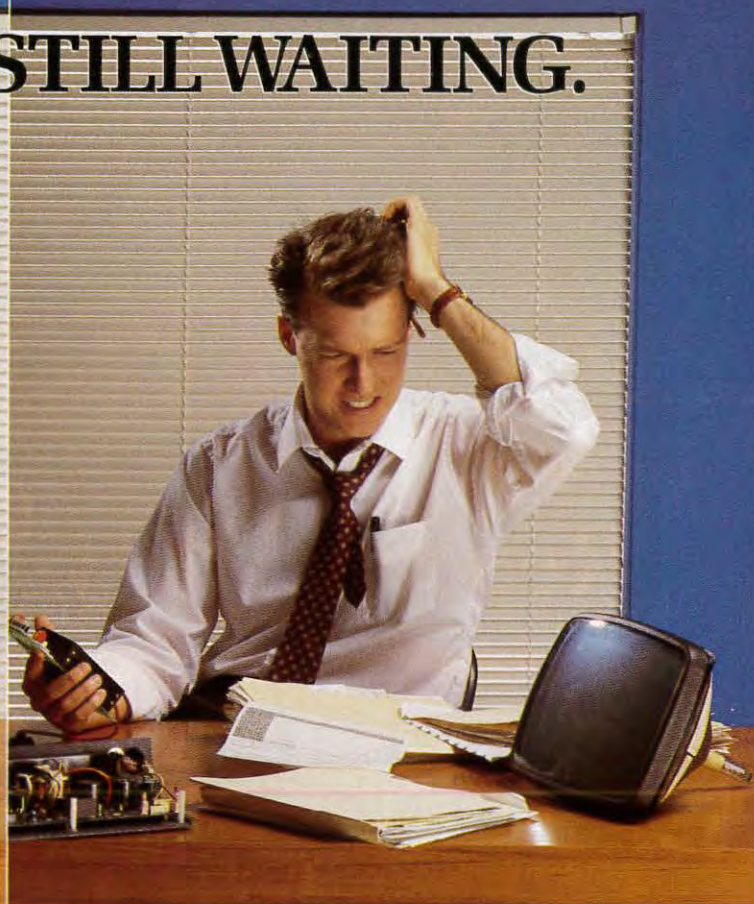

Syntronic

You can trust Syntronic not only for high-quality deflection components, but to deliver on every promise as well.

Instruments

Delivers

We're more than a supplier. Syntronic engineers team with your design personnel to make

sure your display specifications are met. And when we pledge to create a product for you, we do it. No excuses. No delays. This value-added level of support is unmatched.

Our precision components are known throughout the industry as the standard of excellence. In fact, we pioneered display system technology. And today we are the largest custom designer of deflection yokes, focus coils, beam alignment/shaping coils, micro-positioner alignment devices and related CRT mounting hardware.

The Syntronic expertise in magnetic components will continue to meet the display challenges of avionics, military ground and shipboard, medical imaging, and demanding color systems.



You can't afford broken promises. Trust the people who take your needs as seriously as you do. Contact Syntronic today.



syntronic

Syntronic Instruments, Inc.
100 Industrial Road
Addison, IL 60101
Phone (312) 543-6444

Celco YOKES



for
Best
Repeatability



Circle no. 16

LASER PMT X-RAY IMAGING TUBE CRT?

If you're developing a quality product,
Call 1-800 634-0740
to get the right high-voltage power supply.

We'll recommend the best, most cost-effective package with all the features you need. You can count on it.

IHVE has been manufacturing quality high-voltage power supply systems for display and medical applications in Danbury, Connecticut since 1977.

We are also exclusive North

American distributors for Bonar Wallis Hivolt, who have been manufacturing quality high-voltage devices in the UK since 1972. Some of the Bonar Wallis Hivolt packages are designed and approved for military and airborne environments.

Give us a call, and we'll do our best to make your system development succeed.

International High Voltage Electronics, Inc.

An affiliate of LORAD Medical Systems, Inc.

In Connecticut, 1-792-7820
FAX 1-203 743-3370

Finance Drive
Danbury, CT 06810

Circle no. 17

SID honors and awards

Nominations are now being solicited from SID members for candidates who qualify for SID Honors and Awards.

- **FELLOW.** Conferred annually upon a SID member of outstanding qualifications and experience as a scientist or engineer in the field of information display, and who has made a widely recognized and significant contribution to the advancement of the display field.
- **KARL FERDINAND BRAUN PRIZE.** Awarded for an outstanding *technical* achievement in, or contribution to, display technology.
- **JOHANN GUTENBERG PRIZE.** Awarded for an outstanding *technical* achievement in, or contribution to, printer technology.
- **BEATRICE WINNER AWARD.** Awarded periodically (but not more than once a year) to a SID member for exceptional and sustained service to SID.
- **SPECIAL RECOGNITION AWARDS.** Granted to members of the technical and scientific community (not necessarily SID members) for distinguished and valued contributions to the information display field. These awards may be made for contributions in one of more of the following categories: (a) outstanding technical accomplishments; (b) outstanding contributions to the literature; and (c) outstanding service to the Society.

Nominations for SID Honors and Awards should be concise, but they must include the following information, preferably in the order given below.

1. Name, Present Occupation, Business and Home Address, and SID Membership Grade (Member or Fellow) of Nominee.
2. Award being recommended:
Fellow*
Karl Ferdinand Braun Prize
Johann Gutenberg Prize
Beatrice Winner
Special Recognition

*Fellow nominations must be supported and signed by at least five SID members.

3. Proposed Citation. This should not exceed 30 words.
4. Name, Address, Telephone Number, and SID Membership Grade of Nominator.
5. Education and Professional History of Candidate. Include college and/or university degrees, positions and responsibilities of each professional employment.

continued on page 27

THOMSON-CSF



THE FURTHER WE GO, THE FURTHER YOU GO.

Thomson-CSF is your winning partner for professional display tubes and devices. Whether your applications are in radar, avionics, defense, industry or medicine, you can be sure of our technology for reliability and performance, even under the most adverse conditions.

Our vast CRT range incorporates the latest models for video projection, short head-up and head-down displays, helmet-mounted displays, ground/airborne monochrome and color radars, photographic data recording, instrumentation, etc.

And our proven AC plasma panels offer the ultimate in readability and ruggedness for medium and high density graphics display, in all environments.

With manufacturing plants in Europe and the US, we are at hand to let you benefit

Special monitor CRTs including ruggedized color radar and helmet mounted displays



Ac ruggedized display panels. Tireless, flicker-free display. Up to 1,280 x 1,280 dots.



from our quality products with the best customer care. Just as we did for major programs worldwide.

In radio and television, telecommunications, military and civil aviation as well as in a wide range of scientific and medical applications, Thomson-CSF knowhow gets your systems moving. Fast.

The sharpest image devices in the world.



Very high definition CRTs.
Linewidth as small as 20 μ m.
Flat optical glass screens of up to 205 mm dia.



Very high brightness projection CRTs.
Up to 175,000 cd/m².
Dispenser cathodes.



THOMSON-CSF
ELECTRON TUBES

THOMSON ELECTRON TUBES AND DEVICES CORPORATION
550 Mount Pleasant Avenue
P.O. Box 6500
DOVER, New Jersey 07801.
Tel.: (1-201) 328-1400. TWX: 7109877901.
Fax: (1-201) 328-1747.

Brazil: SÃO PAULO
Tel.: (55-11) 5421722
Tx: (01) 24226 TCSF BR

Canada: MONTREAL
Tel.: (1-514) 288 41 48
Tx: 5560248 TESAFI MTL

Deutschland: MÜNCHEN
Tel.: (49-89) 78 79 0
Tx: 522916 CSF D

España: MADRID
Tel.: (34-1) 405 19 15
Tx: 46033 TCCE E

France: BOULOGNE-BILLANCOURT
Tel.: (33-1) 49 08 26 26
Tx: THOMTUB 20072 F

Italia: ROMA
Tel.: (39-6) 639 02 48
Tx: 620883 THOMTE I

Japan: TOKYO
Tel.: (81-3) 264 63 46
Tx: 2324241 THCSF J

Sverige: TYRESÖ
Tel.: (46-8) 742 02 10
Tx: 522916 CSF S

United-Kingdom: BASINGSTOKE
Tel.: (44-256) 84 33 23
Tx: 858121 TECL UK G

U.S.A.: DOVER N.J.
Tel.: (1-201) 328-1400
Twx: 7109877901

Circle no. 18



IEEE



IEEE CS



GI



VDE



HAMBURG, MAY 8-12, 1989
CCH: Congress Center Hamburg

VLSI and Computer Peripherals

An Interdisciplinary Conference Including Information Displays with SID Cooperation

Main Conference Topics:

1. VLSI, External Memories and Storage

Storage systems and devices based on semiconductor, magnetic, optical and other technologies · Hierarchies and system architectures of external memories and storage · Intelligent interfaces to peripheral memories

2. VLSI and I/O Terminals

I/O Systems and Devices for the Human Interface · Displays. e.g. CRT, LCD, ELD, PDP · Printers, e.g. inkjet-, thermal-, laser-printers · Keyboards, digitizers, scanners, mouse devices · Speech I/O · Human factors, e.g. noise-, glare-reduction, paper-handling, SW-assisted functions

3. VLSI, Sensors and Controls

Smart sensors, smart actuators, and data processing systems applied in: robotics, process control, automotive and traffic control, medical-, environmental-, alarm- and security systems etc.

4. VLSI and Computer Communication

Smart solutions for communication with peripherals:
Advanced bus systems for direct attachment of peripherals to workstations and host systems · Advances in industrial Local Areal Networks for plant floor automation, extended office systems etc. · Integrated networks, the capability of ISDN and of other integrated networks to support peripherals · Heterogeneous communication systems, supporting a mix of peripherals from one or more manufacturers

5. VLSI Technologies and Trends

Selection of technology · Standard vs. custom design · Advanced design tools · Design for noisy environment · Low temperature technology · Packaging · Advanced testing concepts

Author Schedules	500-1000 word summaries due:	August 15, 1988
	Notification of acceptance:	October 1, 1988
	Camera-ready copies due:	February 1, 1989

The conference language is English

Please ask for more information and send summaries and correspondence to:
Prof. Hans Reiner SEL Research Center ZT/FZB, Holderaeckerstr. 35, 7000 Stuttgart 31, FRG.
Phone 00 49 - 711 - 83 62 - 210. Tx 7 21 940, Ttx 00 49 - 711 - 83 62 - 185.

id classified

consultants

Howard W. Grossbohl
CONSULTANT
Cathode Ray Tubes
Cathode Ray Tube Displays
805-581-1467

1988 IDRC

international display research conference

hyatt islandia
san diego, california
october 4-6

presenting basic research
and early development work
in display and related
hard-copy technologies

sponsored by SID, IEEE, AGED

for information call
212/620-3388

awards

continued from page 24

6. Professional Awards and Other Professional Society Affiliations and Grades of Membership.
7. Specific statement by the nominator concerning the most significant achievement or achievements or outstanding technical leadership which qualifies the candidate for the award. This is the most important consideration for the awards committee, and it should be specific (citing references when necessary) and concise.
8. Supportive material. Cite specific evidence such as patents, publications, SID activities, other technical and/or professional society activities, evidence of outstanding leadership, etc. Please be specific and concise. Cite material

that directly supports the citation and statement in (7) above. Limit the evidence to the most important patents, publications, or service—do not generalize. (The nominee may be asked by the nominator to supply information for his candidacy.)

9. References. Fellow nominations must be supported by the references indicated in (2) above. Supportive letters of reference will strengthen the nominations for any award.

Send the complete nomination—including all the above material—to the Honors and Awards Chairman by **October 1, 1988**.

Dr. Webster E. Howard, Chairman
Honors and Awards Committee
IBM T.J. Watson Research Center
P.O. Box 218
Yorktown Heights, NY 10598
914/681-5620



Advanced Display Engineer/Scientist

Apple Computer Inc., has an opportunity for a Display Engineer/Scientist to play a key role in developing advanced display technologies for Apple's future products.

You'll need a BS in EE or related field, (advanced degrees preferable), and at least three years' experience in CRT or flat panel data display design. Excellent written and verbal communication skills, as well as the ability to work independently are essential. Experience and/or an educational background in analog design, physics, and optical engineering are all pluses.



To apply, send your resume to APPLE COMPUTER, INC., Dept. CE24SID, 20525 Mariani Ave., MS9-C, Cupertino, CA 95014. An equal opportunity employer.



The power to be your best.™

©1988 Apple Computer, Inc. Apple and the Apple logo are registered trademarks of Apple Computer, Inc.

Circle no. 20

sustaining members

Ad-Vance Magnetics, Inc.
AEG Corp.
Alphasil, Inc.
Amunel Manufacturing Corp.
Applied Films Lab, Inc.

Babcock Display Products
Ball Electronic Systems Div.
BDH Ltd.
Bell-Northern Research, Ltd.
Bendix Corp.
Brewer Science, Inc.
Burle Industries, Inc.

Canon, Inc.
Cardion Electronics
CELCO
Cherry Electrical Products Corp.
Clifton Precision/Special Devices
Clinton Electronics Corp.
Computing Devices Co.
Connector Corp.
Corning Glass Works

Dale Electronics
Data Images
David Sarnoff Research Center, Inc.
Digital Electronics Corp.
Displays Inc.
DISCOM/Display Components, Inc.

EEV, Inc.
EG&G Gamma Scientific
Electronic Display Systems, Inc.
Electro-Plasma, Inc.
Endicott Research Group, Inc.

Ferranti-Packard Electronics, Ltd.
Futaba Corp.

GEC Avionics, Inc.
General Atronics Corp.
General Electric Co.
GML Information Services
GTE

George D. Harris Assoc., Inc.
Hartman Systems
Hazeltine Corp.
Hewlett-Packard Co.
Hitachi, Ltd.
F. Hoffman La-Roche & Co., Ltd.
Hoya Optics, Inc.
Hughes Aircraft Co.
Hycorn, Inc.

IBM Corp.
Imaprop Corp./Imaprint Design, Inc.
Incom, Inc.
Industrial Electronic Engineers, Inc.
Infodex, Inc.
Interstate Electronics Corp.
Inter-technical Group, Inc.
ISE Electronics Corp.

K & R Engineering Sales Corp.
Kollmorgen Corp. Photo Research
Div.

Leader Instruments Corp.
Litton Panelvision Corp.
Litton Systems Canada Ltd.
Litton Systems, Inc. (2)
Los Alamos National Laboratory

Magnavox Government & Industrial
Electronics Co.

Magnetic Radiation Laboratories
Microfield Graphics, Inc.
Microphase Laboratories
Microvision
Minolta Corp.
Mitsubishi Chemical Industries
America, Inc.
Mitsubishi Electronics America, Inc.
Monitronix Corp.
Murata-Erie North America, Ltd.

NEC Electronics, Inc.
NEC Home Electronics (USA), Inc.
Norden Div. United Technologies
Corp.
NYNEX Science & Technology

OKI Electric Industry Co., Ltd.
Optical Coating Lab., Inc.
Optical Radiation Corp.
Orwin Associates, Inc.
Ovonic Imaging Systems, Inc.

Penn-Tran Corp.
Philips Electronics, Ltd.
Phosphor Products Co., Ltd.
Photonics Technology
Planar Systems, Inc.
Plasmaco, Inc.
Plessey Naval Systems
Precision Electronic Glass, Inc.
PTK/Rantec Div. Emerson Electric Co.
Quantum Data Inc.

Racal Microelectronic Systems
Rank-Brimar, Ltd.
Raytheon Co.
The Report Store
Ricoh Co., Ltd.
Rogerson Kratos Corp.

SAI Technology Co.
Sanders Associates, Inc.
Schott America—Glass & Scientific
Products, Inc.
Sigmatron Nova, Inc.
Singer-Librascope
Sony Corp.
Stanford Resources, Inc.
Supertex, Inc.
Syntronic Instruments, Inc.

Taliq Corp.
Tektronix, Inc.
Test & Measurement Systems, Inc.
Texas Instruments, Inc.
Thomas Electronics, Inc.
Thomson Electron Tubes & Devices
Corp.

UCE Liquid Crystal Displays
United Enclosures, Inc.

Venus Scientific, Inc.
Video Monitors, Inc.
Villa Precision, Inc.
Visual Information Institute, Inc.

Westinghouse Electric Corp.
World Products, Inc.

Zenith Electronics Corp.

index to advertisers

	Page
AEG Corp.	C2
Apple Computer	27
CELCO (Constantine Engineering Labs. Co.)	24
Clinton Electronics Corp.	8
CompEuro '89	26
Corning Glass Works	21
EG&G Gamma Scientific	7
Hoya Electronics Corp.	6
Hughes Aircraft Co.	22
International High Voltage Electronics, Inc.	24
Leader Instruments Corp.	C3

	Page
Microvision	2
Minolta Corp.	13
Panasonic Industrial Co.	4
Penn-Tran Corp.	12
Plasmaco	C4
Precision Electronic Glass, Inc.	20
Quantum Data	1
Raytheon Co.	15
Syntronic Instruments, Inc.	23
Teltron	2
Thomson-CSF	25
VuTek Systems, Inc.	28

Business and Editorial Offices

Recruitment Advertising

Palisades Institute for Research
Services, Inc.
201 Varick Street
New York, NY 10014
Jay Morreale, Advertising Manager
212/620-3371

District Sales Office—West

Ted Lucas
P.O. Box 852
Cedar Glen, CA 92321
714/337-6627

District Sales Office—Midwest

Stephen Steeves
Pattis/3M
4761 West Touhy Avenue
Lincolnwood, IL 60646
312/679-1100

District Sales Office—East

Becky Akers
Pattis/3M
310 Madison Avenue, Suite 1804
New York, NY 10017
212/953-2121

Attention: OEMs, Developers, System Integrators
VuTek Systems is pleased to announce:

FREEZFRAME

FREEZFRAME is the *only* image capture & display board with the ability to superimpose (overlay) CGA/EGA text and graphics on captured video images in **32,768 colors** using a single multi-frequency monitor. This new and unique product, available *exclusively* from **VuTek**, includes software interfaces that can be used with virtually any new or existing programs/languages. Applications include interactive video instruction (IVI/CBT/CAI), photo database programs, desktop publishing, desktop presentations, and your own custom program development.



VuTek
SYSTEMS, INC.

Technology with Vision

For complete information, call
619-587-2800

10855 Sorrento Valley Road
San Diego, California 92121

LEADER



“At lunch today, I learned to use this programmable video generator. And still had time to eat.”

While other RGB video generators take weeks to learn, ours take minutes. No digital training needed. No countless key combinations to learn. No need to use your PC unless you want to. Unlike other generators, Leader's have an integral programmer (LVG-1604A and 1603A) or are available with a programmer unit (1601A). And you can get any of dozens of test patterns simply by touching one clearly marked key.

All the functions you need.

The LVG-1604A lets you test even the most advanced high-resolution CRT's and

wide-band video transmission systems. Present or future.

Analog, TTL and ECL outputs. 125 MHz. 64-color capability. Storage of up to 200 display formats. Wide range of raster architectures, and most common test patterns with both stock and user-designed characters. Ability to change format conditions. These features are easy to learn—but hard to beat.

Now you can choose.

You shouldn't pay for more functions than you need. So call us for a free copy of our full-line catalog. Pick the video generator

that's right for you. Then, in just 30 minutes, we'll show you how to use it. It'll be up and running before you finish your lunch.

Call toll-free
1 800 645-5104
In NY State
516 231-6900

Leader Instruments Corporation
380 Oser Avenue, Hauppauge, New York 11788
Regional Offices:
Chicago, Dallas, Los Angeles, Boston, Atlanta
In Canada call Omnitronix Ltd. 416 828-6221

LEADER
FOR PROFESSIONALS WHO KNOW
THE DIFFERENCE



Select a Leader Video Generator with all the features you need.

Circle no. 22

AC Plasma Displays ...

Not just for big spenders anymore.

For all their superiority, AC plasma displays have always been an expensive proposition.

Until now.

We've eliminated half the address drivers. The result is lower cost than ever before possible.

But that's not all.

Our new energy recovery sustain circuit requires surprisingly little power. This puts AC Plasma well within the reach of battery powered PCs.

As of now, AC plasma displays are no longer for big spenders.

They're for smart ones.

Call us for more details.

PLASMACO

268R Clinton Avenue, Kingston NY 12401 914-338-0201

Circle no. 23