

Volume 9 Number 2 March/April 1972

# Information Display

*The Journal of Data Display Technology*




A Technology Publishing Corp. Publication







A

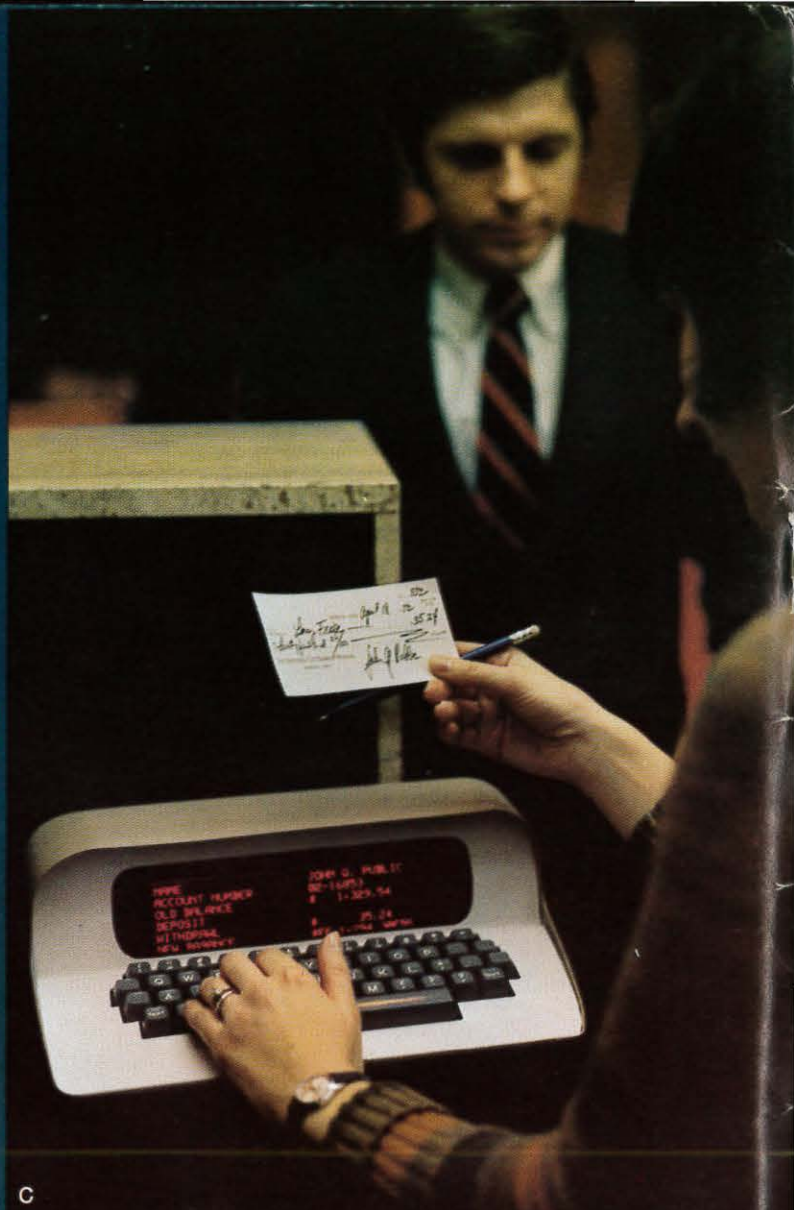


C

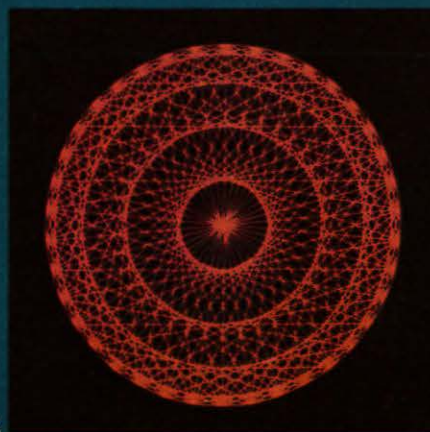


A

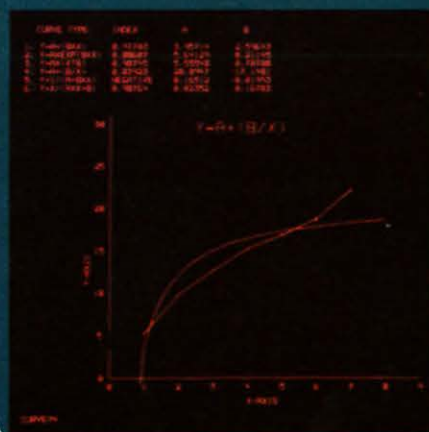

A

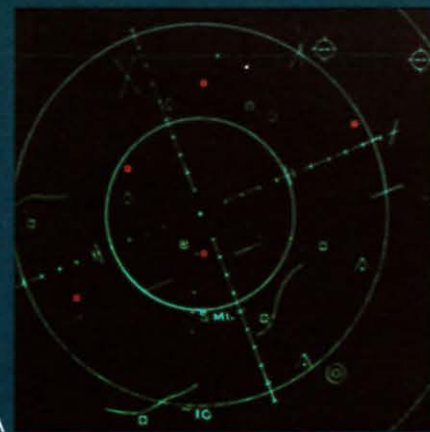

A

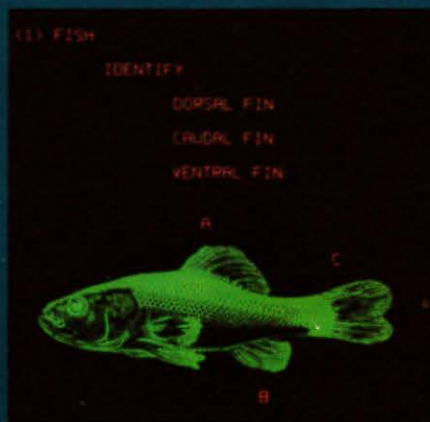

A

DEPARTURES

FLY NO.	SCHED DEPART	GATE NO.	DESTINATION	RE MARK
008	0100	05	WASHINGTON	DEPARTED
535	0114	02	BOSTON	DEPARTED
45	0135	08	MIAMI NON-STOP	BOARDING
50212	0142	09	LANGKATON	BOARDING
485	0146	07	BOSTON	ARRIV OPEN

B

STH	OPEN	HT	LD	CLOSE
OWEN-ILL	47-1-2	47-7-8	47-1-2	47-2-4
GEN MIT	82-3-4	83-1-2	82-3-4	83-1-2
PM T & T	47-3-8	47-3-4	47-2-4	47-3-4

C

A. Digivue 512-60 Display/Memory Unit. An 8½" x 8½" square panel of 512 x 512 lines at 50 lines per inch resolution.

B. Digivue 256-50 Display/Memory Unit. A 5½" x 10¼" panel of 256 x 512 lines at 50 lines per inch resolution.

C. Digivue 64-33 Display/Memory Unit. A 2" x 8" panel of 64 x 256 lines at 33.3 lines per inch resolution.

# Digivue® Display/Memory Units.

## Take a look at tomorrow. You can have it today.

Take a look at Digivue display/memory units from Owens-Illinois. With the kind of visual impact needed in the new age of communication. And then consider this combination of features never before available in any other single display panel:

**Inherent Memory**—Flicker-free display without refresh requirements. Your computer is, in effect, free to perform other operations after addressing Digivue display/memory units.

**Selective Write/Erase**—Digivue display/memory units are digital display devices, with no digital-to-analog conversion necessary. You directly address Digivue display/memory units at individual display points on the panel matrix for selective write or erase at micro-second speeds.

**Drift-Free Images**—The intersections of thin, narrow electrodes imbedded in the panel positively define all elements of the images.

**Rear-Projection**—Because Digivue display/memory units are transparent they are ideally suited for rear-projection. You have drift-free registration between computer-generated displays and optically-projected images.

**Design Adaptability**—Digivue display/memory units are flat, not curved. As a result, information at the edges is just as sharp and accurate as in the center. And a Digivue display/memory unit is uncommonly slim—regardless of display area—allowing for a variety of installation possibilities . . . in desks, walls, drawers, consoles.

**Hard-Copy Potential**—The resolution of a Digivue display/memory panel allows for integration with standard office duplicating processes to produce page at a time hard-copy printouts of excellent quality.

Digivue display/memory units are available from Owens-Illinois in sizes ranging from 80 by 256 display lines at a resolution of 33 electrode lines per

inch to a 512 by 512 display lines panel with a resolution of 60 lines per inch and a display capability of up to 4000 characters. One of them just has to be right for your system.

Think what these Digivue display/memory units can do for time-sharing applications, management information systems, computer-aided instruction . . . and dozens more including airline reservations displays, aircraft cockpit displays, financial data terminals . . . in fact any display terminal for direct readout from digital computers or data systems.

**WHO IS OWENS-ILLINOIS?** O-I is a multi-product, multi-national manufacturing and marketing organization with 140 major facilities and sales in excess of \$1.5 billion a year. You may think of us as a packaging products company, but we also manufacture and market a diversified product line that includes everything from laboratory glassware to inertial guidance test systems for deep-space vehicles.

**AND WHY ARE WE MAKING DISPLAY UNITS?** As a natural extension of our already broad-based capabilities—in television bulbs, microelectronic products, ground glasses, new generation materials for technical, commercial and industrial use, and elements necessary for laser technology. We're committed to change, to the future, and to Digivue display/memory units.

If you and your organization are also committed to the future and to opening new and more effective communications systems, we'd like to hear from you. We'll send you technical data on Digivue display/memory units and a copy of our new full-color brochure.

Call or write: Jon Klotz, Marketing Manager, Electro/Optical Display Business Operations A, Owens-Illinois, Inc., P. O. Box 1035 Toledo, Ohio 43601 • (419) 242-6543.

# OWENS-ILLINOIS

Toledo, Ohio 43601



Circle Reader Service Card No. 1



# RAMTEK

THE DISPLAY COMPANY

is delivering

GRAPHIC DISPLAY  
SYSTEMS

with a difference

Solid State Memory

Raster Scan

Color

Grey Scale

Standard TV Display

Multi Character Size

End Point Vector Generation

Single and Multi Channel

## Ramtek Corp.

1000 Elwell Court  
Palo Alto, Calif. 94303  
415/964-6682

Volume 9 Number 2

March/April 1972

# Information Display

The Journal of Data Display Technology

## Table of Contents

### Articles

- A LOGIC CHARACTER GENERATOR FOR USE IN A CRT TEXT DISPLAY 9  
*P.A.V. Thomas and W.E. Mennie*  
Discusses the development of a general computer graphics facility capable of generating vectors and alphanumeric characters.
- USING INTERACTIVE GRAPHICS FOR FIGHTER PILOT TRAINING 15  
*Kevin J. Kinsella and Andrew J. Matthews*  
Describes implementation of a three dimensional graphical display system.
- INTEGRATED DISPLAYS FOR MULTICREW MILITARY AIRCRAFT 23  
*John Frost and Norman F. Sullivan*  
Outlines considerations involved in design for displays for military aircraft, and points up some problem areas common to airborne displays.

## Features and Departments

- EDITORIAL: A Unified Approach 6
- ID READOUT: Industry news 30
- NEW LITERATURE: Data available 32
- ID PRODUCTS: Innovations from many firms 33
- CORRESPONDENCE: Readers share their views 36
- ADVERTISERS 36

## The Cover

*Satellites orbiting the earth provide opportunities for seeing ourselves from undreamed-of vantage points — and for displaying space-gathered data to earth bound observers. Cover photo courtesy of TRW.*



# Have recent display advances left you behind?

No need to let this happen with the wealth  
of information now available in

## RECENT IN DISPLAY Vols. II



## ADVANCES MEDIA & III

The newest display advances are covered in these two fact-filled volumes that pick up where Volume I left off . . . and it sold out completely!

Now they're ready to mail, and they're filled with a wealth of up-date reports to help every engineer, systems designer and display user in selecting appropriate components and systems . . . and in comprehending new theories and techniques.

Authored by a number of top computer display experts, these all-new volumes represent the most pertinent, authoritative and up-to-date source of information on computer terminals; character line and curve generators; memory discs; digital printers and plotters; CRT's; over-all system considerations; and more. Contents include . . . VOL. II (260 pp.): *A Plasma Display Terminal* • *VTOL IFR Technology Program* • *A General Description of the Fallout Display System (FODS)* • *R&D in the Com-*

*puter and Information Sciences* • *Computer Processing for Display of 3-Dimensional Structures*. VOL. III (231 pp.): *The Impact of Electronic Displays on Aircraft Control* • *Digital Printer/Plotter Graphics Terminal* • *An Experimental Display Processor for the DX-1* • *Information Acquisition, Sensing and Input: A Selective Literature Review* • *R&D in the Computer and Information Sciences*.

With the wealth of information available here, you can keep ahead of the technology avalanche that threatens to bury many of today's engineers. *Recent Advances in Display Media, Vols. II & III* are available singly, or together at a special price.

And remember, business and professional books are tax deductible (authority: Treas. Reg. 1.162; I.R.C. 162), so act now and start making use of these valuable books to advance your company and your career!

## Ready NOW! at this special price!

**For a limited time only!**

**Vols. II & III, ordered together, only \$34.95**

Please send \_\_\_\_\_ copies of Recent Advances in Display Media, Vol. II

Please send \_\_\_\_\_ copies of Recent Advances in Display Media, Vol. III

Check, Cash or Money Order enclosed (amount) \_\_\_\_\_

Please Bill My Company in Advance (amount) \_\_\_\_\_

Company & P.O. Number \_\_\_\_\_

Name/Company \_\_\_\_\_

(California residents: add 5% sales tax)

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Date \_\_\_\_\_ Signature \_\_\_\_\_

Please make all checks or money orders payable to:  
TECHNOLOGY PUBLISHING CORP.

Complete satisfaction guaranteed! Immediate refund available on 10-day return privilege . . . we pay postage both ways.

Prices:

Vols. II & III together ..... \$34.95

One Copy (either) ..... \$20.00

Three or more copies ..... @ \$14.95

Eleven or more copies ..... @ \$10.00

Mail your payment, together with this coupon to:

TECHNOLOGY PUBLISHING CORP.

Dept. L-8

825 S. Barrington Avenue

Los Angeles, Calif. 90049

# Information Display

Published bimonthly by  
Information Display Publications, Inc.  
825 S. Barrington Ave. (213) 826-8388  
Los Angeles, Calif. 90049

*[Correspondence regarding feature articles, advertising, reprints and nonmembership subscriptions should be directed to the above address.]*

EDITORS & PUBLISHERS .. Martin Waldman  
Hal Spector  
EDITORIAL CHAIRMAN ..... R.L. Kuehn  
FEATURE EDITORS ..... T. Simkins  
C. Schmidt ..... M. Farley  
EDITORIAL COORDINATOR ... B. Atchison  
PRODUCTION MANAGER ..... C. Camburn  
CIRCULATION MANAGER .... P. Goldberg  
BUSINESS MANAGER ..... S. Graham  
ADVERTISING ..... Donald Meeker

**CLOSING DATES**—Editorial closing date is first of month preceding month of issue. Advertising closing is first of month preceding month of issue.

**CHANGE OF ADDRESS** notices should be sent promptly; provide old mailing label as well as new address; include ZIP code or postal code. Allow two months for change.

**SUBSCRIPTIONS** for U.S., its territories, possessions and Canada: \$20 per year; \$35 for two years; \$45 for three. Single copy price, \$4.00. Foreign countries: \$40 per year; \$70 for two years; \$90 for three years. Complaints concerning nonreceipt of magazines must be made within four months of issue mailing date.

**EDITORIAL CONTRIBUTIONS** must be accompanied by stamped return envelopes and will be handled with reasonable care; however, publishers assume no responsibility for safety of artwork, photographs or manuscripts. Every precaution is taken to ensure accuracy, but the publishers cannot accept responsibility for the correctness or accuracy of the information supplied herein or for any opinion expressed.

## Guide to Contributors

1. Copy is to be typed, double spaced, on white paper.
2. Number manuscript pages consecutively.
3. Arrange material in sequence: first cover page containing your name and title of paper, summary page next, followed by manuscript, and ending with reference page in which previously numbered references are identified.
4. Refer to graphs, diagrams, illustrations in text as Figure 1, Figure 2, etc. Identify material on back, and include your name.
5. Send recent "mug shot," wearing business suit with shirt and tie. Please write your name on back of picture.
6. Enclose recent and brief resume, listing educational background, job affiliations and titles, professional accomplishments, and professional/technical membership.

©1972 BY INFORMATION DISPLAY PUBLICATIONS, INC. ALL RIGHTS RESERVED. REPRODUCTION IN WHOLE OR PART WITHOUT WRITTEN PERMISSION IS PROHIBITED.

CONTROLLED CIRCULATION POSTAGE  
PAID AT LOS ANGELES, CALIFORNIA

## Editorial



## A Unified Approach

The interfaces between many technologies are frequently ill-defined, particularly when cross-disciplined fields are involved. Consequently, we may well ask whether or not display systems and certain classes of image systems require substantially identical engineering skills. Certainly, most image systems include some form of visual output or "display."

The question raised is not specious if one considers the number of engineering divisions and subdivisions now recognized in our technological base. Whenever additional fractionation can be avoided the entire technical community must benefit, to say nothing of the recipients of its output.

It may be a moot point whether a system is called "image" or "display." On the other hand, if the required technologies are for the most part the same, then it would be a disservice to develop separate terminology, standards and all the other accoutrements of a subfield. That such does happen is not necessarily a result of chauvinistic adherence to one's area of specialization, but rather, the communications difficulties which inevitably arise among different groups dedicated to their own causes and interests.

In this age of computers, the output of imaging sensors — even of the photographic variety — is being increasingly processed and displayed using techniques that are fundamentally like those that have evolved in computer-based display systems. Analytic evaluation of systems producing images, from whatever source, is a process that has been highly refined. The tools which are required to specify, design, produce and test systems primarily concerned with image data are available. It remains for us to recognize that sufficient commonality is present in those systems which handle images that a unified engineering approach is not only possible, but highly desirable.

R.L. Kuehn



# '72 sjcc brings it all together...

Starting with the Keynote by IBM Chairman T. Vincent Learson, the '72 SJCC brings it all together in Atlantic City, May 16-18.

The technical program at this year's Spring Joint Computer Conference is one of the most extensive ever—37 sessions will provide a comprehensive review of our developing technology with forecasts for the 1970's. On the exhibit floor you'll find the latest developments in hardware, software, systems and services waiting your

inspection. Add featured addresses by Keith Uncapher, AFIPS' President, and Dr. Andrei Ershov, leading Soviet computer scientist, and you begin to see the total picture.

Plan now to obtain a unique overview of changing technology and industry trends at '72 SJCC. Take advantage of the chance to exchange ideas and discuss mutual problems with an outstanding array of industry leaders, colleagues, customers and suppliers.

It's easier than ever before to put yourself in the picture. New one-day registrations for the technical program and exhibits are available in addition to full conference registration.

Act now to receive complete information including housing and pre-registration forms. The '72 SJCC is an opportunity you can't afford to miss. And if you pre-register for the full conference prior to April 28, you'll receive a discount on your registration fee.

## get the facts

Act now to receive full information on the 1972 SJCC.  
Clip this coupon and mail today to:

**afips** 210 Summit Ave., Montvale, New Jersey 07645.

- ☐ I am interested in attending—send details and registration forms.
- ☐ My company is interested in exhibiting at '72 SJCC—please send necessary information.

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_



## Meet RCA's new family of silicon target storage tubes—sister products of the SIT camera tube used on the moon

Here's the new storage tube line — with performance levels enhanced by a silicon target — you've been waiting for. Designed for a wide variety of TV display applications, these devices are extensions of the silicon technology used in the Apollo 15 camera tube.

RCA-C22041 is typical of this family of single-ended, non-destructive readout storage tubes with silicon target. Use it and the companion tubes in such diverse applications as frame freeze, low-light-level TV signal enhancement, information storage and retrieval, picture transmission over

phone lines, specialized graphic display terminals, and buffer memories for document retrieval systems.

Designed to operate over a wide range of input and output rates in a variety of operating modes, the RCA family of silicon target storage tubes includes:

Type	Dia. Inches	Resolution Lines	Deflection Method	Reading Duration Mins.
C22041	1	1200	M	5
C22045	1½	1700	M	10
C22047	1	1200	M	10

For consistent high quality and reliability in your display systems, look into RCA's new silicon target storage

tube line. For more information, see your RCA Representative. For technical data on type C22041, write: RCA, Commercial Engineering, Section 86C /ZD1, Harrison, N.J. 07029. International: RCA, 2-4 rue du Lièvre, 1227 Geneva, Switzerland, or Sunbury-on-Thames, U.K., or P. O. Box 112, Hong Kong.

**RCA** Electro Optics



# A Logic Character Generator for Use in a CRT Text Display

P.A.V. THOMAS and W.E. MENNIE

## Abstract

As part of a general graphics facility currently being developed around a DEC PDP 8/S, this character generator uses only standard logic modules to produce the necessary brightening pulses for a 5 X 7 dot matrix presentation. The matrix raster itself is generated by means of counter-registers and D/A converters which facilitates the generation of three sizes of characters, provision for subscripting and superscripting, carriage return to the left hand side or a user set margin, and line feed with single or double spacing. The 60 ASCII character set is available and an extended character set could be generated by an extension of the same principles.

## Introduction

During recent years it was decided to develop a general computer graphics facility about an existing DEC PDP 8/S which would be capable of generating vectors and alphanumeric characters. This paper is concerned only with that portion of the system involved in the character generation and some possible alternatives are included at the end.

## Basic Method of Character Generation

The basic method used is the well known 5 X 7 dot matrix presentation on the screen of a CRT as indicated in Figure 1.

Different methods have been used in the past to produce the necessary brightening pulses applied in synchronism with suitable vertical and horizontal deflections of the beam. In the particular case the entire generation is produced using logic gates in conjunction with counter-registers. For convenience of reference let us assume that the dots are generated time sequentially in the order indicated in Figure 2 so that it now becomes apparent that to produce the letter "A" of Figure 1, it is necessary to generate brightening pulses at relative dot times, 1, 2, 3, 4, 5, 10, 13, 17, 21, 24, 27, 29, 30, 31, 32, 33. These brightening pulses are obtained by applying the pulse train of Figure 3(c) to the CRT brightness modulator in

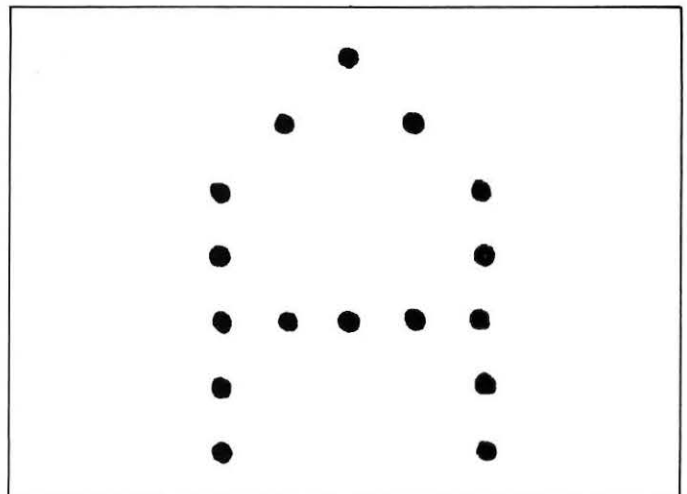


Figure 1: Dot generation of letter "A."

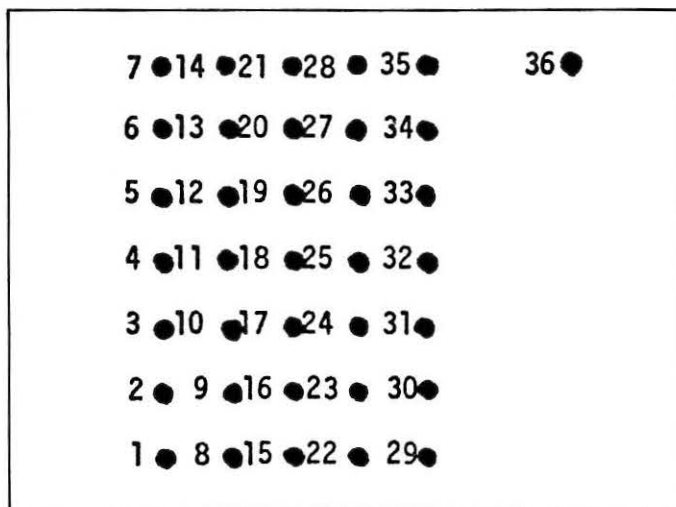


Figure 2: Basic dot matrix.

synchronism with the X and Y staircase deflections shown in Figure 3(a) and (b). These staircase wave-forms are conveniently generated by means of X and Y counter-registers feeding D/A converters as described later.

The basic brightening pulse generator is shown in the block diagram of Figure 4. When a character code is loaded into the Buffer Register, a Clock oscillator is initiated whose output feeds a Dot Counter counting up to 36 (the total number of matrix points plus one used for character spacing). The outputs of this counter together with a delayed clock pulse to give the counter time to settle down, are fed into the Dot Decoder

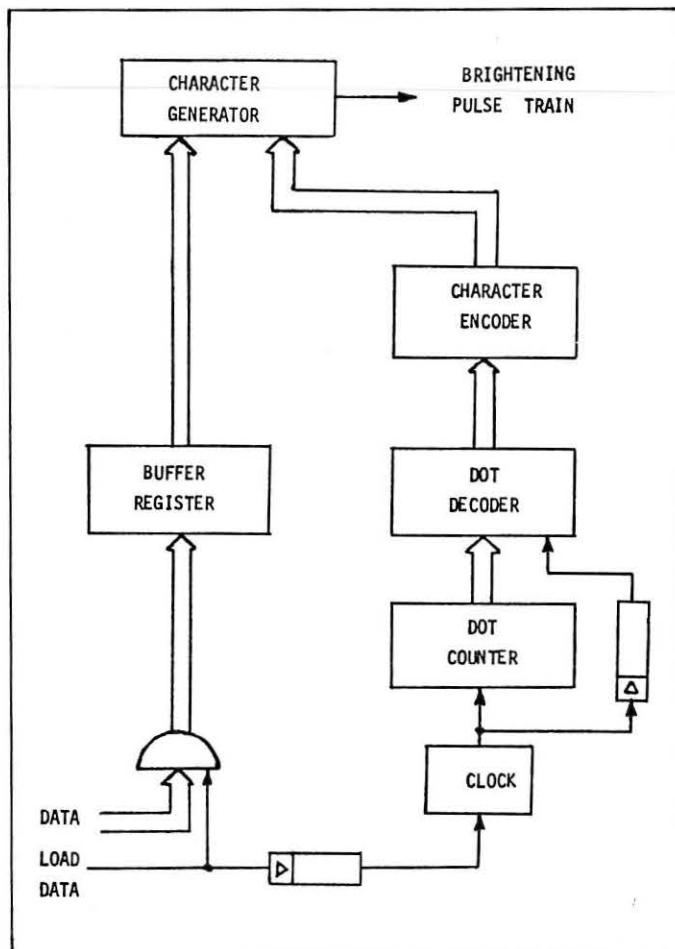


Figure 4: Block diagram of basic character generator.

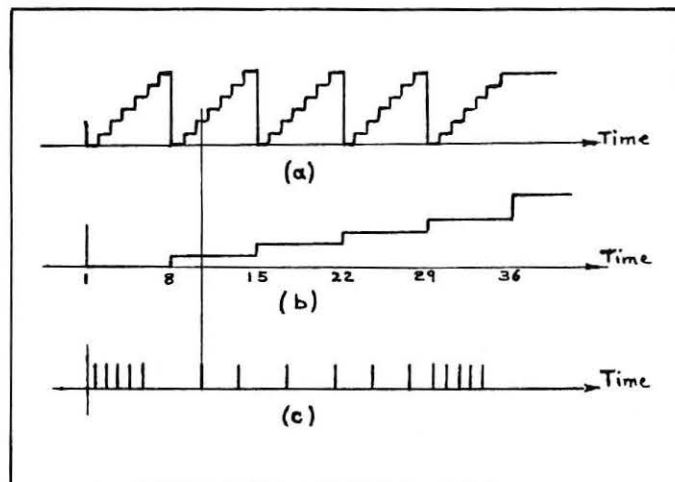


Figure 3: Wave-forms to generate the letter "A": (a) Y-deflection; (b) X-deflection; (c) brightening pulse train.

consisting of a set of 35 AND-gates generating the 35 discrete dot time pulses (1 to 35) as shown in Figure 5. To generate the pulse train for a particular character, it is now necessary to select and combine the required pulses into a single output; this is achieved by the Character Encoder consisting of a series of OR-gates (one for each different character to be generated) as shown in Figure 6. The final section is the Character Selector which decodes the 6-bit stripped ASCII character in the 6-bit Buffer Register and gates the corresponding Character Pulse Train to the CRT brightness modulator; a simplification is achieved here by combining the Character Pulse Train AND-

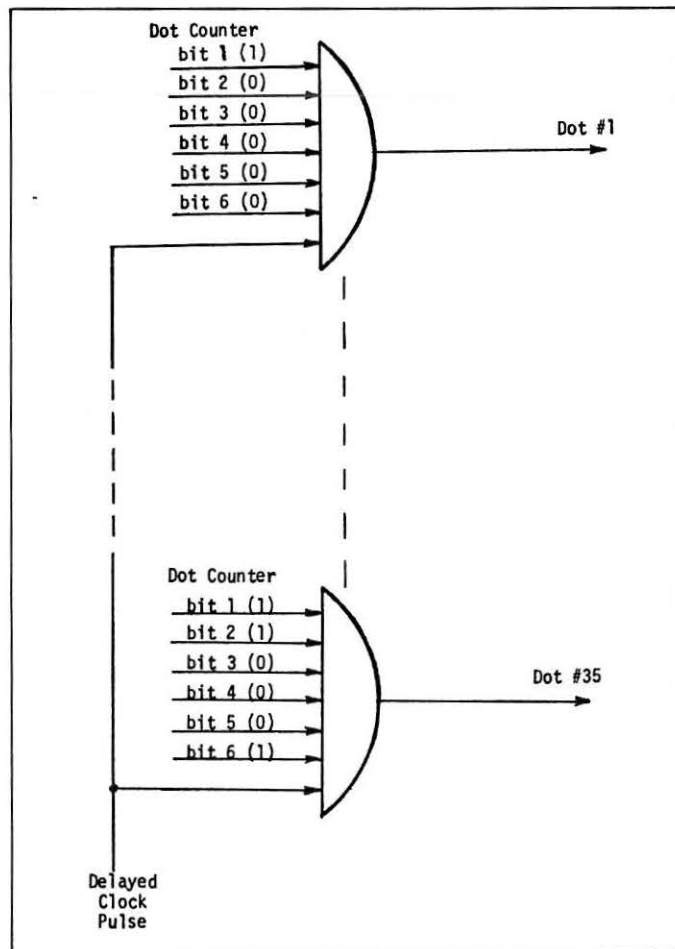


Figure 5: Dot decoder.



gate and decoder AND-gate into one gate as shown in Figure 7 which also shows the final OR-gate which permits any selected pulse train to be fed to the CRT. Thus the entire logic is a succession of AND-OR logic which is easily implemented with standard NAND (or NOR) logic modules.

Reverting back now to the X- and Y-deflections, these are conveniently produced by using two counter-registers with DAC's as shown in Figure 8. The initial value of the X- and Y-registers must locate the 1st dot position and to achieve this we have the Y-value set equal to XXXXX000 and the X-value equal to Zero, where XXXXX may be any binary number. The clock (used to generate the character brightening pulse train) now counts in the Y-direction using the Y-register until the count of 7 is reached, at which time the Y-value is reset to the previous value of XXXXX000 and the X-value is incremented by unity. This is continued by resetting Y and incrementing X at count times 14, 21 and 28 to complete the character matrix deflections at count 35. If now a second character were to be loaded it would commence with dot No. 1 lying on top of No. 29 of the previous character. To avoid this, at the end of the previous character, a space of two dots is generated at an additional pulse time No. 36 (indicated on Figure 2) by incrementing the X-register in the 2's position.

### Modification to the Basic Generation

So far nothing has been said concerning the scale factor or size of characters. Naturally the size of a character will depend

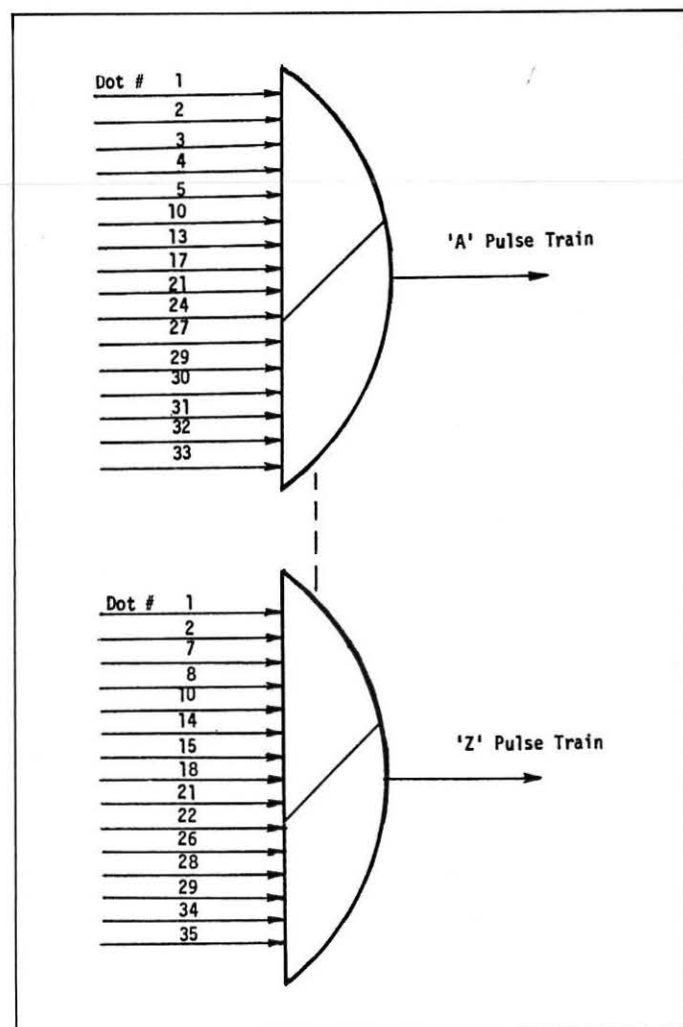


Figure 6: Character encoder.

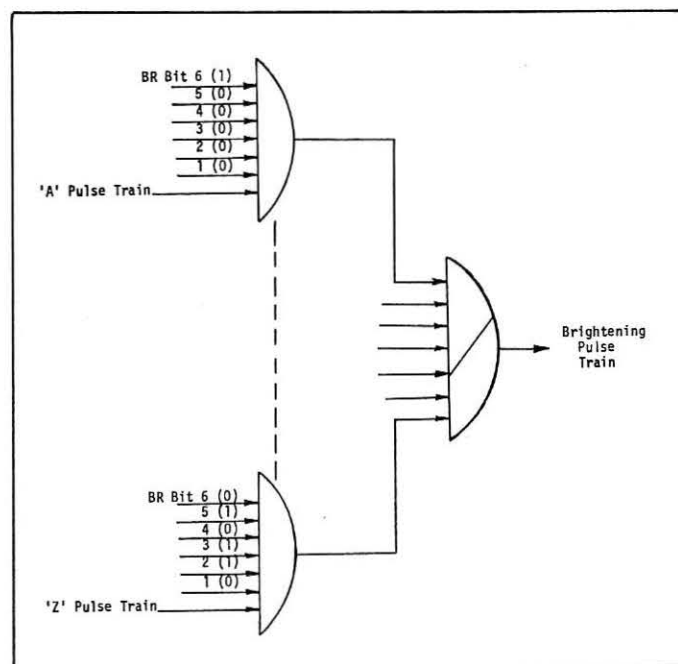


Figure 7: Character selector.

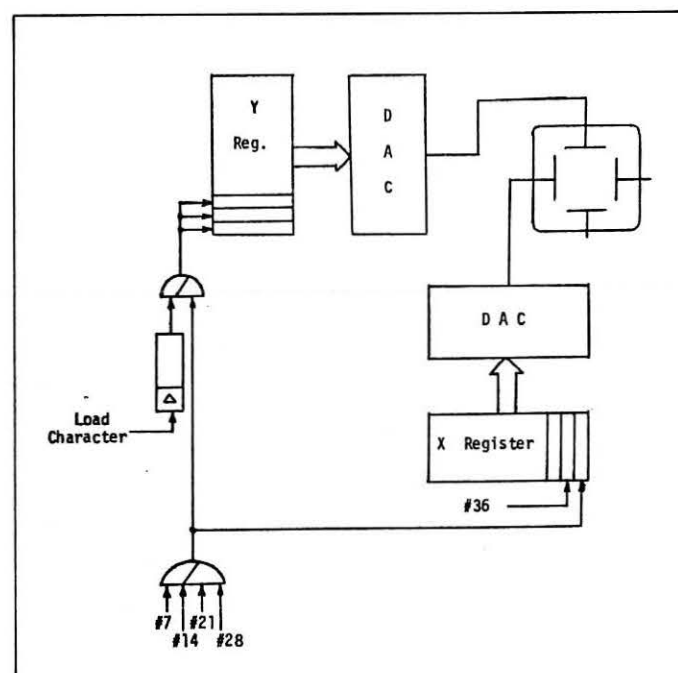


Figure 8: Staircase generators.

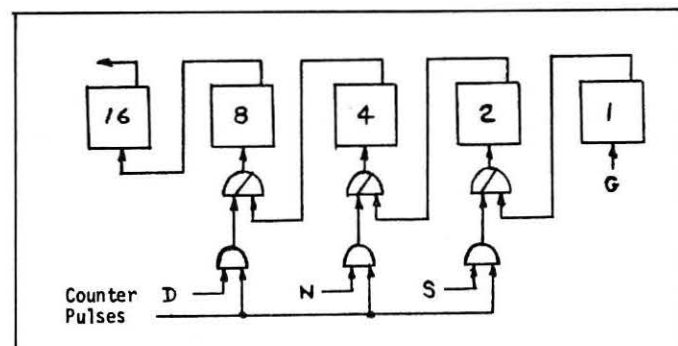


Figure 9: Scaling.

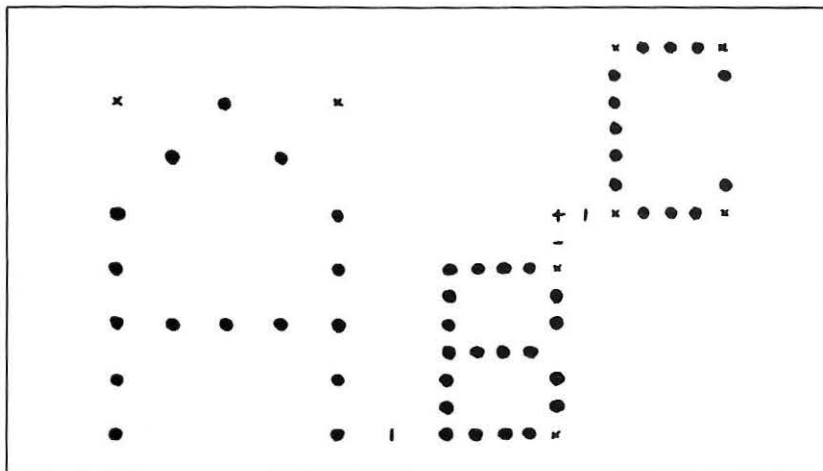


Figure 10: Scripting.

on the raster unit of the display terminal. In the particular case the overall design is based on a screen display area of 1024 X 1024 raster units, which is considered reasonable for a text facility. If each character generation step on the X and Y counter-registers was only 1 raster unit, this would result in a character size of only 5 X 7 units or approximately 1/16 in. high on a 10 in. square display which is impractically small. If, however, counting is carried out at the 2's input of the counters the size is doubled giving a character of about 1/8 in. height and about 85 characters/line, considered to be a reasonable minimum. By further changing the position of the counter inputs to the 4- or 8-input points, shown schematically in Figure 9, the size may be doubled or quadrupled (up to approximately 1/2 in. high) giving any one of 3 sizes, for convenience referred to as small, normal or double size. Figures 10 A and B show the basic matrices for two adjacent sizes from which it can be seen that A may be used as a capital for the B size or B may be considered as a subscript for the A size. If now the position of B is moved up to that shown at C then the character generated may be used as a superscript or as a mathematical exponent to the character at A. In fact, the logic required to accomplish this is relatively trivial — the only requirement being to preset the next higher Y-counter bit to '1' prior to the character generation so that the dot count becomes effectively 8, 9, 10, 11, 12, 13, 14 rather than 0, 1, 2, 3, 4, 5, 6 in each vertical count. Furthermore it will be observed that the C character is automatically spaced two dot positions above the top of the subscript B so that one such character might be placed above the other rather than to its right, as shown in Figure 11. This is achieved by means of a non-printing "back-space" character.

## Special Characters

This naturally leads to a number of special non-printing characters that are provided and greatly assist the user of the textural display, viz, Back-space (BS), Carriage Return (CR), Line Feed (LF) and Tabulate (TAB). Before considering these characters, however, we have to realize that there is one complication, namely, duplication of 6-bit stripped codes; for example the 6-bit codes for BS and the letter X are both 011000 ( $30_8$ ); however if we consider the 7-bit codes for these two characters, they are 0011000 ( $30_8$ ) and 1011000 ( $130_8$ ) respectively. Thus, if we load the 7-bit code into an extended Buffer Register (of Figure 4) of 7-bits then the normal characters need still use only the six least significant bits, the 7th bit only being used to detect the special characters and take the

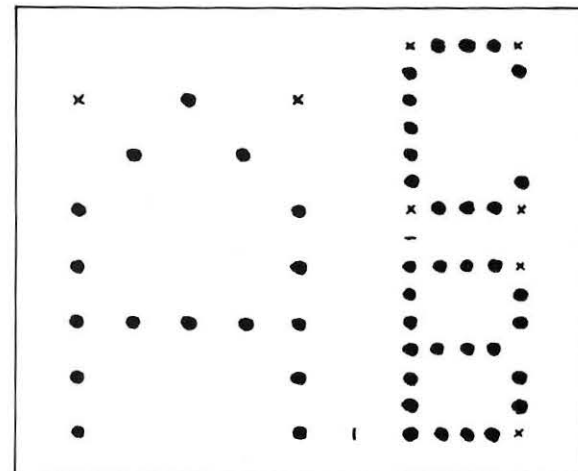


Figure 11: Scripting with back space.

necessary action. As these characters are all non-printing (non-displayed) and their corresponding normal characters will be generated the brightness modulation must be inhibited. Considering first the Back-space; when this code is detected the only requirement is that the X-counter is made to count down instead of up while a blanked out "X" is generated; the net result is that the final position (dot No. 36) now corresponds to the previous dot No. 36 so that the next normal character generated is spaced back one character position. If this next character were to be a superscript then the result would be as shown in Figure 11. Note that this also enables the operator to generate special printing characters by super-imposition of standard characters, if this is desired. The other three non-printing characters, the Carriage Return (CR), Line Feed (LF)



and Tabulate (TAB) will be considered together as there is a similarity in their mode of operation, that is, they involve a similar type of change in the contents of their respective registers and also make use of a special Margin Register. Under normal conditions, the CR causes the X-counter to be reset to zero so that the next character is generated at the left hand edge of the display area. Similarly the LF causes the Y-counter to be decremented by two character heights (16 dot positions) to move to a new line, leaving a one character-height space in between lines. A further extension of these two non-printing characters is made available to the user by the use of a "margin bit," M, in the data word of the display file shown in Figure 12. Specifically, consider the CR function with this bit set to '1'; in this case the return, instead of being made to the left hand edge of the display area, is made to a position corresponding to a multiple of 10 small characters from the left hand edge, the exact multiple being dependent on the content of a 3-bit Margin Register. The choice of 10 small characters per margin position was based arbitrarily on the fact that there are 85 small characters/line and 8 was a convenient number of margin positions (a 3-bit register being able to contain 8 different values). By analyzing the required contents of the X-register for each of the values of the margin register, as shown in Figure 13, it is easily established that the following rules must be applied:

Bits 1, 2, 4, = Zero  
 Bit 8 = MR1  
 Bit 26 = MR2  
 Bit 32 = MR3  
 Bit 64 = One  
 Bit 128 = MR1  
 Bit 256 = MR2  
 Bit 512 = MR3

where MR1, MR2 and MR3 are the margin register bits of weight 1, 2, and 4 respectively.

The above is easily implemented by clearing the X-register, loading the bits, as indicated above, from the margin register and setting bit 64 to '1.'

The other similar non-printing character, Tabulate, which uses the same positions poses a more difficult problem as the tabulation requires a different incrementation of the X-counter to a particular tabulation position from any one of the 10 small character positions (120 raster units) at which the last character was placed. One method would be to read the contents of the X-register into the computer, determine the next tabulate position and load this value back into the X-register. However, this would be too slow and a hardware algorithm was developed to correctly generate the necessary stepping in one character generation cycle.<sup>1</sup>

A number of algorithms were tried with varying success and the one ultimately used is similar to that used for the Margin Return in that the appropriate binary value in the X-register must be one of those in the table above. Thus if we can determine the 3 most significant bits, the remaining bits may be set in the same manner as the Margin Return, using these 3 bits in place of the contents of MR1, MR2 and MR3.

Recalling that the smallest character is 12 raster units wide means that we can ignore the 4, 2 and 1 bits as their sum is always less than 12. However, the algorithm shown in Figure 14 was developed which incorporates two gates which detect three cases where the general algorithm fails and makes the

DECIMAL	OCTAL	BINARY VALUE										MARGIN REGISTER CONTENTS
VALUE	VALUE	512	256	128	64	32	16	8	4	2	1	
0	000	0	0	0	0	0	0	0	0	0	0	N/A
120	170	0	0	0	1	1	1	1	0	0	0	0
240	360	0	0	1	1	1	1	0	0	0	0	1
360	550	0	1	0	1	1	0	1	0	0	0	2
480	740	0	1	1	1	1	0	0	0	0	0	3
600	1130	1	0	0	1	0	1	1	0	0	0	4
720	1320	1	0	1	1	0	1	0	0	0	0	5
840	1510	1	1	0	1	0	0	1	0	0	0	6
960	1700	1	1	1	1	0	0	0	0	0	0	7

Figure 13: Tabulate and margin positions.

necessary corrections. The logic circuit required to place the correct values in the 512, 156, 128 and 64 bit positions by means of counting in the 64 bit position is shown in Figure 15. Having set these four bits correctly, the remaining bits are set in exactly the same manner as in the Margin Return and in fact use essentially the same circuitry.

If the margin bit is set to '1' in an LF data word the next line is placed immediately under the previous line without leaving a character height space between lines. Thus by changing this bit, the user has the facility of single or double spacing of lines of text.

In the previous paragraphs reference was made to the Margin Register without stating how this was set. In the display file of data to be displayed, prior to this data there will be a Mode Control Instruction also shown in Figure 12 which has

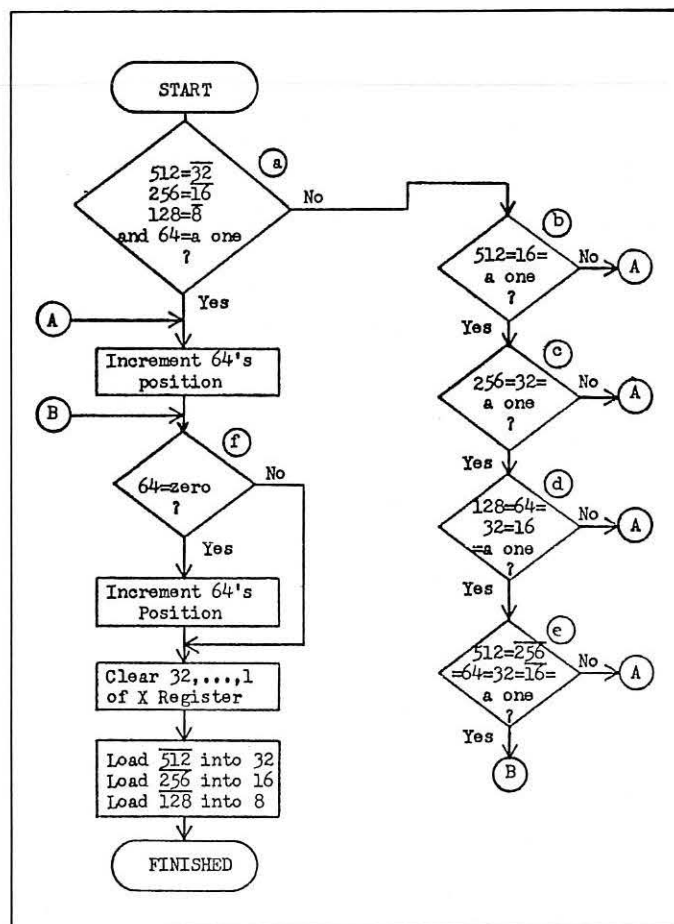


Figure 14: Tabulate algorithm.

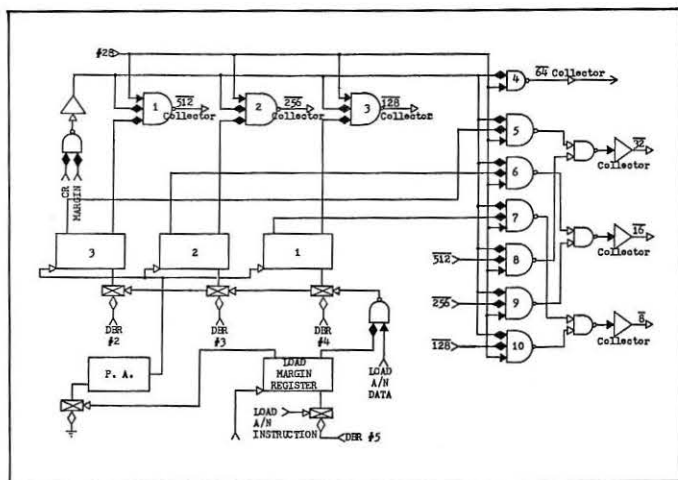


Figure 15: Circuitry for loading X register during carriage return and tabulate.

one bit Ma which when set to '1' takes the content of bits 2, 3, and 4 of the next word (data) and loads it into the margin register; from then on all margin returns are to this same margin until its content is changed by another Mode Control Instruction having Ma = 1. So that this item of data is not displayed the corresponding 7-bit ASCII code portion of the data is set to zero (Null Character) which causes no character

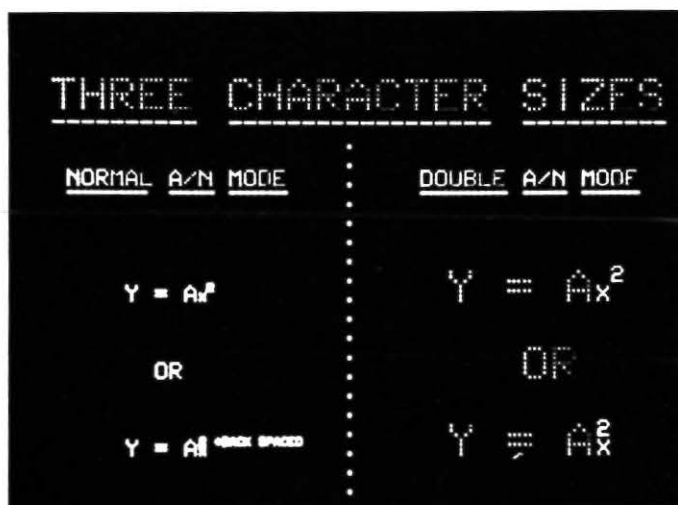


Figure 16 (a): Character sizes.

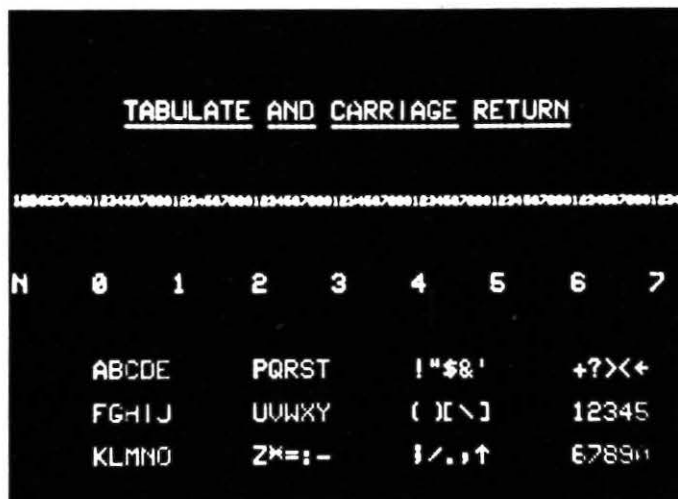


Figure 16 (b): Tabulation.

generation to take place by inhibiting the counting in the X-register.

No special pointer character is provided but one is easily generated by using a standard character, such as a minus sign (-), as a "superscript" on the next single spaced line.

### Display Control

The entire system is intended to be operated in an interactive mode so that a non-storage CRT is used. As the hardware is capable of generating characters at a rate of about 53,000 characters/second it could be directly driven from a fast I/O computer but with a PDP 8/S, due to its upper transfer rate of about 4,500 characters/second, the amount of information that could be displayed would be limited. For this reason a separate buffer memory has been developed but is not described here. However, some typical results, to show the capability of the display generator, are given in Figure 16. Figure 16(a) shows essentially the 3 character sizes and the subscripting and superscripting capability (with and without backspacing the latter). Figure 16(b) shows the tabulate and margin return facilities, the numbers 0 to 7 being located by tabulation and the four columns of characters below being formed using 4 different margin settings. These four columns also illustrate the 60 possible printing characters available.

### Further Possible Modifications

As described, the above hardware is part of a general graphics facility and if only textual display was required the Instruction and Data Words could be combined as shown in Figure 12. By the addition of more NAND (or NOR) modules a full 128 character set could be easily implemented; and by increasing the number of bits representing a character more characters could be generated. The main problem then is intelligent representation of the characters and it would become necessary to change to a 7 X 9 dot matrix rather than the existing 5 X 7; this however should not pose any serious problems.

### Conclusions

The authors claim to have developed a completely logic hardware alphanumeric character generator with some novel features that assist in manipulation of text. Although the complete logic and registers require approximately 215 modules, it provides flexibility for the generation of other printing characters very conveniently and also is relatively easy to service due to the nature of the logic design. Furthermore, if desired, it should not be difficult to considerably reduce the physical size if LSI techniques were applied.

### Acknowledgement

The authors wish to thank the National Research Council of Canada for financial assistance to this project.

### Reference

1. W.E. Mennie, "An Alphanumeric Text Generator for a Computer Display," M.A.Sc. Thesis, University of Windsor, 1970.

P.A.V. Thomas, Ph.D., is affiliated with the University of Windsor, Ontario, Canada, and W.E. Mennie is with Control Data Canada Ltd., Rexdale, Ontario.



# Using Interactive Graphics for Fighter Pilot Training

KEVIN J. KINSELLA and ANDREW J. MATTHEWS

## Abstract

The use of interactive computer graphics promises to revolutionize the military's system of training fighter pilots for combat and save millions of tax dollars at the same time. The Navy has recently contracted with Cubic Corporation of San Diego to provide a new all-electronic system, called the Air Combat Maneuvering Range (ACMR). Adage Inc. in Boston is subcontracted to provide the display facilities which include a "three-dimensional," real-time CRT display of air combat maneuvers and accompanying dynamic data on interactive graphics terminals. The display system accepts a three-dimensional image description, in this case the maneuvering range and aircraft within it, and displays it as a precise drawing from any viewing orientation, scale and

position. The perception of dimensionality is aided by intensity depth cuing and aircraft scaling; and aircraft closer to the observer, at any viewing orientation, is brighter and larger than one further away. The display will permit an air-combat instructor on the ground to view tactical dog-fights with simulated missile firings from almost any vantage point by a flick of his wrist; will cut down the hardware expense of practice missile firings at drone targets; will give the pilot much more missile-firing practice through simulation and will immensely aid flight-test range safety officers in their efforts to identify and repair aircraft which have suffered damage as the result of undue strain. This paper describes the implementation of the real-time graphical display system developed by Adage.

## Introduction

At present, tactical fighter pilots take to the air in pairs with the instructor following in a chase plane. Maneuvers are carried out — simulated dog fights, etc. — while the instructor follows the action making a running commentary to either pilot and/or retaining in memory the sequence of events for a later debriefing on the ground. The limitations of such a method are obvious: (1) The airborne instructor has only one vantage point to view the action from, plus being occupied with piloting his own craft; (2) In a fast-changing, complex situation such as an aerial dog fight, instructors should not be burdened with remembering entire action sequences; (3) The

feedback to the trainee pilot is delayed and he obviously cannot view himself in action; (4) Actual missile firings cannot occur in this dog fight enactment, and when missiles are fired at drones, the procedure is extremely costly and unrealistic since drones are incapable of realistic aerial maneuvers — much as a duck hunter sneaking up on a wooden decoy is far removed from taking aim at a fast-moving mallard.

With the ACMR system, a number of improvements will result: (1) The instructor need only sit at the CRT console (see Figure 1) observing the air action from a wide range of rotational angles or even cause the display to register the pilot's cockpit view. (2) Afterwards, for the debriefing, the instructor can rerun the entire sequence giving pointers as he proceeds,



Figure 1: Photograph of observer at the AGT/150 "3-D" console observing the ACMR.

and better yet, each trainee can see his own action from the instructor's viewpoint (much like athletes view the films of their games) — an immensely helpful link in the educational process. (3) The system, in one operating mode, will transmit radio tones to the trainee pilot when he is in effective cannon/missile firing position, so he will learn directly from this Pavlovian experience what these relative positions are. (4) The ACMR provides the facilities to test pilots' missile firing abilities a much greater number of times than at present. Currently, each Navy pilot is rated annually on the basis of only two missile firings. There is also a potential major saving from avoidance of air combat accidents — mid-air collisions and aircraft going out of control — since the instructor will monitor aircraft position and altitude and notify pilots of impending hazards.

### ACMR System Description

The ACMR system (see Figure 2) consists of four major subsystems:

1. An Airborne Instrumentation Subsystem (AIS) carried on each plane on the combat range which monitors aircraft performance parameters and weapons data and telemeters these to the ground.
2. A Tracking Instrumentation Subsystem (TIS) consisting of remote unmanned stations covering the range area and tied to a master station. This network very accurately

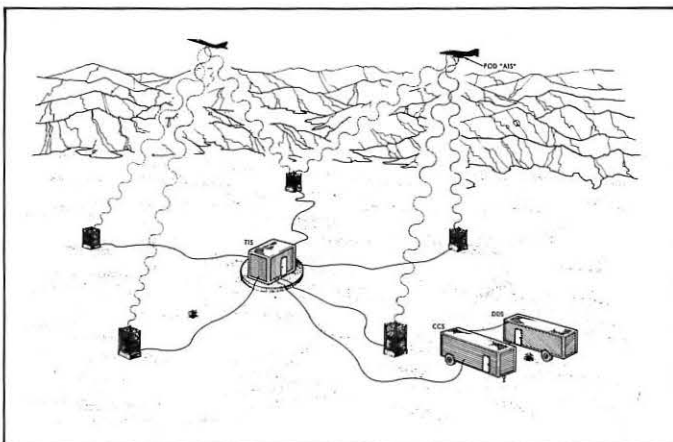


Figure 2: Diagram of ACMR system.

ly measures the distance to the aircraft, and communicates with the airborne system and the computation system.

3. A Control and Computation Subsystem (CCS) to receive the incoming data and prepare these for display. The CCS also monitors the system operation and performs missile trajectory simulations.
4. A Display and Debriefing Subsystem (DDS) which displays the range situation graphically and in alphanumeric on three CRT's and is used as a training aid for range control, and to replay previously recorded flight exercises. It is this system that is the subject of this paper.

### The Display and Debriefing Subsystem

The DDS (see Figures 3a and 3b) consists of two identical consoles, each of which has three separate CRT displays (see Figures 4a and 4b): 1) a storage tube summary display of static text messages; 2) a dynamic alphanumeric and a 2-D

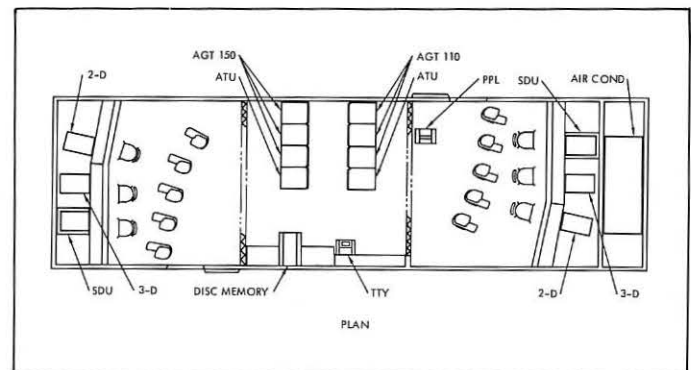


Figure 3a: Top view of the DDS van.

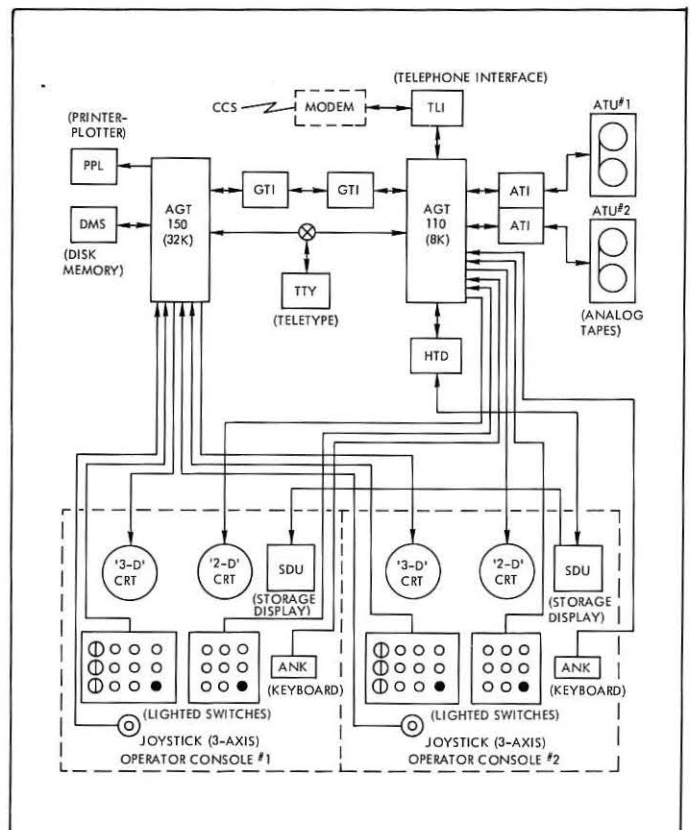


Figure 3b: Diagram of the DDS van hardware configuration.



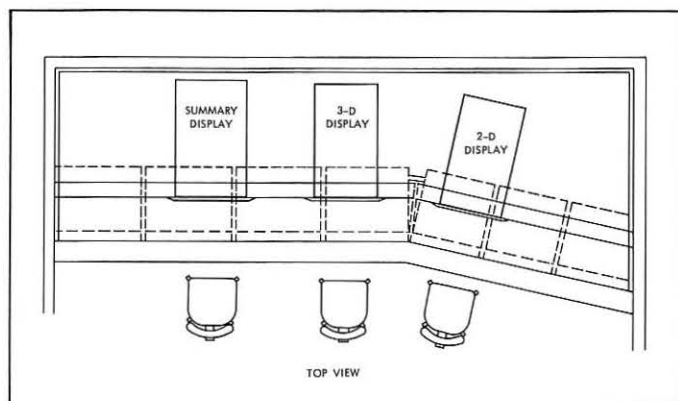


Figure 4a: Top view of a DDS console.

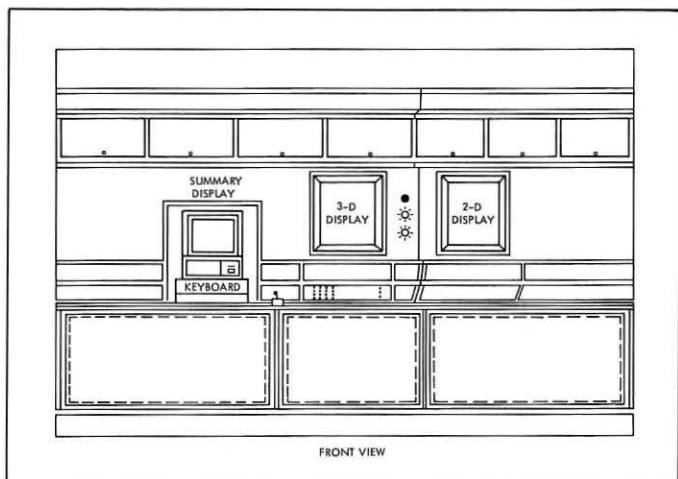


Figure 4b: Plan view of a DDS console.

graphic display of critical aircraft parameters; 3) a realistic dynamic display of the 3-D combat range air-space.

During actual training exercises, the first console would be occupied by an instructor pilot monitoring the 3-D range display, a range safety officer monitoring the alphanumeric display and a system operator at the controls of the storage tube. The personnel at this console control are responsible for the safety of the air combat maneuvering range.

The second console for the DDS is functionally identical to the first, but will appear to the user as entirely independent. Normally this console is used to replay previously recorded exercise tapes, although the tasks for the consoles can be reversed. The replay operation and its display is identical to the live display with the additional facility of freezing the action, backing up the tape and the ability to produce hard-copy of any of the displays including the 3-D range display.

Every 100 ms, the Control and Computation System transmits to the DDS the position and orientation information for each of up to four maneuvering aircraft, a position update on one of the 12 additional support aircraft and extensive additional information about the maneuvering aircraft (closing angles, hazard conditions, etc.). At the DDS, these incoming data messages and the voice communication channels to and from the airborne pilots are simultaneously recorded on one magnetic tape (voice in analog form; data in digital). The displays are generated from the data almost instantaneously.

#### Status Display

The Status Display is a storage tube unit to provide the observer with static information such as pilot name, aircraft

types, exercise name, range status, hazards, pilot performance errors and evaluation of missile firing results (hit or miss, and why). Some displays are automatically presented, others are optionally available by depressing a control push button.

#### Alphanumeric Display

The alphanumeric display (see Figure 5) is a dynamic display of the altitude, g-force, angle of attack, and true air speed, for each of up to four maneuvering aircraft. "Thermometer" displays were chosen, rather than alphanumerics, because this type of analog presentation conveys the overall situation to the observer most rapidly, and as it is updated every 100 ms, it also gives the observer an accurate impression of the rate of change of these important aircraft parameters. The observer can display the exact alphanumeric values by holding down a push button. When hazardous conditions are detected by the system, the appropriate indicator blinks and the alphanumeric value is added to the display. Serious hazards and range degradation conditions are indicated by warning lights and buzzers.

By monitoring these displayed data, an instructor can, for example, warn a pilot to bottom out of a dive before his altitude is so low that a fast climb would put undue stress on an aircraft or worse, before his altitude dips below the minimal altitude required for a climb out a steep dive. To alert the instructor, warning lights can be triggered at any parameter value up to the maximum for the plane; thus a trainee would initially have very "safe" hazard parameters. Similarly, the range safety officer will watch the g-force level on the aircraft to insure that if it exceeds its maximum allowable limit, the plane may be examined for possible structural damage before its next flight. Thus, pilots who try to push their aircraft to the limits of endurance, will be restrained from doing so.

#### The 3-D Range Display

The three-dimensional range display (see Figures 6a, b and

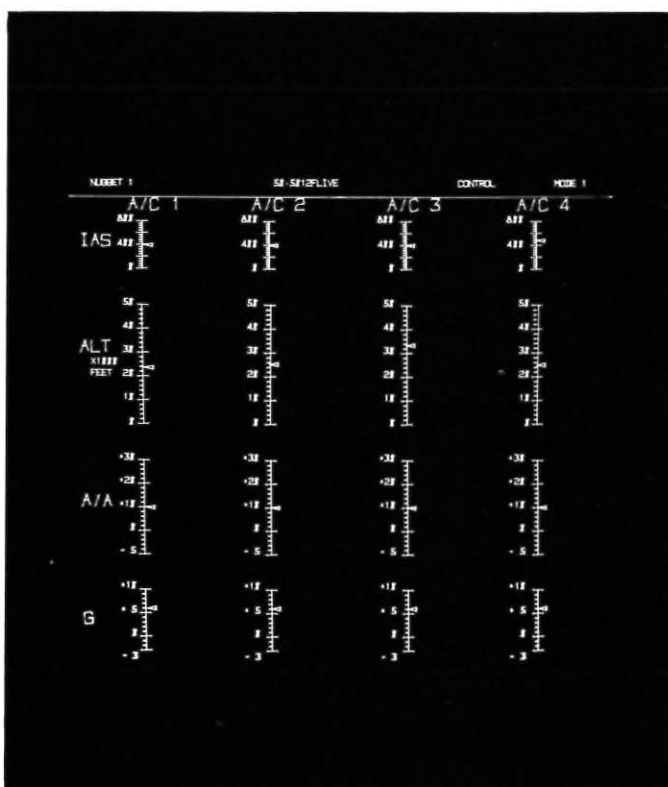


Figure 5: Photograph of the AGT/110 alphanumeric display.

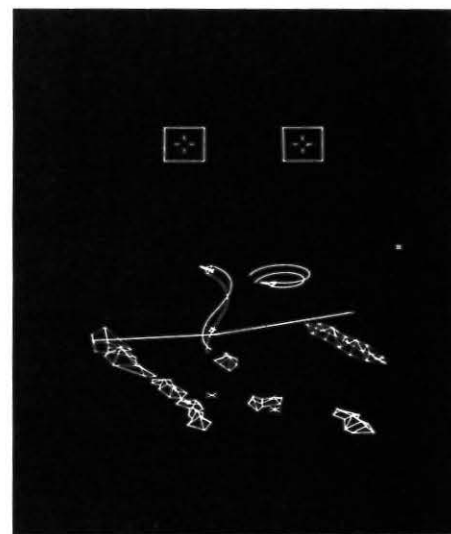
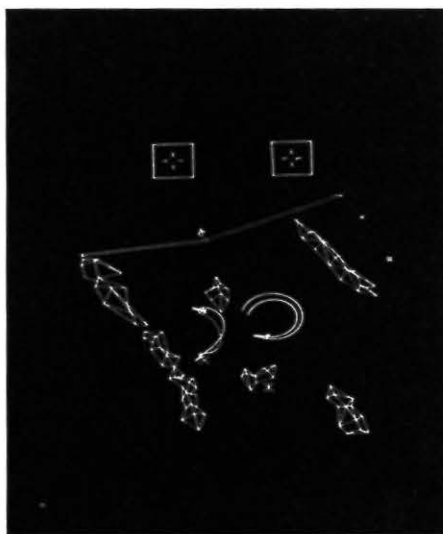
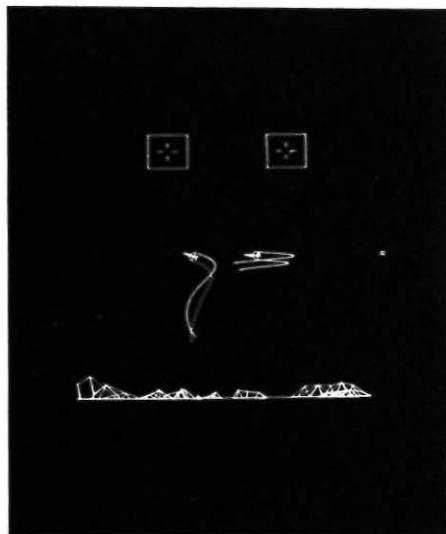


Figure 6a, b, c: Sequential photographs of a rotation of the AGT/150 "3-D" display.

c) presents a realistic picture of the activity in the ACMR airspace. The ground terrain shows the major geographic features recognizable by airborne pilots over the forty mile square range. The true ground position of each maneuvering aircraft is indicated by a small cross on the ground. The maneuvering aircraft are represented as accurate drawings of the specific aircraft model that each represents. These aircraft are identified by a numeric label which accompanies the plane on the CRT. When hazard conditions are detected, a flashing label of the hazard and the pilot's name also accompany the aircraft. Attempted missile firings detected by the airborne equipment trigger a simulation in the CCS so that a trajectory for the missile and hit/miss information is generated which is also displayed on the CRT.

### 3-D Hardware Capability

The three-dimensional display hardware is an Adage Graphics Terminal Model 150 (AGT/150). In the AGT/150 system, picture items which are represented by lists of coordinates in core are not routinely translated into a display list for each refresh frame. Instead, the absolute coordinates are passed through the coordinate transformation hardware to create the analog output values for the vector generator driving the CRT. Figure 7a illustrates the display of an absolute coordinate list of an aircraft, and in 7b, the same coordinate list after three rotations have been composed into the coordinate transformation array. The following equations would describe this type of transformation:

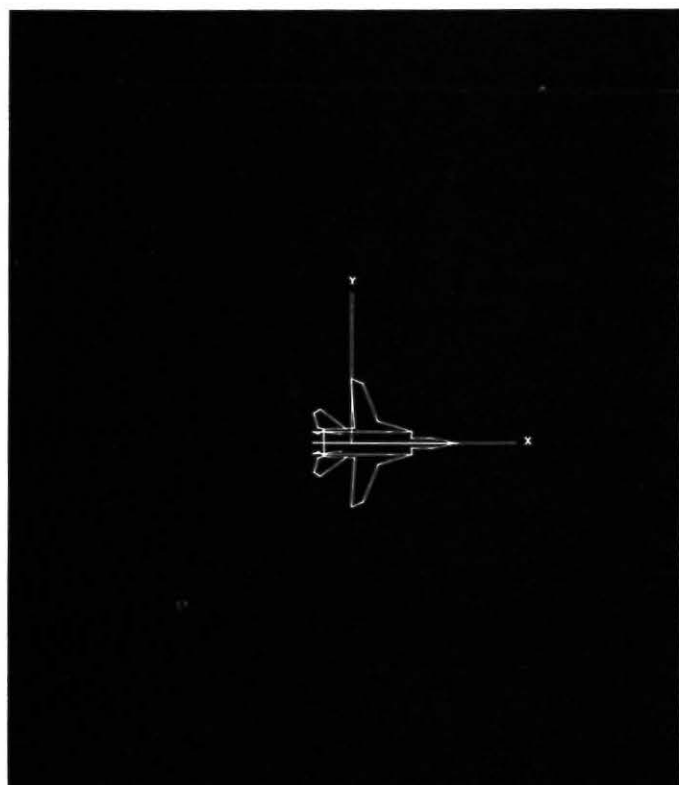


Figure 7a: AGT/150 display of the absolute coordinate list of an aircraft.

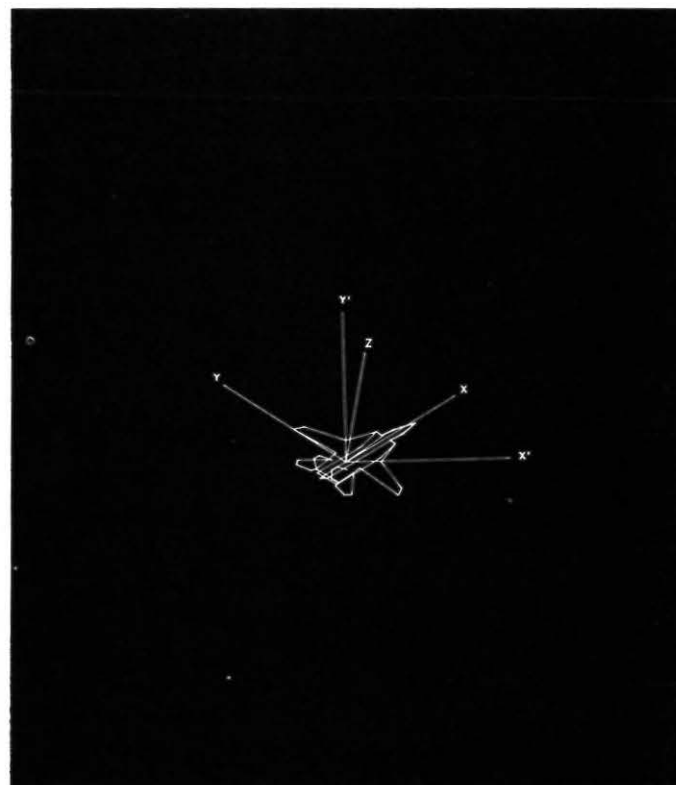


Figure 7b: AGT/150 display of the absolute coordinate list of 7a after three rotations.



$$X' = R11*X + R12*Y + R13*Z$$

$$Y' = R21*X + R22*Y + R23*Z$$

In order to compose multiple sequential rotations, it is also necessary to compute  $Z'$ . The hardware in this system utilizes the  $Z'$  output to control the intensity depth cuing of the CRT display.

$$Z' = R31*X + R32*Y + R33*Z$$

To include provision for picture scale (PS), individual scale (SC), and translations (DX, DY and DZ), the hybrid operator hardware in the AGT/150 actually implements the following equations:

$$X' = PS* [DX + SC* (R11*X + R12*Y + R13*Z)]$$

$$Y' = PS* [DY + SC* (R21*X + R22*Y + R23*Z)]$$

$$Z' = PS* [DZ + SC* (R31*X + R32*Y + R33*Z)]$$

In block diagram form, the organization of these elements is shown in Figure 8. The program that is processing an image

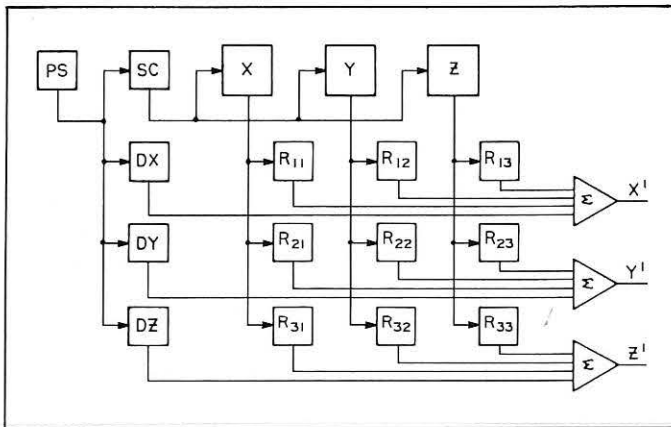


Figure 8: Block diagram of the coordinate transformation array.

list to generate the CRT picture computes the matrix coefficients (R11 to R33), the translations (DX, DY and DZ), scales (PS, SC) and intensity gradient control values, and loads these digital values into the hybrid operator. All subsequent vector items in the display frame are then passed through the hybrid array operation. The hybrid operator is capable of performing the 16 multiplications and 12 additions indicated in four  $\mu$ s. New values can be loaded into the array at any time within a list, so that portions of an image can be separately rotated and translated by hardware operations. In order to position and orient the ACMR aircraft image, this hardware facility is essential.

To display the image transformed as in Figure 7b, the standard software display operator GRAFX would, for each refresh frame, process a list similar to:

```

IMAGE:  ROTATE about X†  Value 1
         ROTATE about Y   Value 2
         ROTATE about Z   Value 3
         2-D TABLE       F-14 Aircraft Image Coordinates
         END OF LIST
  
```

The GRAFX routine is a sequential list processor, and will compose each rotation item when found onto the current transformation, which at the start of each frame is set to an identity transform. For example, the mathematical operation

† Hereafter referred to as ROTATE-X

performed to compose a ROTATE-X item onto an existing transform is a matrix multiplication of the incremental matrix of the new angle and the current matrix.

$$\begin{bmatrix} 1 & 0 & 0 \\ 0 & \sin X & \cos X \\ 0 & \cos X & \sin X \end{bmatrix} \begin{bmatrix} R11 & R12 & R13 \\ R21 & R22 & R23 \\ R31 & R32 & R33 \end{bmatrix} = \text{NEW ARRAY}$$

The composition of rotation items is not commutative; if two rotations were composed in reverse order, a considerably different final result might be achieved.

The position of an aircraft in the ACMR air space is accurately described by knowing its X-position and Y-position on the ground plane, Z-position (elevation), compass heading, pitch angle, and bank angle. A basic image list to display a one-aircraft situation, with the user having overall control of image scale and rotation would be as follows:

	IMAGE:	SCALE	Zoom factor
1			
2		ROTATE-X	Altitude viewing angle
3		ROTATE-Y	Azimuth viewing angle
4		3-D TABLE	Ground image coordinates
5		DX	X ground position
6		DY	Y ground position
7		DZ	Elevation
8		ROTATE-Z	Compass heading
9		ROTATE-Y	Pitch angle
10		ROTATE-X	Bank angle
11		3-D TABLE	F-4 aircraft coordinates
12		END OF LIST	

In this list, only items 4 and 11 are actually causing the vector generator to draw visible lines. All other items are generating the array composition operations. Note that the position for the aircraft is composed onto the current overall transform established by items 1 through 3. The ordering of the composition items is essential. For example, the overall transform is scaled about the center to which it has been off-set, and not the reverse.

The positioning information for a second aircraft added to the list would also have to be composed onto the array that existed after the completion of item 3 (not including any of the positional information of the first aircraft). This can be achieved by adding a SAVE TRANSFORM item between items 3 and 4. This stored transform can later be reinstated by a RESTORE TRANSFORM item, and further composition made upon it. In this form, if this image list were expanded to 4 aircraft, it would then comprise 5 vector drawing items, 27 array composition items, 1 SAVE and 3 RESTORE's.

It becomes apparent that in this type of application, the image processing routine might be spending a majority of the available time within a frame (only 25 ms for 40 frames/sec) in composing changes to the array, and that a significant increase in the vector drawing capability could be achieved by removing this composition load to the background processing level. This is true because the image processing routine is operating on the display interrupt level; in other words, no vectors are being drawn while the processor is composing the new array items.

Processing of vectors continues entirely on an interrupt basis. Background processing goes on between vector starts, and utilizes all the available time between the completion of an image list and the frame clock to start the next frame (process the image list again). This is an oversimplification of the problem since the AGT/150 has 16 interrupt levels and at times many of them are interleaved to accomplish the necessary communication, hard-copy output, disk access, etc. In ad-

dition, there are a large number of tasks which must share background processing in this application, so it is necessary to minimize the time required for the array composition computations.

Significant savings have been achieved by combining the three translations and three rotations to orient an aircraft into one background composition operation, and by adding a tolerably accurate sine/cosine routine requiring 25  $\mu$ s. Special items have been added to the GRAFX display operator to permit loading, in 36  $\mu$ s, of the entire transformation computed in the background, in comparison to the 200+  $\mu$ s to compose one rotation within the image list. The net saving of computation instructions per display frame is very small, but the computation can now be performed concurrently with the display operation, rather than sequentially with it.

With this type of display requirement, the background computation technique has more than doubled the quantity of separately oriented items that can be displayed. This is entirely subjective, as it is a trade-off between the time used for composition and the time used drawing vectors. Longer coordinate list, or fewer transformations, reduce the possible saving. The revised image list for two planes would appear as:

1	IMAGE:	SCALE	
2		ROTATE-X	Altitude viewing angle
3		ROTATE-Y	Azimuth viewing angle
4		3-D TABLE	Ground image coordinates
5		LOAD TRANSFORM	Plane 1
6		3-D TABLE	F-4 aircraft coordinate list
7		LOAD TRANSFORM	Plane 2
8		3-D TABLE	A-4 aircraft coordinate list
9		END OF LIST	

Changing the rotation of the three-dimensional picture, as shown in a sequence of photographs in Figure 6 of a static range situation, represents no additional burden to the processor. The same amount of processor time is utilized for each frame, without consideration of the amount of coordinate change from a previous frame.

#### Maintaining the Aircraft History Trails

The history trail ribbon for each maneuvering aircraft shows the wing-tip positions for the previous 40 seconds of flight (max.). The photographs here show various preliminary trail designs. In the final system, to help resolve any front-back ambiguity, the right wing tip is dashed unless the aircraft is visible from its belly side. In that case, the dash is replaced by a hash-mark across the trail. When the image viewpoint is changed by turning a control dial, the history trail is corrected to portray the top or bottom situation from the new viewpoint. The realism of the display is enhanced by down range scaling applied to each aircraft causing them to decrease in size when flying away. Hardware intensity depth cuing is also applied so that nearer vectors are brighter than more distant vectors.

The history trails are described in ground and elevation coordinates and are computed from the aircraft location by computing the wing-tip position from the three orientation angles and the span of the wing. The length of the history trail can be varied from 0 to 40 seconds, controlled by an input dial on the control panel. The maximum of 40 seconds of history trail is retained in core at all times, even though only a portion may be currently displayed.

In order to make the decision to add a hash-mark or a dash, it must be determined when the belly of the plane is visible. If the surface defined by the aircraft wings is visible from its

upper side, a dash is added; if from the lower side, a hash-mark. This surface can be defined by a line segment perpendicular to it, possibly a line from the base to the tip of the tail. If the Z' output of the array shows that the base of the tail is logically closer to the observer than the Z' value for the tip, then it is easy to show that the aircraft is visible from its belly side regardless of the orientation or viewing angles.

In the coordinate definitions for the aircraft, the wings lie in the X-Y plane. And the tail extends positively in Z. The equation given previously that is implemented by the hybrid operator to produce Z' is:

$$Z' = PS (DZ + SC (R31*X + R32*Y + R33*Z))$$

A line defining the wing surface plane could run from a tail base of (X=0, Y=0, Z=0) to a tip of (X=0, Y=0, Z=100). The Z' output for the base and the tip can be found by solving the equation and the two values compared. Analysis of the equation, however, shows that the PS, DZ and SC terms are constants, and that the X and Y terms are 0 in each case, reducing the equation to:

$$Z' = R33*Z$$

and Z is either 0 or a positive number. For the Z' for the tip to be greater than the Z' for the base, the sign of the R33 term must be positive.

It can be determined, therefore, whether the X-Y plane is visible from the +Z or -Z sides by simply looking at the sign of the R33 matrix coefficient; if positive, the top, and if negative, the belly, of the aircraft is visible. This same technique can also be used for X-Z and Y-Z planes by using R32 and R31 respectively.

#### Additional 3-D Features

Three optional three-dimensional display modes may be selected by depressing buttons on the control panel.

- 1) A plan view of the 100-mile square area that surrounds the range will replace the normal display when a button is held down. This is necessary to monitor the activities of combat and support aircraft approaching the range, and as a quick over-view of the entire range situation.
- 2) A "centroid zoom" mode allows the instructor to select any group of aircraft and to see a display of a portion as small as 1/64 of the range area containing the selected aircraft group. The center of the enlarged display may be continuously adjusted to the centroid of the selected group; in other words the display will follow the maneuvering planes around the range. This mode is particularly important because at the largest magnification, the aircraft can be displayed at true scale, and their maneuvers and interrelationships are even more realistic.
- 3) The view from any pilot's cockpit of his selected target may be requested. This display includes the outline of the pilot's canopy, and the target aircraft oriented and scaled as it would appear to a trained pilot. The dynamic motion of the cockpit viewpoint, which is computed at the DDS, can cause disconcerting display effects such as aircraft apparently flying backwards through the field of view. Various methods of indicating the dynamic motion and orientation of the cockpit are being investigated and may later be added. The ultimate extension of the cockpit display could be to utilize the joystick at the computer console as the aircraft controls, and to run a flight simulator program in the DDS.

Continued on page 31



# SPECIAL EVENTS MEAN EXTRA SALES!

...and the May/June issue of INFORMATION DISPLAY is going to one of the biggest of them all — the American Federation of Information Processing Societies' huge SPRING JOINT COMPUTER CONFERENCE, May 16-18 in Atlantic City, New Jersey. Your advertising in that issue gets Free Bonus Distribution for exposure to an estimated 30,000 attendees at that great event. ...and that's a lot of good, solid sales prospects!

Your year-round advertising in ID is distributed at or near the convention, seminar and exhibition sites where your prime potential buyers gather in concentration. ...but May/June is really something special, with the Society for Information Display's 13th International Symposium coming on the heels of SJCC, May 23-25 in San Francisco, and the 3rd Annual Canadian Computer Show following that, May 30-June 1, in Montreal.

Add to this ID's regular readers — nearly 12,000 strong — and you'll see you're making fantastic extra sales impressions at no extra cost when you advertise in INFORMATION DISPLAY. *Still* only \$845 per b/w page, and far less on a frequency basis. The May/June issue closes April 11, so call right now for prime selling position. ...and results!

**(213) 826-8388**

## Information Display

825 S. BARRINGTON AVENUE / LOS ANGELES, CALIFORNIA 90049





Our famous Projected Map System was one of the first major avionics systems to pass reliability demonstration and qualification testing. Now we're fully qualified and flying aboard the U.S. Air Force A-7D and U.S. Navy A-7E. We haven't forgotten the U.S. Army either. Our PMS is now part of the Army's Tactical Air Guidance System for helicopters.

Backed up by more than 50,000 flight hours, PMS is in action now helping to cut pilot workload to a minimum. It's boosting pilot confidence. Boosting mission flexibility, too. It even makes in-flight target reassignments easier.

All of which make our PMS the most effective interface between pilot and navigation system ever devised.

Just ask the pilots who fly the A-7 attack fighters. They wouldn't leave the deck without us.

For details on our PMS, write to: Avionics Marketing, Computing Devices of Canada Limited, P.O. Box 8508, Ottawa, Ontario, Canada K1G 3M9.

**Our Projected Map System is fully qualified for the A-7D/E.**



**Computing Devices  
of Canada Limited**  
a subsidiary of

**CONTROL DATA  
CORPORATION**

P.O. Box 508 • Ottawa 4 • Ontario • Canada

# Integrated Displays for Multicrew Military Aircraft

JOHN FROST and  
NORMAN F. SULLIVAN

The avionics complex provides the Multicrew Military Aircraft with capabilities for precision worldwide navigation, penetration of sophisticated enemy defenses, and all-weather target acquisition and flexible weapon delivery. A battery of specialized sensors provide information to centralized data processing centers for automatic and semiautomatic conduct of mission operational functions. Controls and displays are required to provide the interface between the human operators comprising the crew and the electronic equipment associated with the functional segments of the avionics configuration. The displays afford a monitoring capability for the augmentation and/or override of automatic controls and provide the means for effecting decisions and manual operations regarding navigation update and weapon delivery, reconnaissance and bomb damage assessment, threat and terrain avoidance and numerous ancillary and supplementary functions.

The following discussion outlines some of the considerations involved in design of these displays and points up certain problem areas common to airborne displays in general.

## Sensor Data

Radar, television and infrared sensors may be used to provide the avionics system with information regarding terrain, lo-

cation of targets and navigational checkpoints, and the location and activity of enemy defensive equipment under a broad range of environmental conditions. Requirements for rapid and accurate threat identification and employment of countermeasures relegate much of the defensive capability of the avionics system to automatic functioning. Penetration aids equipment detects the threats, identifies their nature, and implements the appropriate countermeasures without the requirement of human intervention. Computer mediation of these operations is utilized to provide the defensive operator with a concise, meaningful synthetic display of these ongoing processes, where he may augment or override any of the automatically selected functions.

The navigation and weapon delivery subsystem requires precise high resolution displays be provided to the offensive operator to afford the acquisition of targets and checkpoints and accurate delivery of weapons under varying conditions of illumination and visibility. The multiplicity of sensor configurations and operational modes required to provide this full capability present a variety of data acquisition formats and usually require an intermediate processing stage to prepare the information for appropriate visual presentation. This function may also be employed to store the data to provide a display freeze for accurate and precise cursor laying.



One rather straight forward implementation of these requirements is shown in the block diagram of Figure 1. Information flow is separated into two paths comprising the sensor and synthetic data presentations. The central computer provides the symbol generator with instructions regarding symbol selections and destinations, whereas processed sensor data is routed directly to the displays upon computer command. Switching (not shown) is provided to route any selected presentation to any commanded display surface.

The design philosophy incorporated in this mechanization of avionics sensor data display is based on the fact that information content is more fully preserved when the data presentation format corresponds to the sensor data acquisition format. This criterion requires the sensor displays to be stored and reconstructed with a scan corresponding to the sensor scan. Thus, for example, PPI data is received and stored in range units ordered into azimuth dwell data groups, and subsequently transmitted to the selected display in similar format, eliminating resolution losses associated with format conversion.

### Displays

General requirements imposed on the displays are those of brightness, resolution, contrast, dynamic range, writing speed, etc., required for the generation and presentation of information with parameters concordant with mission objectives. The

displays must exhibit sufficient brightness to permit satisfactory viewing over the range of ambients to be encountered. An upper figure of 50 F.L. has been assumed for controlled-ambient avionics crewstation lighting, affording satisfactory lighting for moving about the area, writing, and reading fine print. In certain cases commonality of equipment may be achieved with the forward cockpit configuration affording sizeable cost and logistics savings. The forward station ambients may exceed several thousand F.L., however, requiring compromises in equipment design to accommodate to these requirements.

Resolution parameters specified for the equipment must be compatible with requirements for the operators to recognize targets and checkpoints in accordance with fine detail in the presentations and to afford positioning of the cursors with sufficient accuracy to meet mission objectives. A 735 line system resolution appears to be adequate to satisfy these requirements within the display size, viewing distances, and visual acuity constraints of the display/observer interface and the limitations imposed by the sensors. Resolution on the order of 1000 lines is within the state-of-the-art, but may not be cost-effective for most applications, particularly when considering the storage capacity required to preserve the image.

The prime viewing surface available to the offensive operator will characteristically present sensor derived information, suitably processed for CRT display, and overlaid with sym-

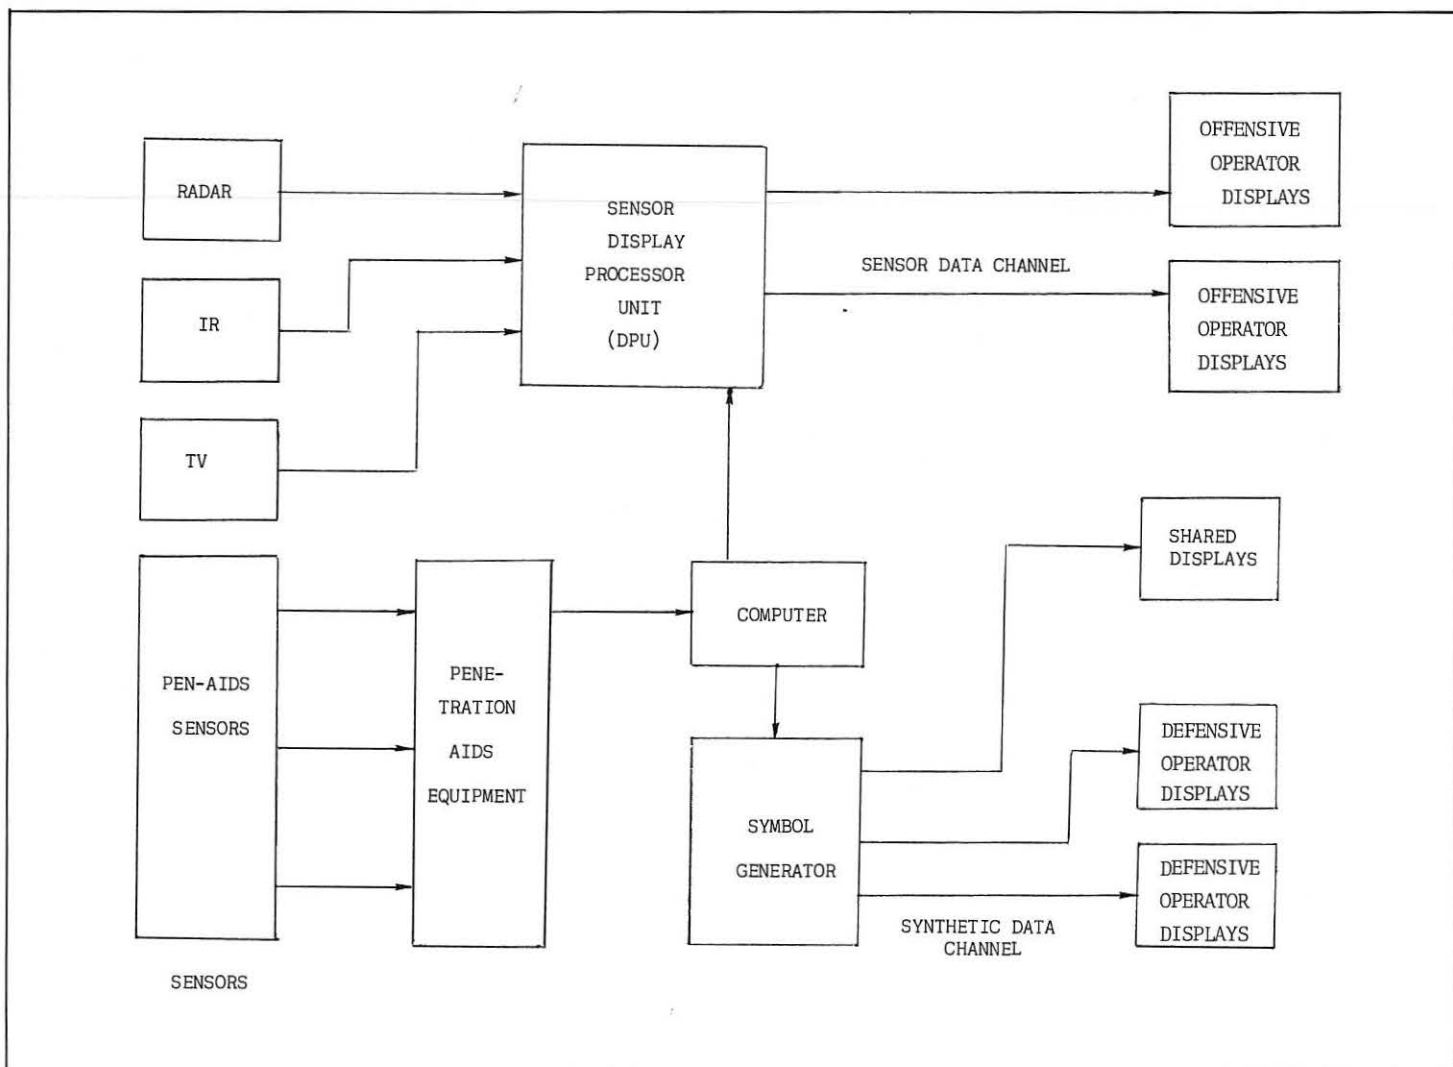


Figure 1: Integrated avionics displays flow diagram.

bology as selected to indicate priority threats, flight path, cursors, and position coordinates. The defensive operator must characteristically view threat situation data in symbolic format against a background representing the surrounding air and ground environment. Threat type, categories, and range of interest are operator selectable. Auxiliary displays are provided both operators for the presentation of supplementary data and to act as backup for the primary display. These auxiliary surfaces are utilized to show alternate sensor presentations, written instructions or routines, numeric readouts describing selected parameters, or data concerning status of selected systems or functions. The various modes of operation are manually initiated via selections adjacent to the viewing surface, or may be automatically selected in accordance with pre-established routines.

The reliability and flexibility available from this arrangement assures compatibility with operational requirements for backup capability and operator task-sharing.

### Display Processor Unit (DPU)

The DPU comprises the sensor data processing center for the avionics displays. Its function is to accept data from the sensors in a variety of forms and prepare it for CRT presentation in a comprehensible format with a minimum loss in information content. The DPU must refresh the display within the flicker fusion envelope and be capable upon external command of freezing sensor data inputs. These requirements dictate the basic functional elements of the unit, i.e., a high capacity bulk storage capability with flexible input and output formatting modules. Digital mechanization appears to offer the greatest promise for meeting typical requirements of accuracy, flexibility, reliability, and resolution. Trends toward radar preprocessing associate digital outputs from the sensor complex with high resolution modes. In addition the intrinsic reliability and noise immunity of digital systems appears more attractive for most applications.

Of the available alternates to digital mechanization of the DPU, the scan converter tube and the direct view storage tube have been considered in detail. Of this latter option, the most outstanding candidate appears to be a four-gun device accommodating flood, write, selective erase, and write-through functions through the use of separate elements. Off-axis electron optics and multiple field interactions, however, currently degrade cursor positional accuracy beyond the limits of standard operational requirements. In addition, electrostatic storage mesh energy requirements limit maximum write rates to about 70,000 in/sec precluding direct freeze of high resolution TV and IR presentations.

The scan converter tube is also regarded as less than optimum for this application due to the highly inflexible design tradeoff framework the available hardware imposes. Unavoidable storage mesh non-uniformities restrict the range of charge density in providing for requisite brightness variation, resulting in inherent dynamic range limitations. In addition, long term storage requirements are incompatible with dynamic high-speed selective erase modes.

Among the available digital mechanizations, the leading contenders appear to be rotating electromechanical memories (magnetic drum or disc) and discrete element arrays consisting of MOS shift registers. The drum approach offers a low per-bit cost which becomes attractive for high capacity systems. The fixed speed and limited periodic access nature of the device imposes problems in formatting the data for CRT presentation, however, and requires the design of a fairly complex input buffer to bridge this incompatibility. The MOS mechanization affords a high degree of flexibility in memory organiza-

tion, and can be cycled over a range of clock speeds to accommodate the diverse requirements of the sensor input formats. In addition, MOS designs appear more attractive from the standpoint of reliability when contrasted with the single point failure vulnerability of the mechanical device.

MOS per-bit costs, however, are currently on the order of 1 or 2 orders of magnitude higher than drum costs. While the prognosis is encouraging, it is doubtful if MOS memories will cost competitive in the near future for capacities in excess of  $1.5 \times 10^6$  bits. This conclusion is derived from consideration of candidate designs comprising fixed costs relative to packaging and peripheral circuits and variable costs as a function of memory capacity. Figure 2 illustrates this case for one specific mechanization.

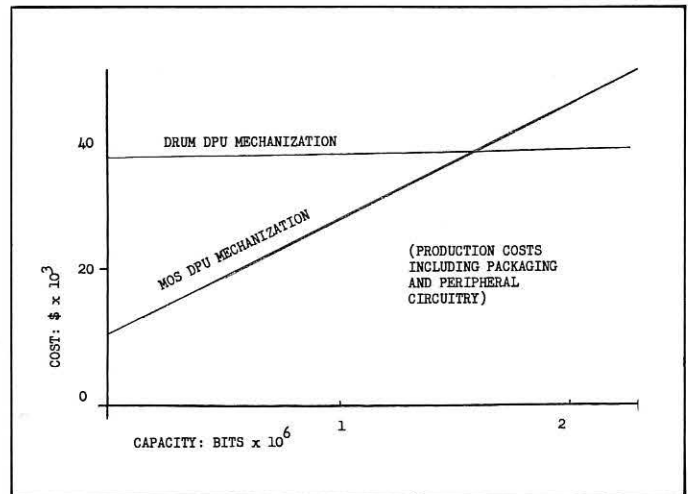


Figure 2: Comparison of MOS vs drum display processor costs for one specific candidate mechanization.

Basic functional elements of the DPU include the main memory and associated input and output buffers. Additional functions include precision cursor implementation, data compression and expansion, self-test and reporting, analog-digital data conversion, and basic timing elements. The adoption of a digital mechanization offers the advantage of precise insertion of the cursor symbol into the quantitized data, reducing the one sigma error below the level of digital resolution. In one candidate mechanization the symbol is positioned by a computer controlled index register. As the operator moves the cursor across the display, outputs are fed to the central avionics computer, which notes current address and controls the register. Comparators detect coincidence of the index and the DPU video, and route high intensity instructions to the output buffer superseding the stored data at the cursor location.

Compression of intensity data appears to be a prerequisite for any digital DPU mechanization in order to bring the design to a point of optimum cost effectiveness. Drum designs require compression to reduce the number of read-write heads and data channels. The MOS implementations undergo a 30 percent reduction in memory parts-count when using standard data-compression techniques. The method involves the derivation and storage of intensity differences rather than utilization of the absolute level of signal amplitude. The data is reconstituted in approximately original form prior to display.

The variety of compression schemes that have been advanced can be ordered in a hierarchy of fidelity of reconstructed presentation, with increasing cost running roughly in the same direction. A popular scheme (delta modulation) encodes the  $\log_2$  of the difference between successive picture elements. The rationale for this approach is based on the eye's

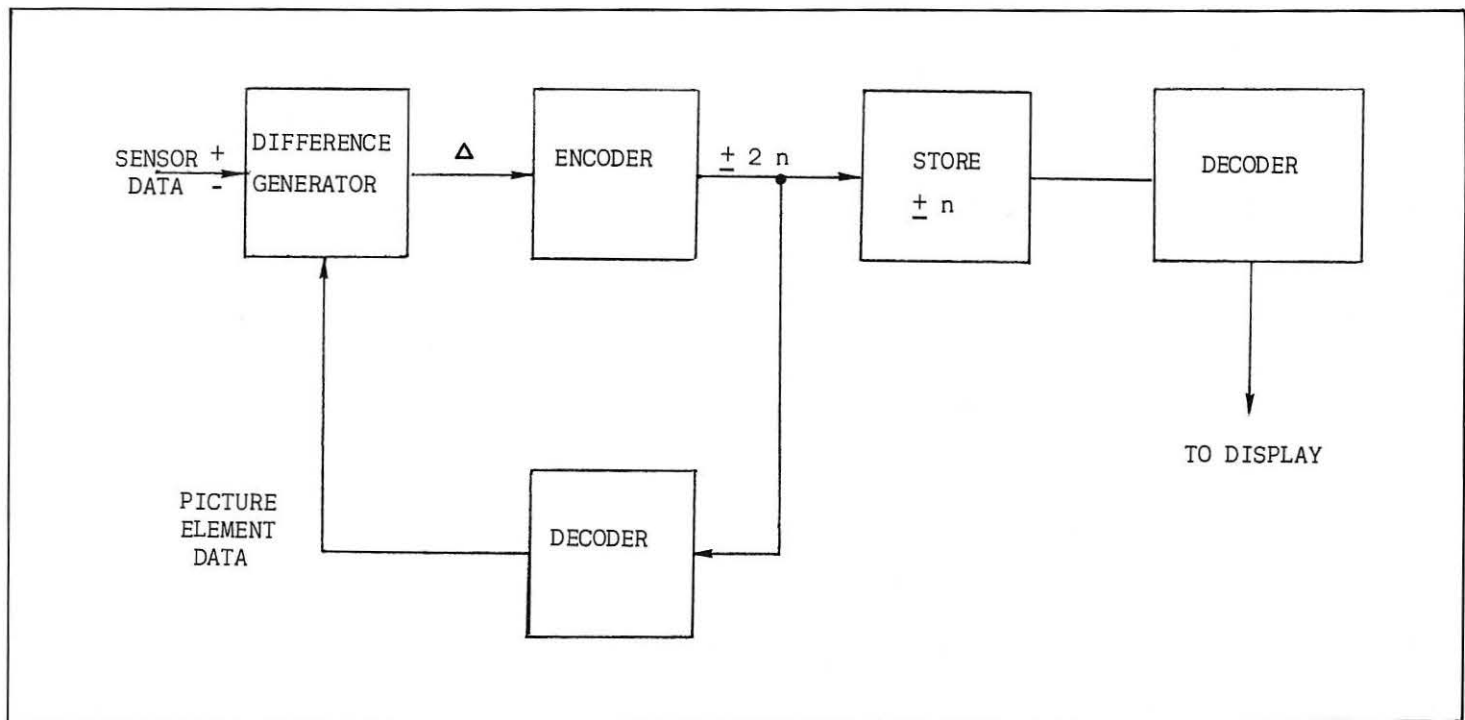


Figure 3: Delta modulation compression scheme.

sensitivity to intensity differences and its log response characteristic. The encoded data is limited to 3 bits to minimize storage capacity, thus restricting the ability of the system to respond with precision to large intensity changes. Discrepancies are resolved in succeeding iterations, however, and the effect minimized by the eyes accentuation of the leading edge of the step. A fourth bit is added to carry the sign of the change. To prevent errors from propagating, the memory is reset each line during horizontal retrace. A block diagram of the scheme is shown in Figure 3. While more complex approaches are available, the cost effectiveness of the additional circuitry involved is questionable. Operational simulations using human subjects are recommended to judge the efficacy of these designs and generate the data required to arrive at an optimum configuration.

#### Synthetic Data Channel

Symbolic information representing threat type, location, and lethal range must be provided to the defensive operator to assist in the task of threat avoidance, degradation, or destruction. An adjacent display surface is utilized to provide data regarding the automatic countermeasures employed against priority threats. The observer can alter the mode of defense as desired through keyboard entry located on the console. The revised message is then displayed, verifying computer acknowledgement of the change. Symbolic formats are also used to indicate the type and status of on-board weaponry for the advisement of both offensive and defensive operators. Any of these displays can be selected on any display surface, affording a maximum of operational flexibility and task-sharing capability among the crew members.

This extensive use of symbolic data imposes requirements, directly or indirectly, on all segments of the display system. Maximum symbol display requirements are determined from the ability of the operators to derive meaningful information from a cluttered display representing a dense threat environment and by the definition of optimum formats for the presentation of tabular data.

Other considerations involve development of a symbol reper-

toire acceptable to the user and possessing the characteristics of legibility and intrinsic information content. A font must be derived to yield a maximum of discriminability while avoiding excessive CRT deflection bandwidth requirements associated with highly complex characters.

High quality symbology may be generated on the face of the CRT's by linear Class A beam deflection techniques. These symbols are written in calligraphic style much in the same manner as a pen is used to form English language script. Calligraphic techniques are a natural fallout of the flexible sensor display format philosophy which initiated the requirement for Class A deflection. The absence of a standard raster precludes the generation of overlay symbology through precision timing of beam unblank signals (i.e., in-raster symbol generation techniques) and forces the choice of stroke symbology for all symbol presentations.

Certain advantages are inherent to stroke symbology, including greater legibility and flexibility and simplified circuitry associated with the symbol library. Calligraphic writing is insensitive to interlace jitter and small symbols are not constrained by the inherent limitations of raster geometry. Hardware requirements tend to be somewhat simpler and are not sensitive to precision timing and delay problems peculiar to in-raster symbol generators.

Disadvantages of the calligraphic approach center around high power requirements and basic limitations in CRT beam deflection bandwidth capability. Care must be used in equipment design to minimize power consumption and provide adequate cooling to the hardware enclosure. Bandwidth limitations may be attacked from several viewpoints, including the use of specialized coil design techniques.

Moderate to low ambients in the crewstation environment make the eye sensitive to flicker and require the symbols be refreshed 50-60 times a second. A message comprising some 400 characters for example allots an average time per character of about 40  $\mu$ sec including beam positioning and setting time. Tabular data presentations may be written position sequentially in a fixed page format, minimizing positioning times. Threat situation information is positioned randomly, however, and in-



volves requirements for long position and settling times. Consideration must be given to tradeoffs between the high power required for fast deflection and the additional size and weight associated with a vernier write coil. This latter arrangement involves the use of two separate electrically isolated deflection coils per CRT gun to simultaneously accomplish rapid, large deflection excursions, and accommodate the precision required for high resolution calligraphic symbology. The main coil positions the beam (using moderate power) and the index point, where a vernier low inductance coil moves the beam rapidly to write the symbols (the main coil is also used to generate the various sensor displays and write the required vectors).

The Symbol Generator Unit (SGU) accepts computer derived data regarding symbol type, size, position, orientation and destination and converts the information to beam deflection instructions appropriate to the CRT of interest. The information may be transmitted in analog (x, y, z) format provided line lengths are short and the local EMI environment is not severe. Digital transmission is less sensitive to noise, but requires the installation of high speed A/C converters at each display destination.

Buffers must be provided to store the computer messages and provide the refresh capability to maintain a flicker-free display. Since the computer instructions consist of significantly fewer words than the complex beam deflection instructions, the refresh buffers are located upstream of the symbol library, requiring, in effect, a dedicated library per display. This arrangement is shown in Figure 4. Since the buffers comprise a large fraction of SGU cost and bulk, a desirable option involves utilization of the computer memory to provide the refresh function, effectively updating every symbol at the refresh rate. Computer cycle stealing considerations must be traded off against this option, however, and may well preclude its adoption.

A number of symbol generator mechanization schemes are available. A 16 dot matrix can be used to represent stroke termination points, readily identified by incremental instructions of 0, 1, 2, or 3 bits in x and y directions. Strokes may be generated in sub-microsecond periods, and joined at these points in sequence to form the desired character. An alternate scheme

involves the positioning of the beam through a predetermined course with unblanking at critical points in the matrix. Simple patterns have been proposed, yielding stylized characters at minimal expense. Human factors considerations require at least 16 stroke options be available, however. Characters thus generated offer few ambiguities, but legibility is less than optimum. The nature of the threat display function requires all commanded symbology be presented to the operator without error. Failure to display threat information or the display of misinformation may have serious consequences and requires the use of redundancy and self-test techniques in the design of the hardware. Redundant libraries are recommended, with automatic switching effected in the absence of positive self-test results. Several alternates are possible, including the periodic presentation of the entire repertoire to the operator for examination.

### Displays in the Radiation Environment

The avionics displays must be designed to meet system specification requirements for the nuclear environment. Computer/display interface activity is suspended during critical periods and controls are required to maintain the selected state during this time. Control panel input/output logic and mechanization circuitry must be designed and components selected to meet this criterion. Temporary loss of the display presentation for a period of less than 16 ms will not be detected by the eye.

Specific areas of concern are limited to the physical aspects of the cathode ray tube (in particular the phosphor screen), MOS circuit mechanizations, and general requirements attendant to the Electromagnetic Pulse (EMP) environment.

The relatively low ionizing deposition rates of the prompt and delayed ionizing radiation do not seriously degrade CRT performance. Tests indicate the prompt gamma pulse causes CRT phosphors to emit a rather subdued, extremely fast flash of light which does not interfere appreciably with the observer's mission performance. The total ionizing dose may result in a 10-20 percent decrease in light transmission of the faceplate. This loss is comparable to that sustained during the normal CRT lifetime due to the action of the electron guns. In addition, radiation received while examining targets previously

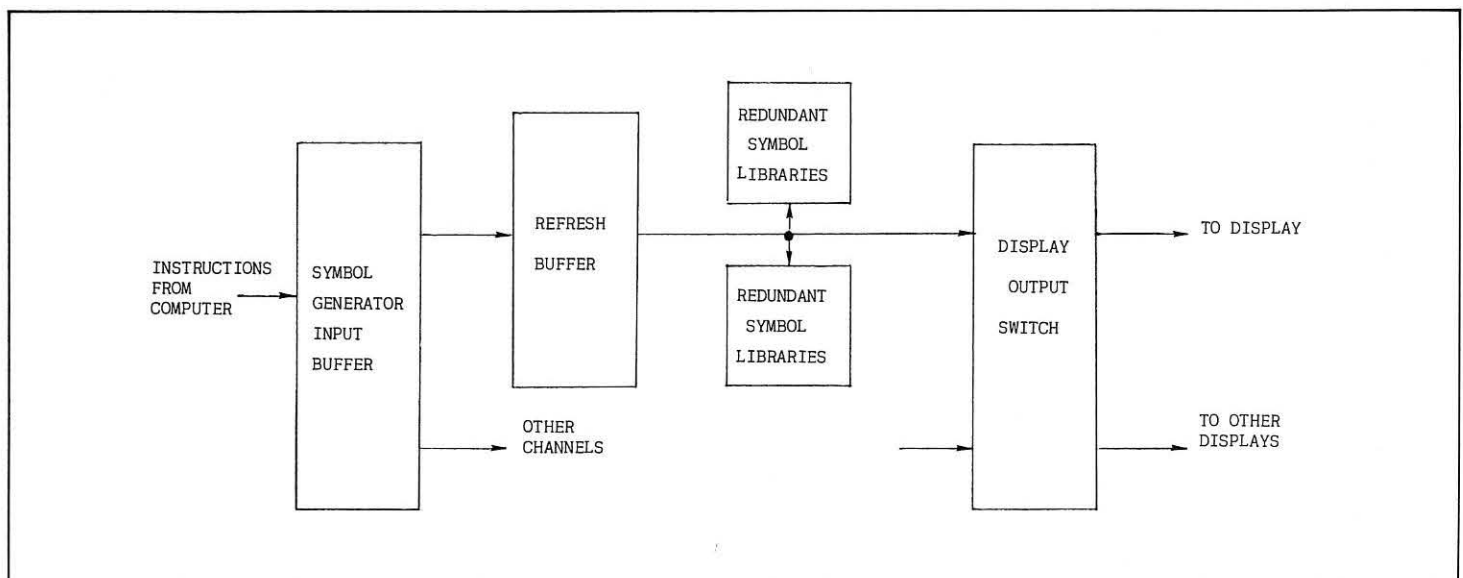


Figure 4: Symbol generator — internal refresh option.

## COMPUTER GRAPHICS AND IMAGE PROCESSING

### An International Journal

edited by **HERBERT FREEMAN**, Dept. of Electrical Engineering, New York Univ., Univ. Heights, Bronx, **THOMAS S. HUANG**, Dept. of Electrical Engineering, Mass. Inst. of Technology, Cambridge, **AZRIEL ROSENFELD**, Computer Science Center, Univ. of Md., College Park, and **ANDRIES VAN DAM**, Center for Computer and Information Sciences, Brown Univ., Providence, R.I.

EDITORIAL OFFICE: Computer Science Center, Univ. of Maryland

Computer Graphics and Image Processing publishes papers of high quality dealing with the computer processing of pictorial information. Topics covered include image compression, image enhancement, pictorial pattern recognition, scene analysis, and interactive graphics. The literature on these subjects is currently scattered over a large number of journals in computer science, electrical engineering, optics, and other fields. The present journal provides a focal point for the best of this literature. Emphasis is placed on research papers, but expository or review papers, as well as application-oriented papers embodying novel concepts, are also accepted. Special sections are devoted to bibliographies, reviews, algorithms, and short notes.

Volume 1, 1972 (4 issues) \$28.00

(Please add \$1.60 for postage outside U.S.A. and Canada)

## COMPUTER-ORIENTED APPROACHES TO PATTERN RECOGNITION

by **WILLIAM S. MEISEL**, Technology Service Corp., Santa Monica, Calif., and Electrical Engineering and Computer Science Dept., Univ. of Southern Calif.

**CONTENTS:** Basic Concepts and Methods in Mathematical Pattern Recognition. The Statistical Formulation and Parametric Methods. Introduction to Optimization Techniques. Linear Discriminant Functions and Extensions. Indirect Approximation of Probability Densities. Direct Construction of Probability Densities: Potential Functions. Piecewise Linear Discriminant Functions. Cluster Analysis and Unsupervised Learning. Feature Selection. Special Topics. Appendix A: A Set of Orthonormal Polynomials. Appendix B: Efficient Representation and Approximation of Multivariate Functions.

March 1972, about 250 pp., \$15.00

## ELECTRONIC IMAGE STORAGE

by **B. KAZAN** and **M. KNOLL**

With contributions by **W. HARTH**

This book surveys the various types of electronic devices, both commercial and experimental, which are capable of retaining image pattern information. It explains the operation of these devices, stressing the underlying physical phenomena and the electronic principles. Where possible the limitations and capabilities of these devices are also discussed.

**CONTENTS:** Basic Processes. Writing and Reading in Charge-Storage Vacuum Devices. Signal Converter Devices (Electrical-Electrical). Display Devices (Electrical-Visual). Camera Pickup Devices (Visual-Electrical). Image-Converter Devices (Visual-Visual). Appendix A: Storage-Tube Definitions. Appendix B: Electron Trajectories of Transmission-Modulation Storage Targets. Author Index—Subject Index.

1968, 498 pp., \$19.50

## ACADEMIC PRESS

NEW YORK AND LONDON

111 FIFTH AVENUE, NEW YORK, N. Y. 10003

subjected to nuclear attacks may be sufficient to cause loss in contrast if targets are examined too close and too soon after a nuclear strike.

CRT phosphors are considered relatively insensitive to neutron bombardment due to the noncrystalline structure of the material. Fluence levels are significantly below the levels required to cause the coating to flake off the inner surface of the CRT face. Thresholds for damage to CRT glass and internal electron optics components are well above anticipated dosage.

EMP's may penetrate the interior of the device but will be appreciably attenuated by the presence of electrically conducting panels in the vicinity. Additional protection will be provided by the addition of magnetic shielding around the backside of the CRT. Higher frequencies may penetrate, inducing small voltages and/or currents in the interior conductors, causing temporary spurious beam deflections. The internal elements, including cathode, gun, and supporting structure are too small to pick up much signal, and are ordinarily capable of withstanding much larger signal than those induced.

MOS hardware is currently under consideration for the display processor main storage block, as well as for the associated buffers. Major stores in other components, in particular the refresh buffers in the symbol generator, are envisioned as MOS shift registers. These devices are relatively resistant to neutron radiation, but may be damaged by exposure to ionizing radiation. The major effect is an increase in the gate threshold which is cumulative with increasing dose and is dependent on gate bias applied during irradiation. Tests conducted on typical MOS transistors indicate a worst case shift of less than 1 V at dose levels comparable to upper limits for manned systems. Well designed digital circuits should accommodate this change with no significant performance degradation. MOS components utilized in linear applications must be reviewed carefully for susceptibility to the ionizing radiation environment. Transient effects may prove to be of more significance, generating photo-currents at the source and drain junctions of MOS transistors.

The EMP problem is offset by the incorporation of total cable shielding including connector conductive finish and shield-to-connector bonding. Equipment housing is conductive and capable of bare metal-to-metal contact with the connector.

### Conclusion

High performance military aircraft designed to negotiate complex flight profiles using precision all weather navigation, counter sophisticated enemy defenses, and accurately deliver weapons pose a specialized set of problems to the display systems designer. While it is not possible to outline all of the engineering tradeoffs associated with this design area, this discussion should serve to illustrate the complexity of the system and the ramifications of early engineering decisions. Trends are evident in the choice of digital techniques both for data transmission and processing, in the adoption of high speed CRT's for versatile and flexible employment of data display mode options, and in the use of linear Class A deflection techniques to preserve sensor presentation information content and generate symbols of superior legibility. It is also evident that the necessity for initially considering the avionics system as an integrated unit will result in a display subsystem optimized for cost-effectiveness. ■

*John Frost and Norman Sullivan are with Autonetics of North American Rockwell, Anaheim, Calif.*




# IS YOUR FUTURE BLOCKED BY OUTDATED EDUCATION?



Technological advances can make you a victim of obsolescence just a few years after getting your degree! You must continue to advance your professional skills to stay abreast of rapidly changing developments. If not, you're tying yourself in knots by failing to keep alert to what's new in your profession.

Don't take chances on being "left behind" where your future is involved. There's too much at stake. Profit from the **UNIVERSITY SEMINAR DIRECTORY**, a comprehensive, what's-new source to help you avoid post-graduate obsolescence. Up-dated quarterly and cross-indexed for convenient use, the Directory provides a one-source listing of short courses, seminars, workshops and conferences . . . all compiled from a survey of more than 400 national universities and colleges. Your selection of courses in your profession, or in related fields, is the most logical way to keep pace with the rapidly expanding developments in today's inter-related technologies. Be freed from the bounds of obsolescence — order your subscription for the **UNIVERSITY SEMINAR DIRECTORY**, today!

University Seminar  
Directory



*Don't let technological progress  
make you obsolete.*

*Protect your future. Order today.*

Clip Coupon and mail to:

**UNIVERSITY SEMINAR DIRECTORY**

**825 S. Barrington Ave.  
Los Angeles, Calif. 90049**

YES! Start my personal subscription to University Seminar Directory and send me each quarterly issue published in January, April, July and October.

☐ Check enclosed ☐ Bill my company ☐ Bill me — start sending copies on receipt of my check

☐ 3 Years @ \$110 ☐ 2 Years @ \$75 ☐ 1 Year @ \$50

NAME \_\_\_\_\_ TITLE \_\_\_\_\_

COMPANY \_\_\_\_\_

STREET \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

(Make checks payable to University Seminar Directory. Foreign subscribers add \$10.)

Date \_\_\_\_\_ Signature \_\_\_\_\_



# ID Readout

## Computer and Data Exhibition

More than 60 United States manufacturers of computers, peripheral equipment and related electronic gear have applied for participation in an exhibition exclusively for U.S. made computers and data equipment to be held in Moscow, April 10-18, 1972. The exclusive showing of the data processing and communications equipment has been arranged by International Media and Exhibits Inc., Newark, N.J., in cooperation with the Foreign Trade Ministry and government purchasing agencies of the U.S.S.R.

Equipment to be shown will include: general purpose digital computers, data communications terminals, facilities and processing equipment, graphic data systems, hybrid and analog computers, internal memory systems, peripheral systems and semiconductors and MSI circuits.

Further information about the exhibition is available from Melville Morris, International Media and Exhibits Inc., 231 Johnson Ave., Newark, N.J. 07109, or call (201) 242-3320.

## CADEX '72

Following the conference and exhibition held in 1969 on the subject of computer aided design, it was generally acceded by all who took part that another such event be planned. This even is now being organized and will take place at Southampton University April 25-28, 1972.

The exhibition will be housed in the electronics block and associated buildings. The scope of the exhibition will cover all aspects of engineering-oriented computer programs intended as an aid to design processes in spheres of electrical/electronic engineering covering the range from power to circuit applications and mechanical engineering for both machinery and structure.

Inquiries and application forms for space should be directed to the Information Office, Electronic Engineering Assn., Leicester House, 8 Leicester St., London WC2H 7BN. Conference information can be obtained from Ann Cook, Conference Dept., Institution of Electrical Engineers, Savoy Pl., London WC2R 0BL, England, or phone 01-240-1871.

## NMA Seminar

Six industry spokesmen will assume the seer role to launch the educational aspect of the National Microfilm Association's 21st annual convention May 9-12, 1972, in New York City.

In a theater-in-the-round setting, seminar chairman George Bernstein's lead-off program will focus attention on the future immediately ahead. Participants in the unstructured, unrehearsed, give-and-take session will include Ian Mallender, David R. Wolf, Milton Mandel, Allen Veaner and Franklin Bolnick. Moderating the program will be John R. White.

On Tuesday, May 9, an issues and answers seminar will take place in the morning, and a seminar on basic microfilm technology will be conducted in the afternoon. On Wednesday morning, May 10, there will be seminars on systems analysis, new developments in film technology, microfilm marketing techniques, microfilm as a mass medium and microfilm in the classroom. Afternoon seminars will include micropublishing, systems design, large scale production, data handling, and spectrum of the reader. Thursday, May 11, will offer computer animation, computer output microfilming, standards, trained manpower, real time vs on-time, and microfilm in research libraries. On Friday, May 12, four workshops will be conducted: storage and retrieval, scientific and engineering uses,

office records and computer output/computer input microfilm.

For further information write to the National Microfilm Assn., Suite 1101, 8728 Colesville Rd., Silver Spring, Md. 20910.

## Joint Computer Conference

Computer specialists and EDP users from the U.S. and abroad will convene in Atlantic City, May 16-18, for a review of recent developments in computer technology and expected trends for the 1970s. Sponsored by the American Federation of Information Processing Societies (AFIPS), the 1972 Spring Joint Computer Conference will be held in the Atlantic City Convention Hall.

According to Dr. Jack Bertram, Conference general chairman, the program will include 37 sessions covering innovations and state-of-the-art in computer hardware, software, systems and applications. The program has been structured to allow the attendee maximum flexibility in selecting sessions relating to his specific needs. Whether he elects to register for the entire three-day program, or selects the one-day registration, he will be able to choose from a variety of sessions designed to keep him abreast of the latest developments in his areas of interest.

The program has been divided into six general categories: general applications, scientific applications, general and special purpose hardware, programming and software, computer education and computer theory and administrative issues. Included are 130 formal presentations supplemented by panel sessions.

For further information, including pre-registration and housing forms, contact AFIPS at 210 Summit Ave., Montvale, N.J. 07645, or phone (201) 391-9810.

# CATHODE RAY TUBES

WE OFFER YOU TECHNICAL ABILITY FOR  
ANY SPECIAL CRT AND DISPLAY SYSTEM

**CRT**  
FIBER OPTIC FACE  
BACK PORTED  
MONOSCOPES  
HIGH RESOLUTION  
CUSTOM GEOMETRIES  
PHOSPHOR SCREENS  
ELECTRON OPTICS.

**SYSTEMS**  
FLYING SPOT SCANNERS,  
MONITORS, FIBER OPTIC  
PRINTERS, DATA TERMINALS.



DESIGN — DEVELOPMENT —  
PRODUCTION — TUBES AND  
SYSTEMS.

M. SADOWSKY

S. CARLISLE

P. KEEGAN

## SPECIAL PURPOSE TUBE COMPANY

14746-C RAYMER ST., VAN NUYS, CA. 91405

Tel. (213) 989-4610

## Summary

The ACMR promises to set an entirely new direction for combat pilot training. In recent years, the bill for pilot training for the U.S. military services has come to well over \$2 billion a year.\* Such rising costs and budget scrutiny of them have resulted in training cutbacks which serve to make pilots much less confident of their ability in the aircraft. The economical attempts to remedy this situation have largely been confined to using simulators, which, though marginally effective, are really technological training products of the 1960's. The ACMR harnesses the electronics and computer display technology of the Seventies to the task of controlling the spiraling costs of weapons training and it promises to be an effective tool in producing capable instructors and skilled pilots.

## Bibliography

1. M.H. Lewin, "An Introduction to Computer Graphic Terminals," *Proceedings of the IEEE*, Vol. 55, No. 9 (1967), pp 1544-1552.
2. J.H. Myer and I.E. Sutherland, "On the Design of Display Processors," *Communications of the ACM*, Vol. II, No. 6 (June 1968), pp 410-414.
3. T.G. Hagan and R. Treiber, "Hybrid Analog/Digital Techniques for Signal Processing Applications," *AFIPS Conference Proceedings*, Vol. 28 (1966), pp 379-388.
4. T.G. Hagan, Richard J. Nixon and Luis J. Shaefer, "The Adage Graphics Terminal," *AFIPS Conference Proceedings*, Vol. 33 (1968).
5. W.A. Stewart, Chairman, and E.S. Wainstein, Rapporteur, *Rand*

*Symposium on Pilot Training and the Pilot Career: Final Report* (December 1970).

\**Rand Symposium on Pilot Training and the Pilot Career: Final Report*, December 1970, p 3.



Kevin J. Kinsella is Applications Engineer at Adage Inc., Boston, Mass. Mr. Kinsella received his M.A. in International Relations from John Hopkins University, Washington, D.C., and his B.S. in Management from the Massachusetts Institute of Technology, Cambridge, Mass. Previous to his employment at Adage, he was a research writer for Stockholm International Peace Research Institute, a mathematics teacher for the American Community School, Beirut, Lebanon, and did systems research in the Factoring Department for the First National Bank of Boston.



Andrew J. Matthews is the Project Leader at Adage Inc., Boston, Mass., responsible for the design and development of the 3-D displays for the ACMR system. Mr. Matthews received his B.S. in Engineering from Boston University, and joined Adage in 1969 after working on computer applications in the U.S. Navy. His previous projects have included a 3-dimensional drawing and editing system, a contour map display and editing system, and a variety of real-time simulation displays.



## Working with shady characters can cost you money.

Lear Siegler's new LSI 7700 is the only Interactive Display Terminal that eliminates costly mistakes from shady characters. Its 12-inch glare-free screen with large, easy-to-read characters avoids mistakes caused by misreading displayed input.

The 7700 is available in 1,000 or 2,000 character versions. Both are self-contained—equipped with keyboard, control and editing logic, character generator, refresh memory, interface and split screen.


The versatile 7700 offers a wide range of interfaces, which include EIA standard RS 232, parallel transfer rate up to 15,750 characters per second, and optional serial rates up to 120,000 bps.

For more information on how to avoid shady characters, write today to:

LEAR SIEGLER, INC.  
714 No. Brookhurst Street  
Anaheim, Calif. 92803  
(714) 774-1010



# CRT FILM SCANNERS

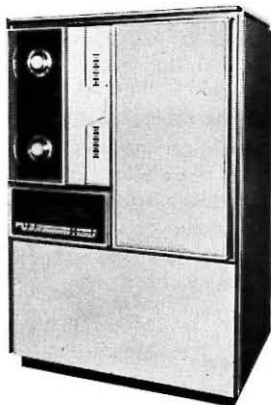

## Beta SCAN 210

Geared to the requirements of researchers and systems designers, the *Beta SCAN Family* of high resolution CRT scanners converts visual images on film to electrical information.

### For:

- Biomedical Research
- Image Enhancement
- Flying Spot Scanners
- PEPR Systems
- Pattern Recognition
- Digitizing Drawings
- Film to Video Tape Conversion

### Featuring:

- Raster or Random Scan
- Twenty-Four Density Levels
- Source Brightness Compensation
- Linearity Correction and Dynamic Focus

Also ask the *Datahandlers of Gould* about CRT display modules, precision displays and microfilm recorders.

Gould Inc., Data Systems Division, 20 Ossipee Road, Newton Upper Falls, Mass. 02164. Telephone 617/969-6510.



# New Literature

## Magnetic Shielding

An eight-page two-color catalog has been issued by Ad-Vance Magnetics Inc., Rochester, Ind., describing its facilities and products. AD-MU magnetic shielding materials and components described include seven types of round tape data protectors and seven types of square tape data protectors; 312 types of quality magnetic shields for photomultiplier tubes; a table of physical characteristics of AD-MU shielding alloys and available dimensions of these alloys; and a description of the various steps in fabricating AD-MU alloys.

Circle Reader Service Card No. 9

## Health Care Services

"Patient Monitoring" and "Frontiers in Health Care," two brochures describing Xerox Data Systems' products and services for the health care industry, are available from XDS, El Segundo, Calif. "Patient Monitoring" explains where XDS computer-based monitoring systems can be applied, the types of physiological signals they can monitor and the benefits of using these systems. The other brochure describes Xerox computer applications in the areas of hospital services, administration and health care, including examples of computer-assisted ECG analysis and clinical laboratory automation techniques.

Circle Reader Service Card No. 10

## Display/Memory Units

An illustrated brochure describing their line of Digivue display/memory units has been issued by Owens-Illinois Inc., Toledo, Ohio. The brochure discusses such features as inherent memory, selective write, rear projection and hard copy potential. Also provided is a description of available size and resolution characteristics. Photographs show suggested applications for the display/memory units. Illustrated descriptions of the first three available modes, a schematic diagram and discussion of the operating principles of the Digivue display/memory technique also are included.

Circle Reader Service Card No. 11

## Neon Indicator Lights

A catalog describing a line of neon indicator lights for warning devices has been published by Dialight Corp., Brooklyn, N.Y. The catalog (L-211) lists snap-in mounting lights of both flashing and permanent type. Designed for operation on 110-125 VAC, the lights flash at a nominal rate of 130 flashes per minute. Dialight claims that complete information on size and mounting of the indicators is given. Ordering information includes choice of black or gray bezel with red, yellow (amber) or white transparent lenses. The lights are supplied as sealed units containing all necessary components and circuitry on a printed circuit board. The end of the board extending from the back of the unit has eyelets for soldering connections. The styling of these indicators makes them suited for applications in warning systems where space is at a premium.

Circle Reader Service Card No. 12

## Light Sources

Dr. John F. Waymouth of GTE Sylvania Inc., New York, N.Y., is the author of "Electric Discharge Lamps," a book on light sources. Mathematical formulas, chemical equilibria, types of electrodes, reignition voltages, measures of thorium removal rates, arc-tube geometry, temperature variations, evaluation of theory, and electrolysis are some of the subjects covered. Dr. Waymouth discusses fluorescent lamps; high pressure mercury lamps; low and high pressure sodium lamps, and metal halide arc lamps, including the operating circuitry of discharge lamps.

Circle Reader Service Card No. 13

## Pollution Monitoring

A multi-paged technical report, "Monitoring Environmental Pollution," is available in reprint form from Spatial Data Systems Inc., Goleta, Calif. Focusing on the Santa Barbara channel oil-pollution disaster, the report sets forth an economical way to scientifically monitor the aerial extent and amount of pollutants and, in addition, provide early-detection services. The article, co-authored by Dr. John Estes and Dr. Berl Golomb, presents enhanced images produced on Datacolor film reader system, a color densitometer which represents the density values of a given photograph as analog voltage levels of a video signal which can be displayed in color.

Circle Reader Service Card No. 14

## Selection Guide

A six-page product selection guide covering highlight parameters on the company's standard lighted pushbutton switches and indicators, fiber-optic readouts, illuminated word indicators and unlighted switch assemblies is available from Master Specialties Co., Data Distribution Dept., Costa Mesa, Calif. The selection criteria are organized in tables and each product category is referenced to specific catalog numbers. Included in the selection guide are comparative design and performance data on some of the MSC lines.

Circle Reader Service Card No. 15

## Officials Directory

The National Microfilm Assoc., Silver Spring, Md., has ready for distribution a directory of their officials. The directory lists names and addresses for all officers, directors, committee members and chapter presidents. The publication shows two more permanent and two more ad hoc committees than last year. The ad hoc committees created in the past year include one on Rehabilitation and one on Professional Certification.

Circle Reader Service Card No. 16

## Information Systems

Computer Communications Inc., Culver City, Calif., announces the availability of a 16-page brochure that describes and illustrates its information systems, products and services. Each of the computer/communication systems and products discussed is accompanied by a description of the equipment together with pictures, diagrams and specifications.

Circle Reader Service Card No. 17



# ID Products

## Solid State Display

A seven-segment solid state display that requires low power and has a character height of 0.19 in. is available from the Monsanto Co., New York. The MAN 4 is claimed to provide a visible display with inputs as low as 1 mA and 1.65 V. The unit is a common-cathode device with a built-in red lens for improved contrast between the display and its package. The MAN 4 emits 400 fL at 10 mA per second. The display is contained in a standard, dual-in-line, 14 pin package which permits mounting on printed-circuit display boards. The dip configuration allows several units to be mounted with 0.35 in. center-to-center spacing. Applications for the MAN 4 include digital displays for desk calculators, instruments and portable equipment, as well as in film-annotation systems.

Circle Reader Service Card No. 18


## Digital Counters

Electronic Digital Counters, designed for industrial applications, have been introduced by Electronic Research Co., a Textron Co., Overland Park, Kans. The panel mounted counters, designated Series 2300, feature numerical displays and provisions for remote control and BCD outputs. The company states, both up/down and uni-directional units are offered with up to 6 units of display. The units are 3 lbs. with power requirements of 115V, 50-400 Hz and 5 watts.

Circle Reader Service Card No. 19

## Display Interconnection

Industrial Electronic Engineers Inc. (IEE), Van Nuys, Calif., has developed a system interconnection feature for their bar segment displays.

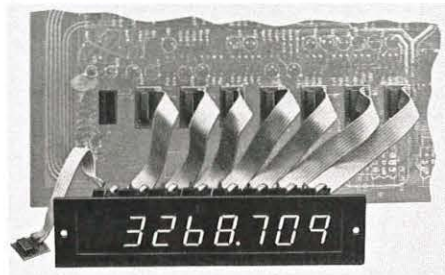

An option ancillary to IEE's Series 1020, 1040 and 1060 incandescent lamp 7 bar segment displays, the feature consists of either 6 in. or optional lengths of flat flexible cable soldered (or fastened by a terminal) to the display's lamp assembly at one end and a circuit board adapter at the other. IEE says that the adapter board is configured to accept a choice of hybrid or monolithic driver/decoders in a DIP socket of the circuit board.

Circle Reader Service Card No. 20

## Flight Information System

Dayton Communications Corp., Dayton, Ohio, introduces an airline flight information display system featuring a cassette tape system. According to Daycom, the information storage system needs only one operator for all controls including cassette control operation from a single keyboard. 500,000 character systems

storage capacity provides flight schedules for up to 3,000 flights on a single cassette, the company says, and features automatic inserting of all new flights.

Circle Reader Service Card No. 21

## Numeric Indicator

Hewlett-Packard Co., Palo Alto, Calif., offers their Model 5082-7300 Solid State Numeric Indicator. The display has its driver-decoder and memory along with 21 light-emitting diodes mounted on the ceramics substrate, the company claims, and can only be addressed with a 4-line, BCD positive logic input. Characters are 0.290 inches high and the displays come in a 0.4 by 0.6 inch, dual in-line package configuration.

Circle Reader Service Card No. 22

## Advertisement Package

A software package for compiling newspaper classified advertisements has been announced by Digital Equipment Corp., Maynard, Mass., for the company's Typeset-8 computer-based typesetting system. The firm claims the program scans all advertisements on a character-by-character basis until a complete sort is achieved, then sorts and places each advertisement in proper sequence at the same time it is stored on magnetic tape. The unit is designated Classified Ad Storage II and accepts paper tape output from a DEC Typeset-8 hyphenation and justification program.

Circle Reader Service Card No. 23

## LOW COST DIGITAL DISPLAY and COUNTER MODULES

featuring:

- Seven Segment Display
- Memory
- High Frequency Anti-Blur Circuits
- Plug-In Flexibility
- TTL Compatible

FOR ADDITIONAL INFORMATION WRITE OR CALL:

**TRONIX INCORPORATED**

TRONIX INCORPORATED p. o. box 349, phillipsburg, n. j. 08863 (201) 859-3944

## FREE YOKE SELECTION KIT


Information you need to know about selecting and specifying a precision yoke for your CRT display. Indicates the interaction between circuitry, CRT and yoke. Includes an application checklist to simplify your work. Send for your kit.

SYNTRONIC INSTRUMENTS, INC.  
100 Industrial Road Addison, Ill. 60101 (312) 543-6444

# syntronic

## RSS-4DP/S-R

If you need a sensible, economical, accurate and easy to operate graphic digitizing system, we at the H. DELL FOSTER CO. would like to talk to you about the RSS-4DP/S-R Digital Planimeter/Scaler-Recorder.

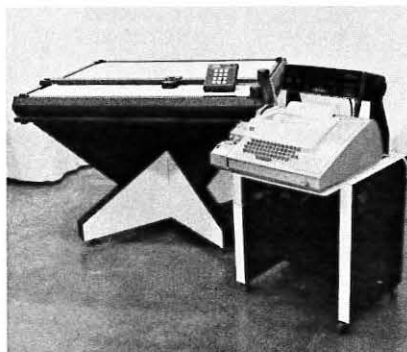

The basic system includes the following standard features:

- A 36" X 42" digitizing area. (Larger tables are available.)

- Rotary optical encoding system. .001" digitizing resolution.

- ±.001" digitizing accuracy and repeatability.

- Six digits and sign in each axis.

- Area measurement capability with the Digital Planimeter.

- X-Y scaling capability.

- ASR-33 Teletype and interface for recording capability. (Other recording devices and interfaces are available.)

- A basic system price under \$10,000.

Let us give you further details on this second half of the computer graphics story at H. DELL FOSTER CO. Call us. Let's talk about it.

**H. DELL FOSTER CO.**



San Antonio Office  
14703 Jones — Maltzberger Road  
Route 10, Box 239

San Antonio, Texas 78216  
Telephone: 694-3476 Area Code 512

## Computerized Plotting Language

Tymshare Inc., Palo Alto, Calif., announces a non-programmer application language called EASYPLOT, developed to simplify computerized plotting. According to Tymshare, the language features program editing from an existing data file and/or the terminal with editing; the ability to plot data generated by programs written in any computing language; automatic, semi-automatic and manual scaling options; log, semi-log and linear scaling; and instructions for drawing grids and axes.

Circle Reader Service Card No. 27


## Interactive Graphics Terminal

Princeton Electronic Products Inc., North Brunswick, N.J., announces the PEP-801 interactive graphics terminal. According to Princeton, the terminal, which utilizes the Lithicon silicon storage tube as a refresh memory, offers high density alpha-numeric (as many as 6,000 characters on a 14 in. screen), electronic zoom, selective editing of characters or vectors, high resolution vectors, long image retention and ability to refresh additional slave terminals.

Circle Reader Service Card No. 28

## CRT Power Supplies

Venus Scientific Inc., Farmingdale, N.Y., has introduced a trio of high voltage power supplies said to fulfill the requirements of 95% of preci-

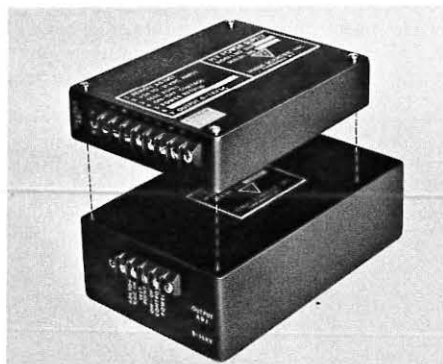

sion CRT display applications. These units, designated: D-16, an adjustable anode supply 8-16 kV @ 1 mA; E-10, a 0-1 kV @ 10 mA focus supply; and E-30, a 0-3 kV @ 5 mA focus supply, are regulated dc to dc converters featuring 100 PPM stability. According to Venus, input power requirements are +24 to +31 Vdc, and all power supplies will regulate to .003% for variations over this range.

Circle Reader Service Card No. 29

## Mini-Computer Printer

The Shepard Div. of Vogue Instruments Corp., New York, N.Y., introduces the 880E, a printer designed to meet mini-computer printing requirements. The company claims the unit is intended for both on-line and off-line applications, has a full line 80 character buffer and has a speed of 400 lines a minute at a print line width of 80 characters. The system includes IC Logic and MOS memory and can be installed in mini-computer locations.

Circle Reader Service Card No. 30

## Top-of-Page Formatting

Versatec Inc., Cupertino, Calif., offers electrostatic printers with top-of-the-page formatting

on fan-fold paper. According to Versatec, top-of-page formatting increases the effective operating speed of the Versatec Matrix 300 printer by providing rapid paper advancement at the end of text, and enables matrix printers to produce standard 8½ x 11 in. formatted pages. The Matrix 300 prints at 300 lines per minute and has over 3 ips slow speed and produces 80 characters per line on 8½ in. wide paper.

Circle Reader Service Card No. 31

## Fiber-Optic Readout

A miniature 7-segment readout with a fiber-optic dot pattern character has been announced by Master Specialties Co., Costa Mesa, Calif. The company claims Model 903 readouts are housed in precision molded enclosures, utilize 30-mil diameter optical fibers to transmit light to the 0.32 high by 0.19 wide character pattern, have individual standard plug-in bulbs to simplify maintenance and crimp type connectors to permit fast panel wiring.

Circle Reader Service Card No. 32

## Data Modems

Phonocopy Inc., Stamford, Conn., announces the introduction of a series of digital and analog data modems, designated the PH4000 Series; the family includes the 4000 A (analog version), the PH4000SD (synch digital), and the PH4000ND (non synch digital). According to Phonocopy, the models are designed with an automatic gain control which compensates for line attenuation, and specifically for the transmission of pictorial information. The units are compatible with Western Electric Series 500 hard sets, DAA hard wire for DDD lines or hard wire to leased lines.

Circle Reader Service Card No. 33

## Numeric Display

The Microwave and Optoelectronics Div. of Fairchild Camera & Instrument Corp., Palo Alto, Calif., offers a solid-state six-digit numeric display — the FND21. The model has individual monolithic digits, with decimals after each, on a common ceramic substrate. The unit can be plugged into standard DIP sockets or soldered to a pc board. The FND21 is designed for multiplex drive applications only. Said to be IC compatible, the product houses six digits, and power usage is less than 5 mA per segment at 1.8 V. The characters are .122 in. in height and feature a viewing angle of 160°.

Circle Reader Service Card No. 34

## SANDERS 70% OFF

720 Data Displays/Controllers

ALSO

CCI CC-30

Communications Station

CALL ..... 617/227-8634

We buy/sell any MINI

**AMERICAN USED  
COMPUTER CORP.**

15 School St., Boston, Mass., 02108

Circle Reader Service Card No. 35

INFORMATION DISPLAY, March/April 1972



## CRT Terminal

The introduction of a message-oriented CRT computer terminal has been announced by the Interactive Terminals Corp., a subsidiary of The



Bendix Corp., Southfield, Mich. The Model 4390 Communications Terminal is compatible with teletypes and has an on-site editing capability. Features include the following: an alphanumeric keyboard; numeric key pad; non-glare, 40 or 80 character/line display; switch-selectable transmission control; multiple interface capability; protected formats, field data manipulation, tabbing and line and character insertion/deletion, according to the company.

Circle Reader Service Card No. 36

## Communication Terminal

Computer Communications Inc., Inglewood, Calif., announces the CC-30 Communications Station, featuring the capability to generate

and display the full APL Character Set on a standard black and white or color television set. The company states, the units consist of a CC-300 TV receiver, a CC-301 TV Display Controller, a CC-302 Telephone Coupler or Dataphone Interface and a CC-303 APL Keyboard designed to resemble a common APL keyboard.

Circle Reader Service Card No. 37

## Macro-Assembler

A relocatable macro-assembler for mini-computers has been introduced by Proprietary Software Systems Inc., Los Angeles, Calif. Designated Mini-Dual, the company claims the software will operate in extremely small memory environments — as low as 8K bytes. The unit includes external symbols, relocation, data definition directives, macro definition directives and intrinsic functions to scan arguments of source statements.

Circle Reader Service Card No. 38

## Solid State Light Diode

Bowmar Canada Ltd., Ottawa, Ontario, Can., announces a line of solid state devices. The firm says red light emitting diodes emit a visible radiation when biased in the forward direction, and are available with typical intensities of 300 ft. Lamberts at 20ma. The devices are available in standard TO-18 or lead frame packages with plastic lenses and are suited for pilot lights, indicator lamps and point light sources.

Circle Reader Service Card No. 39

## CONSULTING

Are you using consultants, consulting, or planning a consulting career? Keep up-to-date on what's going on in the real world of consulting: ethics, contracts, names, news, case histories, fee structures, marketing of services, consulting economics, and much more. Subscribe to CONSULTING NEWSWORLD.

Read and use its Consulting Opportunities Sections

- Consulting Contracts Open
- Acquisition (practice) Wanted
- Merger (of practices) Wanted
- Practice Wanted or For Sale
- Consultant Wanted

This concise and comprehensive bi-monthly newsletter ties all facets of consulting together for you. If you are in any way involved with the consulting world or with those in it, you will definitely benefit from reading CONSULTING NEWSWORLD regularly. The newsletter is applicable to all fields, government agencies, specialties, institutions, and industries.

Start your annual subscription right away. Don't miss this coming issue. Just write your name and address on your check for \$8.50 and send it to:

**CONSULTING NEWSWORLD**  
National Consulting Register  
P.O. Box 42576-W  
Los Angeles, Calif. 90050



W-F PRODUCTS INC.



This AUTOMATIC COPY SYSTEM consists of a table mounted perforated Platen connected by flexible tubing to a vacuum control cabinet. Copy is held perfectly flat without edge hold-downs. Vacuum is terminated immediately after shutter closure, allowing film pull-down time to be used for changing copy. The system paces the operator and results in improved production rates and higher quality microfilm. May be used with any conventional microfilm camera.

Options include platen size and provision for image identification. Specify camera Make and Model when requesting quotation.


### OTHER MICROFILM PRODUCTS

- ★ Microfiche Format Coordinator
- ★ Quality Control and Editing Readers
- ★ Photocopy Lamp Regulator

Phone (303) 744-6097  
1107 SOUTH PEARL STREET  
DENVER, COLORADO 80120

## RSS-700

The H. DELL FOSTER CO. is proud to introduce the newest number of its fine computer graphics team, the RSS-700 Automatic Digital Drafting System.

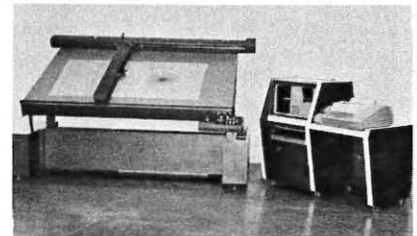

Check these qualifications against those of any other plotting system:

D.C. printed circuit motor drive with digital optical encoder feedback to simulate stepping motors with variable step size.

Many real-time mathematical calculations hard-wired in the system controller to appreciably reduce computer time.

Operational software included in system price.

Complete add-on graphic digitizing capability.

42" X 72" plotting surface.

.0005" resolution.

±.001" accuracy and repeatability.

Numerous, optional I/O devices.

Basic system price — under \$50,000.

Sound like a useful addition to our team? We think so too. For more detailed information, contact us at the address or number below. We'd like to really get into it with you.

**H. DELL FOSTER CO.**



San Antonio Office  
14703 Jones — Maltsberger Road  
Route 10, Box 239  
San Antonio, Texas 78216  
Telephone: 694-3476 Area Code 512



**HOW** do you put an idea together and get someone to accept or act on it as you want him to? What is the best way to understand other people's ideas and not be unduly influenced by them? Here is the book that will tell you how:



by **W. A. Mambert**

180 pages, 6" x 9", index

\$6.95 cloth,  
\$3.95 paper

**Do you have to . . .**

- write a personal resume . . .
- write a sales bid, proposal, or estimate . . .
- demonstrate a product or technique . . .
- conduct or take an interview . . .
- write a letter, note, or memo . . .
- write a technical or business report . . .
- speak extemporaneously . . .
- converse face-to-face with someone . . .
- write a class assignment . . .
- present a lecture or paper . . .
- discuss or debate an idea or proposal . . .

**Then you need to read this book!**

----- **MAIL TODAY** -----

INFORMATION DISPLAY  
825 S. Barrington Ave.,  
Los Angeles, California 90049

Please send me:

**THE ELEMENTS OF EFFECTIVE COMMUNICATION**

\_\_\_\_\_ copies @ \$6.95 (cloth)

\_\_\_\_\_ copies @ \$3.95 (paper)

My check for \$\_\_\_\_\_ enclosed or my purchase order # \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

## Correspondence

Nov/Dec Issue

Sirs: I liked the Nov/Dec article on plotters.

P. Campoli  
MIT  
Cambridge, Mass.

Sirs: The article on "Discernibility of CRT Gray Shades" in the Nov/Dec issue was very informative.

J. Gailhard  
Norden  
Norwalk, Conn.

Sirs: I was very pleased with your articles on display fonts and gray shades.

E. Potter Jr.  
Norden Div. UAC  
Norwalk, Conn.

Starting the New Year

Sirs: The technical content of the articles "An Autostereoscopic Three Dimensional Display" and "Transparent, Conductive Coatings of Indium Oxide" were excellent and timely — a good way to start the new year!

K. Wadman  
Mitre Corp.  
Bedford, Mass.

Sirs: I liked the article about three-dimensional displays in the Jan/Feb issue.

A. Bell  
Hughes Aircraft Co.  
Oceanside, Calif.

Sirs: I was delighted with the guest editorial and the article on "An Autostereoscopic Three Dimensional Display" by Stover in your Jan/Feb issue.

F. Lewis  
James Millen Mfg. Co. Inc.  
Malden, Mass.

Good Work

Sirs: I think your articles are great. Keep up the good work.

H. Peprnik  
Ferranti Packard Ltd.  
Toronto, Canada

Sirs: The articles in the Nov/Dec issue were very good as usual.

C. Messer  
NASA  
Marshall Space Flight Center, Ala.

Sirs: All I can say is "Very good!"

S. Ostu  
Fujitsu Ltd.  
Kawasaki, Japan

Sirs: Your publication is generally very good.

T.W. Kaplan  
COM Display Systems Co.  
Lowell, Mass.

Advertising

Sirs: A breakthrough in trade publication advertising! You have the honor, as far as I know, of being the first trade magazine to show a woman nude from the waist up — and on the editorial page, no less. (I like your choice of editorial headline.) Hugh Hefner, watch out!

E.W. Lord  
Burroughs Corp.  
Plainfield, N.J.

[Research-minded readers who may have missed our Nov/Dec '71 issue, referred to above, may order a copy (while the supply lasts . . . it's fast becoming a collector's item). The unintentionally risqué headline cited by Mr. Lord reads, "Unified Display Measurements." — Ed.]

Sirs: I enjoy each issue of *ID*, and I particularly enjoy the ads.

J.B. Allen  
Texas Instruments  
Dallas, Tex.

We Want More

Sirs: There are not enough technical articles in *ID*. I also think your print has poor readability.

G.R. Spencer  
Raytheon Co.  
Quincy, Mass.

Erratum

Sirs: Recently, the guest editorial on p 8 of the Jan/Feb issue was brought to my attention. In describing a series of inventions in the display field, the author lists "charactron" in an apparently generic manner without capitalization or other trademark identification.

I am sure that the failure to properly identify "Charactron" as a trademark was inadvertent, since other trademarks mentioned in the editorial were capitalized. However, it is important that the trademark be used properly since excessive use in a generic manner could cause a loss in value of the trademark, which is a valuable company asset.

J. Duncan  
Stromberg Datagraphix Inc.  
San Diego, Calif.

## Advertisers

Lear Siegler Incorporated . . . . .	31
National Consulting Register . . . . .	35
Owens-Illinois Incorporated/ Digivue . . . . .	2,3
RCA Electronic Components . . . . .	8
Ramtek Corporation . . . . .	4
Special Purpose Tube Company . . . . .	30
Syntronic Instruments Incorporated . . . . .	33
Tronix Incorporated/ Syscon Division . . . . .	33
W. F. Products . . . . .	35
Academic Press . . . . .	28
Amperex Electronic Corporation . . . . .	39
Burroughs Corporation . . . . .	Back Cover
Computing Devices of Canada, Limited/A Subsidiary of Control Data Corporation . . . . .	22
H. Dell Foster Company . . . . .	34,35
Gould Incorporated/ Data Systems Division . . . . .	32

INFORMATION DISPLAY, March/April 1972

**NOW AVAILABLE—**

# A line of cathode ray monitor tubes



**...developed specifically  
for computer terminals  
and other information displays.**

- A range of sizes, 4 inches to 15 inches diagonal
- High resolution from center to edge, assuring good legibility of characters
- Excellent ratio of usable screen to total bulb size
- Flicker-free picture, reducing eye fatigue
- Good price/performance ratio

For more information on these professional CRT's for monitor applications, contact us by mail or phone:  
Electro-Optical Devices Division, Amperex Electronic Corp.,  
Slatersville, Rhode Island 02876.  
Telephone: 401-762-3800



**Amperex®**

TOMORROW'S THINKING IN TODAY'S PRODUCTS

Sold Through  
NORTH AMERICAN PHILIPS ELECTRONIC COMPONENT CORPORATION



# SELLS ON SIGHT



## superior readability that competitors can't match

One look at an operating SELF-SCAN<sup>®</sup> panel display and you will know why you should be featuring one in your system. SELF-SCAN displays are a new solution to the operator machine interface that provides advantages to the system builder, to the system user, and to the system operator.

You can offer your customer the advantage of a custom-stylized unit that his operators can use efficiently. SELF-SCAN panels are measurably superior to CRT for operator accuracy while significantly reducing fatigue level in day in-day out high volume production applications.

The 0.2" high characters are in the popular 5x7 dot matrix format and are made up of dots on .040" centers. The unit is ASCII compatible and displays a modified 64-character ASCII character set.

256-character display subsystems are available from stock for immediate delivery. Call or write Burroughs Corporation, Electronic Components Division, Box 1226, Plainfield, New Jersey 07061, Phone: (201) 757-3400. Ask to have a Burroughs sales engineer stop by your office and show you his 256-character SELF-SCAN panel, keyboard, and power supplies packaged in a standard Samsonite<sup>®</sup> briefcase.

Burroughs 